

UK'S LEADING MANUFACTURER OF LIVESTOCK EQUIPMENT



JANUARY 2026



Founded in 1969, IAE are the UK's largest and leading manufacturer of livestock housing and handling equipment, equestrian stabling, industrial fencing and shelters. The company remains to be owned by the same family who set it up 55 years ago, and now employs over 450 people, which we are committed to investing in. IAE is based on a purpose built, 38-acre site which is situated on the edge of Stoke-on-Trent in Staffordshire. The state-of-the-art production facility features an extensive range of automated processes, ranging from robotic welding technology to automated material handling and also includes our own in-house galvanising facility. Our ability to design, manufacture, assemble and distribute from this unique operation allows us to offer our customers a complete range of high quality, unrivalled products like no other.



### Galvanising



Our in-house galvanising plant allows us to precisely control our galvanising process to ensure that the finished product is durable to all intended applications. All of our products are galvanised to meet BS EN ISO 1461.



### Distribution

Our distribution yard ensures the safe loading of all trailers in a timely manner. We aim to hold bulk stock of many products where possible.



### Nationwide Delivery

Our unmistakable fleet of 13 lorries, along with their drivers and our logistics team ensure that all of our products reach their end destination.



### Assembly

All of our products are built up in the assembly building. The assembly department brings the product to life as hundreds of components are fitted together to create the finished product.



### Production

Our 108,000 sqft production facility includes state-of-the-art automated processes, such as robotic welding technology and automated material handling. Additionally, a number of MIG welders operate from the production facility, fabricating items that cannot be welded in an automated manner.



### Headquarters

MFHQ is home to all of our office based departments, which includes Product Development, Sales and Customer Services. Being situated in the same building allows for easy communication between departments, ensuring the customer experience is effortless.

# Contents

## Agricultural Projects

01	Agricultural Projects	5 -7
----	-----------------------	------

## Cattle

02	Cattle Crushes	8-19
03	Weigh Systems	20-21
04	Fixed Cattle Handling	22-27
05	Portable Cattle Handling	28-37
06	Feed Barriers	38-45
07	Cubicle Housing	46-55
08	Ag-Fit	56-61
09	Bull Penning	62-65
10	Portable Cattle Feeding	66-71
11	Calf Rearing	72-76

## Sheep

12	Lambing Equipment	77-78
13	Sheep Housing	79-81
14	Sheep Handling	82-95
15	Portable Sheep Feeding	96-101

## Water/Hayracks and Troughs

16	Water Troughs	102-107
17	Hayracks and Troughs	108-111

## Gates

18	Gates	112-121
19	Fencing	122

## Miscellaneous

20	Dog Penning & Food Storage	123
----	----------------------------	-----

## Equestrian

21	Equestrian	124-127
----	------------	---------

## Industrial


	Industrial	128-129
--	------------	---------

## General Information

	Corrosion	130
	Index	131
	Terms & Conditions	132-133

# BUYING FROM IAE

For stock product and account enquiries please contact your local Area Sales Manager, or call our head office for any enquiries  
Tel: 01782 339320

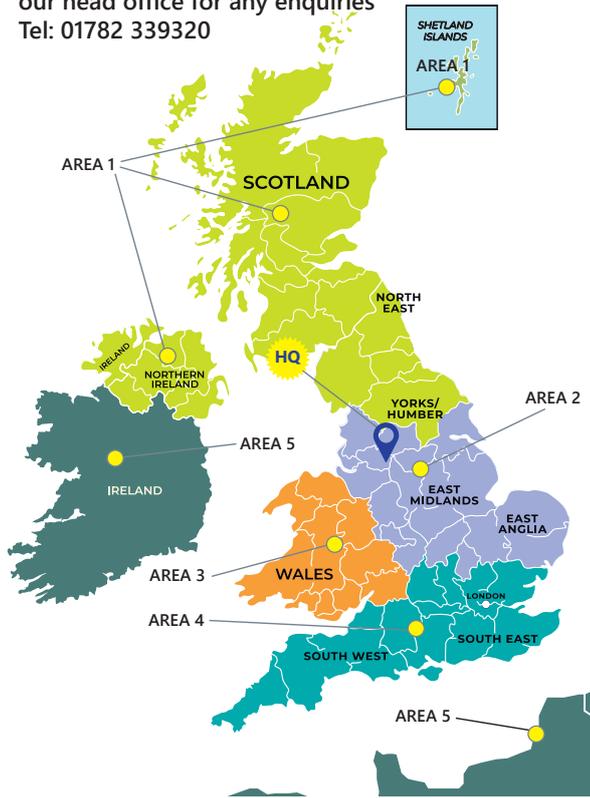

### Area 1 Andrew Sempey

For Scotland, Northern Ireland Cleveland, Cumbria, Durham, Northumberland and North Yorkshire  
Mobile: +44(0)7748 116673  
Email: andrew.sempey@iae.co.uk

### Area 2 Jason Walters

For Lancashire, West Yorkshire, Staffordshire, Cheshire, Derbyshire, Nottinghamshire, Norfolk, Suffolk and Cambridgeshire.  
Mobile: +44(0)7525 767506  
Email: jason.walters@iae.co.uk

### Area 3 Sion Evans

For Gloucestershire, Hereford, Worcester, Shropshire and Wales  
Mobile: +44(0)7976 176043  
Email: sion.evans@iae.co.uk

### Area 4 Andrew Lowe

For Avon, Cornwall, Devon, Dorset, Somerset, Wiltshire, London, Kent, Essex, Surrey, Sussex, Oxfordshire and Hampshire.  
Tel: +44(0)7771 921573  
Email: andrew.lowe@iae.co.uk

### Area 5 Export Sales:

**Laura Middlehurst**  
Tel: + 3365273 5956  
Email: laura.middlehurst@iae.co.uk

**Andrew Davies**  
Tel: +44(0)1782 339320  
Email: andrew.davies@iae.co.uk

All IAE products are available from our extensive network of dealerships throughout the United Kingdom. We have approximately 450 dealers located all across the UK.

## Prices

Our price list can be viewed by scanning the QR code. The QR code on this page will scan to a full price list of every product. Hereafter, a QR code located on the opening page of each section will scan to a price list for the products within that section. All prices shown are RRP and exclusive of VAT.



## Terms and Conditions

Customers must accept that F. Klucznik & Son Ltd's Terms and Conditions apply when placing any order. The full Terms and Conditions are available at the back of this brochure or alternatively can be viewed on our website.

## Hot Dip Galvanising

Unless otherwise stated, all products are Hot Dip Galvanised to the standard of BS EN ISO 1461. For further information about the galvanising process, visit [www.galvanizing.org.uk](http://www.galvanizing.org.uk)

## Carriage

A carriage charge will be applied on all deliveries to a dealer's premises where the cumulative value of orders does not exceed £2,000.00 net (excluding VAT). Further charges are also applicable where direct delivery is requested dependent on geographical location and access.

## Production 4 and the Customer Experience Centre



GALVANIZERS ASSOCIATION

RIDBA

For more information please contact our Head Office +44(0)1782 339320

[f](#) [i](#) [p](#) [t](#) [v](#) @IAE1969

We recognise that not all agricultural buildings and farms are the same, which is why we offer our made to measure service. Whether it be a specific design, special length or some general changes that you require, we are able to manufacture a solution that is tailored to you.



Sheep Housing Unit

Installations of a sheep-housing project, which included bespoke feed fence barriers at the University of Lincoln, Riseholme Park Farm were completed just ahead of their lambing season commencing. The building has been refurbished from an old cattle building to now become an indoor lambing facility that is more than capable of housing up to 400 in-lamb ewes.

Our Projects team worked closely alongside Riseholme Park Farm to design a solution that would meet all of their requirements. A particularly important requirement to the farm was that the solution would be flexible and portable and so because of this, all of the equipment can be dismantled in under an hour, leaving a completely flat and clear floor space that can be used for alternative purposes outside of the lambing season.

Our Projects team designed and supplied the equipment for this fixed cattle handling system for a customer located in Staffordshire. A key requirement for the customer was that the system needed to fit within a pre-allocated area. Therefore, the system was designed to adjoin the pre-existing cattle housing unit, allowing the handlers to run the cattle straight from their shed to the handling system for routine tasks such as foot trimming, worming, drenching and pregnancy diagnosis testing.

Unique to this system is an increased handling capacity, by making use of holding pens which feature a dog leg within the external panels to increase the number of animals able to fit within the pens. A second unique feature to this system, was additional loading and unloading pens, that was requested by the customer to enforce safe loading and unloading of cattle.

The customer also chose to include a Crusader Plus cattle crush at the front of their handling system, complete with a Cattle Crush Extension to allow for a safe working area to the rear of the cattle crush.



Bespoke Cattle Handling System

The Projects team had the pleasure of being awarded the contract to design and supply the internal penning and handling systems at a brand new, state-of-the-art, research facility at the University of Edinburgh. The Large Animal Research and Imaging Facility (LARIF) received funding from the University of Edinburgh, the Centre for Innovation and Excellence in Livestock (CIEL) and the Wellcome Trust.

The LARIF offers users the opportunity to capitalise on a wide range of expertise in farm animal production, health and welfare including infectious disease zoonoses, vaccines, genetics and genome editing, imaging, radiology, medicine, surgery and critical care. The equipment we designed and supplied to the facility was suitable for use by cattle, sheep and pigs of all ages, which therefore meant we included a bespoke stockboard fixed sheep handling system, as well as a bespoke cattle handling system to include a suitable cattle crush.



Edinburgh University Research Facility

Our Projects team, working closely alongside our Area Sales Managers have a vast knowledge of designing the layout and supplying the internal equipment for a huge range of dairy housing facilities. From existing sheds to complete new builds, the team are able to adapt the solution to suit the needs of the cattle and the farmer.

We can calculate your exact requirements based upon your intended stocking rate, meaning that your housing solution will contain enough cubicles, feed fence space and waterers to accommodate for the whole herd. Pictured here is a dairy housing unit we completed in the South West which includes Ultima cubicles, Yokemaster feed fences, 3 rail up and over gates, free standing tipping water troughs, sheeted gates, yard gates and a bespoke cattle race.



Bespoke Dairy Housing Unit



For those larger or more specialised projects, our Special Projects team are hand to not only assist with the concept generation and design, but to also manage your project requirements from IAE throughout the whole process. They will work closely alongside you to ensure all of your expectations are met within a realistic time frame. If you require assistance contact our Project Sales Managers (p.7).

For over 25 years IAE has had the pleasure of working with many prestigious livestock markets within the UK to help redevelop and supply the internal animal handling equipment. This often includes handling systems, animal penning, loading bays and sales rings.

We are able to offer assistance with the design and development process all the way through to the installation and our dedicated team will always aim to incorporate animal health and welfare considerations into their designs whilst trying to maximise floor space utilisation. In doing all of this, we work hard to ensure the highest possible levels of bio-security are met.


## ROUNDHOUSES

IAE are proud to be working in association with ID Agro and Roundhouse Building Solutions Ltd to supply the internal housing and handling equipment for the modern Roundhouse® building. Our Special Projects team have built a wealth of knowledge in relation to equipping roundhouses with the right equipment for the right livestock, as well as ensuring that operator safety is maximised.



### The Roundhouse® Concept

The Roundhouse can be characterised by its simplistic design which prioritises animal health and welfare, work convenience and cost-efficiency. Originally designed for beef cattle, the Roundhouse also lends itself well to dairy cattle, sheep, goats and young stock rearing. A diameter of 30.25mtrs allows for 718m<sup>2</sup> of available floor space which can be divided into segments.

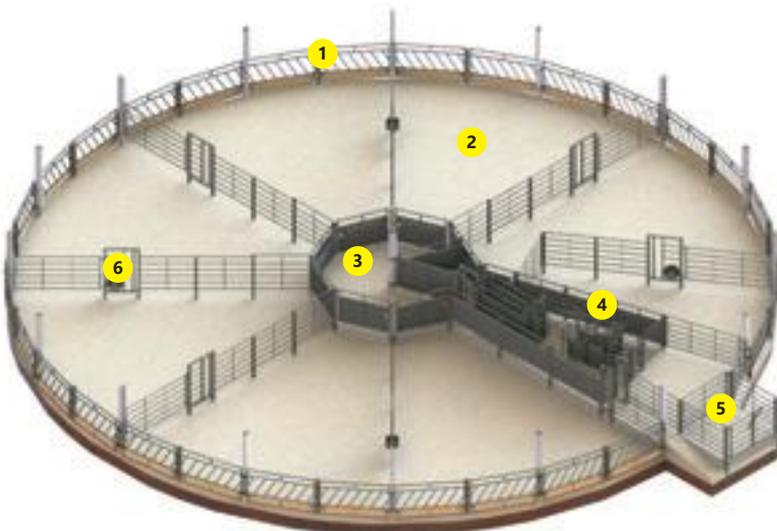

1. A feed fence forms the external barrier to the housing. Allowing a single operator to feed around the perimeter of the Roundhouse
2. Typically the Roundhouse is split into pens that branch outwards from the centre
3. Animals can be placed into the control area whilst the handler mucks out the pens
4. A full handling system accessed from the control area allows the handler to complete routine treatments such as foot trimming and TB testing
5. For safe removal of animals from the Roundhouse, a loading bay is incorporated into the design
6. Man-access points between each pen are a valuable feature for either allowing access or egress in emergencies

Our dedicated team are able to offer a wealth of practical and technical knowledge that they have gained through many years of experience within the industry. These factors combined with the first-class manufacturing capabilities at our Headquarters, in Stoke-on Trent, allow us to offer a tailored service which will meet all your requirements.

## OUR SERVICE



### CONCEPT

The concept phase includes an initial call, to gain a better understanding of your ideas and requirements in order to ensure that your bespoke solution is fully tailored to satisfy your needs.



### DESIGN

Our in-house design team will then refine those discussions into dynamic and detailed drawings that will accurately reflect all of your requirements.



### MANUFACTURE

All of your equipment will be manufactured on-site at our headquarters in Stoke-on-Trent, where we are able to ensure the highest standards of quality from the initial welds right through to the Hot Dip Galvanising.



### AFTERSALES SUPPORT

Our dedicated Customer Support team are on hand from the day of completion of your project to provide any further aftersales support that you may require.



If you require assistance planning your next project, do not hesitate to contact our experienced team as they are here to assist you.

## PROJECT MANAGERS:

Contact your local Project Manager for assistance with your up and coming projects.

### On Farm Projects:

#### North: Martin Dearden

Mobile: +44(0)7771 921575  
Email: martin.dearden@iae.co.uk

#### Midlands & North Wales: Sean Weston

Mobile : +44(0)7771 921572  
Email : sean.weston@iae.co.uk

#### South: Marcus Selway


Mobile : +44(0)7887 687151  
Email : marcus.selway@iae.co.uk

### Special Projects:

To include Livestock Markets, Roundhouses, Zoos, Research Facilities and Universities

#### Mark Dodd

Mobile: +44(0)7771 921577  
Email: mark.dodd@iae.co.uk

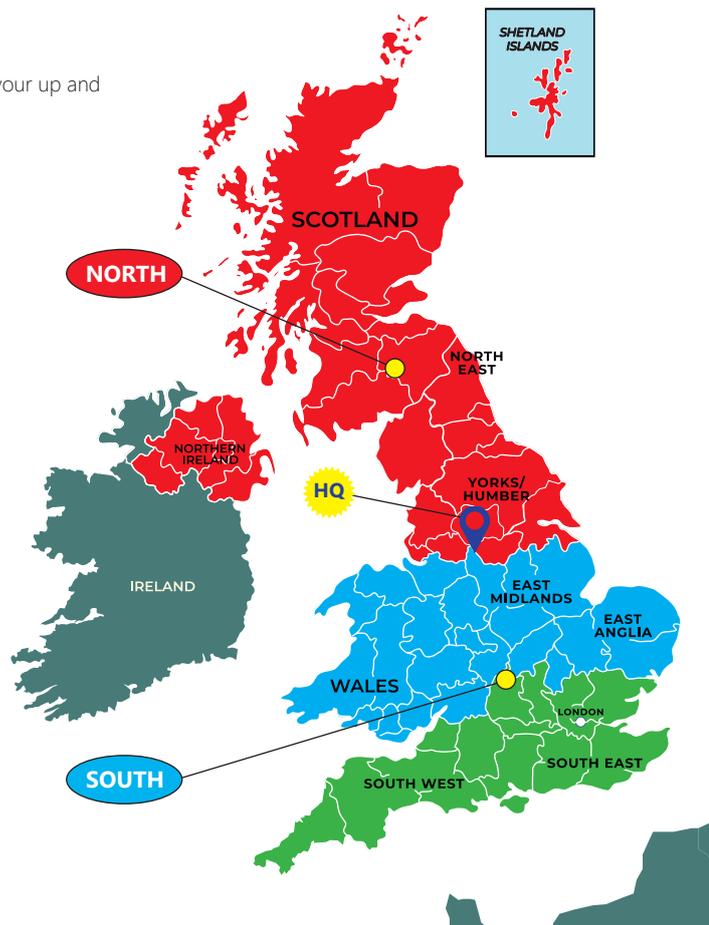

# THE BENEFITS OF A CATTLE CRUSH

The most significant part of any handling system is a fully functioning and robust cattle crush that is capable of handling livestock of all sizes and temperaments.

The correct cattle crush is able to reduce animal stress whilst significantly improving both animal and handler safety.

The correct crush, accompanied with the right accessories, also offers the ability to make routine tasks and procedures much more manageable and efficient.

It is important to consider the purpose of your cattle crush before you purchase it and what additional items you may require to aid your livestock enterprise, such as a Super Scoop or Foot Trimming Kit.





We are able to offer a full range of modern and unique cattle crushes that have been specifically designed to cover all aspects of cattle handling and provide you with real solutions to effective and efficient handling.

Featuring 84 Acoustic Dampening Points (ADP) the M800 Squeeze is the quietest, most feature packed crush IAE has ever produced. The marriage of the Manual yoke and the 800 Series Squeeze body provides a great platform for a wide range of cattle breeds and sizes.



Code 1002398-01

- 1** Releasing the operating lever locks the yoke, meaning cattle of all size can easily be handled. The operating lever can also be positioned anywhere along the length of the crush
- 2** Ergonomic squeeze to safely restrain a range of cattle sizes and where it stops, it locks
- 3** TB Access doors at the neck, along with four access doors on the body to provide exceptional access to the animal
- 4** Lightweight yet tough polymer baffles are easily accelerated to ensure fast yoking and a safe environment for cattle and handlers
- 5** Operation can easily be changed from right to left hand to suit on site requirements
- 6** 20mm thick, deep profile rubber floor with a 10mm tread depth to improve grip and reduce noise
- 7** Integrated lifting and load bar points as standard to improve manoeuvrability
- 8** Ratchet style backing up bar



# M800 FULL ACCESS

02

Where a squeeze body is not required the M800 Full Access provides a heavy duty facility with unbeatable access. Supplied with the Manual yoke and the 800 Series Full Access body, there are over 75 Acoustic Dampening Points (ADP) to ensure a quiet, safe and efficient handling experience.



Code 1002396-01

- 1** Releasing the operating lever locks the yoke, meaning cattle of all size can easily be handled. The operating lever can be positioned anywhere along the length of the crush
- 2** TB Access doors at the neck, along with four access doors on the body to provide exceptional access to the animal
- 3** Lightweight yet tough polymer baffles are easily accelerated to ensure fast yoking and a safe environment for cattle and handlers
- 4** Operation can easily be changed from right to left hand to suit on site requirements
- 5** 20mm thick, deep profile rubber floor with a 10mm tread depth to improve grip and reduce noise
- 6** Integrated lifting and load bar points as standard to improve manoeuvrability
- 7** Ratchet style backing up bar



Shown with optional extra front cage.

# A800 SQUEEZE

The A800 squeeze combines our revolutionary Automatic yoke with the 800 Series Squeeze body. A combination of 81 Acoustic Dampening Points (ADP) ensures a quiet, secure environment that outperforms many of the self-locking crushes in the marketplace.



Code 1002395-01

- 1** Patented one touch yoke reset allows all operations to be carried out intuitively with one handle. Unique gear synchronized yoke doors ensure effective locking even with uneven cattle load distribution
- 2** Ergonomic squeeze to safely restrain a range of cattle sizes and where it stops, it locks
- 3** TB Access doors at the neck, along with four access doors on the body to provide exceptional access to the animal
- 4** 7 yoke width settings from 100mm to 240mm to suit a wide range of cattle
- 5** Full length baffled yoke features full length straight bars to reduce the risk of choking if an animal goes down and eradicate leg traps
- 6** 20mm thick, deep profile rubber floor with a 10mm tread depth to improve grip and reduce noise
- 7** Ratchet style backing up bar



# A800 FULL ACCESS

02

Where the need for access outweighs a squeeze requirement the A800 Full Access gives an incredibly robust, self-locking crush with excellent access to all areas of the cattle's body. 72 Acoustic Dampening Points (ADP) ensure a calm and quiet working environment, helping you to improve your throughput and complete routine handling tasks quicker.



Code 1002397-01

- 1** Patented one touch yoke reset allows all operations to be carried out intuitively with one handle. Unique gear synchronized yoke doors ensure effective locking even with uneven cattle load distribution
- 2** TB Access doors at the neck, along with four access doors on the body to provide exceptional access to the animal
- 3** 7 yoke width settings built into the yoke from 100mm to 240mm to suit a wide range of cattle
- 4** Full length baffled yoke features full length straight bars to reduce the risk of choking if an animal goes down and eradicate leg traps
- 5** 20mm thick, deep profile rubber floor with a 10mm tread depth to improve grip and reduce noise
- 6** Integrated lifting and load bar points as standard to improve manoeuvrability
- 7** Ratchet style backing up bar



CATTLE CRUSHES



### Cattle Crush Extension

The easy fit, bolt on crush extension provides an extra 980mm of length, featuring a sliding rear gate to safely stop cattle in the race. Split side gates will lock in behind the animal, meaning the extension provides a safe working environment for a range of treatments and procedures. **Now also compatible with the optional foot trim kit.**

#### Key Features:

- The addition of the crush extension extends the length of the crush by 980mm whilst standing 2175mm high
- Any hand operated sliding door prevents the next animal in the race from entering the cattle crush
- The side access panels swing both outwards and inwards. Swinging and securing the bottom panel inwards can be useful for preventing the handler from being kicked by the animal
- Flip over catch can be used on one or both sides of the gate to lock the gate in position
- fitted with rubber floor as standard
- May require some self assembly

To see which cattle crushes the Cattle Crush Extension will fit to, see p.19

Code
1002145-01



### Rear Sliding Gate

- Stops the next animal in the race from entering the crush
- The sliding gate can be operated from either side due to the retractable sliding gear
- Flip over catch can be used on one or both sides of the gate to lock the gate in position

To see which cattle crushes the Sliding Gate for the rear of crush will fit to, see p.19

Code
1001686-01

### 800 Series EID Fitting Kit

Code
1003656-01

### M800 Cage EID Fitting Kit

Code
1003655-01

Supplied as a kit with all required fittings to attach an EID panel Reader, allowing the automatic reading of EID compatible ear tags when used in conjunction with suitable reader incorporated weigh head. The panel is fitted centrally above the cattle's head, giving high tag read success without impacting on access to the animal.



## MK 4.5 Superscoop®

The Superscoop® 4.5 is an essential addition to any cattle crush as it stabilises and restricts the side to side movement of the animals head, making tasks such as bolus delivery and ear tagging effortless. The Superscoop® also offers increased safety for both the animal and the operator, which is paramount. Our latest design includes a positive unidirectional lock and locking position for the scoop arm at rest. This is crucial for preventing accidental damage when not in use. In addition to this key upgrade, the internal components have also been up-graded to improve the reliability and longevity of the product.



### Features include:

- Improved plastic moulding for the scoop, offering greater strength whilst improving access to the head, reducing proximity to the eyes and minimising ear tag loss
- Locking ratchet mechanism using a concentric locking face and pawl allowing for an easy and quick release when under pressure, reducing strain on the operator and the animal
- A superior fixing bracket which offers a more stable point of rotation
- An extra-large diameter central pivot point distributes the load over a much greater area, significantly reducing the wear on the component
- Maintenance free central bearings designed from self-lubricating carbon filled PTFE, offer exceptional strength and wear characteristics
- Neat aesthetics featuring an all-internal mechanism, without reducing ease of maintenance
- May require some self assembly

Code	Product Information
F045 2200 30	Scoop only
1003653-01	A800 Scoop Fitting Kit
1003654-01	M800 Scoop Fitting Kit

To see which cattle crushes the Superscoop is compatible with, see p.19



### Foot Trimming Kits



#### Key Features:

- Adjustable front winch, clips and straps for raising the belly strap. This takes most of the weight of the cow and provides support
- Adjustable rear winch, clips and straps for raising the rear legs
- Two front and two rear foot blocks complete with ropes and two loose rear bolt on block housings
- Rear winch and strap can also be used to lift the front feet of the animal
- Foot Trimming Kits are available as a left hand or right hand operation

To see which cattle crushes the Foot Trimming Kit will fit to, see p19

Code
1002393-01

### Front Cage

- An easy to fit front cage that can be fitted to the Manual yoke. Useful when handling horned or aggressive cattle
- Front cage has a self-latching spring loaded up bolt and a rope return for fast, safe operation.
- Can be built to suit right or left hand operation.

Code
1003642-01



### Slotted Lugs on Drilled



Code
1003728-01

### Load Bar



Bolted directly to the crush at pre welded mounting points, load bars are an essential tool for monitoring the performance of your cattle, when combined with a compatible weigh head everything from DLWG, condition scoring and treatment history can be managed in one place.

### Sternum Bar



Code
1002705-01

Quickly fitted using 6 bolts, the Sternum Bar prevents cattle from going down in the crush. To prevent leg traps, the bar features a fully welded inset sheet. Not suitable for use with young stock.

The Crusader Plus is our entry level cattle crush, which is suited to both dairy and beef cattle and is fronted by a manual, lever operated yoke that is operated from either side of the crush. For maximum versatility, a spring loaded quick release adjustment gives 4 pre-set yoke widths from 100mm to 260mm.

Code F045 2012 03

For full specification, see p.19

#### Features unique to this product include:

- A hinged vet access panel built into each yoke leaf
- Two removable rails on each side of the crush allow access to the animal's flanks
- Fully sheeted bottom side panel on either side of the crush can be removed if required
- A flat treadplate floor provides ample grip for the cattle
- Ratchet style rump bar for keeping cattle forwards in the crush
- Rear gate fitted as standard
- Pallet fork lifting points welded to the top horizontal rails makes transporting the crush easy



## HIGHLAND

The Highland crush is designed to be specifically suited to cattle with horns yet is still suitable for non-horned breeds of cattle. Fronted by a manually operated scissor style yoke, the yoke arms retract fully into the sides of the crush to maximise the visibility for the animals and a simple winding system allows the yoke width to be set anywhere between 100mm and 280mm.

Code F045 2009 01

For full specification, see p.19

#### Features unique to this product include:

- A lever-style operating handle operates the yoke arms, making it quick and easy to yoke the cow as they enter the crush
- Two side doors, combined with a removable side rail on either side of the crush allow full access to the animal's flanks
- Slightly tapered treadplate floor provides ample grip for the cattle and helps to keep all four feet inside the crush when all access doors are open
- Ratchet style rump bar for keeping cattle forwards in the crush
- Rear gate fitted as standard
- Pallet fork lifting points welded to the top horizontal rails makes transporting the crush easy



## YEARLING CRUSH

The Yearling Crush is designed to be suited to younger and smaller cattle.

Code F045 2003 01

For full specification, see p.19

#### Features unique to this product include:

- Any-hand manual traditional lever operated yoke
- Spring loaded quick release adjustment of the yoke giving four pre-set widths between 90mm and 120mm
- The front cage is constructed from a fully opening side gate, a front gate and a fixed side panel, providing ample access to the cattle's head
- Rubber floor aims to provide grip and reduce slips
- A single side panel can be removed to provide access to the animal
- Supplied with a rear gate as standard



## Cattle Crush Extension



Providing a safe working area for those handling cattle in a crush is paramount. The Cattle Crush Extension provides a safe working area to the rear of the animal, which can be useful for pregnancy diagnosing (PD).

### Key Features:

- The addition of the crush extension extends the length of the crush by 970mm whilst standing 2175mm high
- Any hand operated sliding door prevents the next animal in the race from entering the cattle crush
- The side access panels swing both outwards and inwards. Swinging and securing the bottom panel inwards can be useful for preventing the handler from being kicked by the animal
- Flip over catch can be used on one or both sides of the gate to lock the gate in position
- A fully welded, flat treadplate floor provides the cattle with ample grip
- May require some self assembly

Designed to fit the Saracen and Chieftain product range.

Code
F045 2020 02

## Sliding Gate for Rear of Crush

- Replaces the rear gate of the crush
- Stops the next animal in the race from entering the crush
- The sliding gate can be operated from either side due to the retractable sliding gear
- Flip over catch can be used on one or both sides of the gate to lock the gate in position

Designed to fit the Saracen and Chieftain product range.

Code
F040 2008 04



## Bolt on Angle Slotted Lugs



- Supplied as a set of 4 vertical angle lug plates to fix onto the rear pillar of the crush
- Suitable to fix crush onto hurdles or race kiosk
- c/w fixing bolts to suit IAE cattle crushes
- Enables rear crush gate (where fitted) to still open
- Note: Will affect accurate weighing and foot trimming accessibility if kiosk or hurdles are connected to crush via lugs

Code
F040 2015 05

## Foot Trimming Kit



## Bolt on Slotted Lugs

- To fit sliding gates and posts
- c/w fixing bolts



Code
F040 2015 09

### Key Features:

- Adjustable front winch, clips and straps for raising the belly strap. This takes most of the weight of the cow and provides support
- Adjustable rear winch, clips and straps for raising the rear legs
- Two front and two rear foot blocks complete with ropes and two loose rear bolt on block housings
- Rear winch and strap can also be used to lift the front feet of the animal
- Foot Trimming Kits are available as a left hand or right hand operation

Designed to fit the Saracen and Chieftain product range.

**NB:** Not suitable for use with Extension or Sliding Gate

Code	
F045 2100 01	R/H Kit
F045 2100 11	L/H Kit

	LENGTH (mm)	BASE LENGTH (mm)	WIDTH (mm)	INTERNAL WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	LOAD BARS	PALLET LIFTING POINT	SUPERSCOOP®	HOOF TRIMMING KIT	REAR SLIDING GATE	REAR EXTENSION	KIOSK LUGS	READER UNIT MOUNTING BRACKET
 <b>A800 SQUEEZE</b> <b>1002395-01</b>	2360	2120	860	760 - 285	2230	695	✓	•	•	•	•	✗	✗	•
 <b>A800 FULL ACCESS</b> <b>1002397-01</b>	2360	2120	860	760	2230	535	✓	•	•	•	•	✗	✗	•
 <b>M800 SQUEEZE</b> <b>1002398-01</b>	2950	2120	860	760 - 285	2250	755	✓	•	•	•	•	✗	✗	•
 <b>M800 FULL ACCESS</b> <b>1002396-01</b>	2950	2120	860	760	2250	600	✓	•	•	•	•	✗	✗	•
 <b>CRUSADER PLUS</b>	2620	2438	840	740	1900	422	✓	✗	•	•	•	•	•	✗
 <b>HIGHLAND</b>	2775	2107	1300	740	1900	473	✓	✗	•	✗	✗	•	•	✗
 <b>YEARLING CRUSH</b>	2050		660	580	1560	186	✗	✗	✗	✗	✗	✗	✗	✗

- Compatible Fit
- ✗ Not Available
- ✓ Standard



## Weighing and EID Systems

Weighing is a vitally important component to better on-farm decision making and the weigh scale/data collector combined with EID equipment are the tools that enable you to begin this process. The investment in such technology will reap rewards in both the short and long term as a return can be realised immediately and over time there is the potential for a substantial return on the capital invested. Even farmers with high competence in assessing stock weights by eye will never be as accurate or as consistent at judging weight as a weigh scale.

The combination of EID technology and weigh scales makes weighing livestock an efficient process. The equipment reads quickly and is accurate every time, automatically matching the weight of the animal to its EID tag. Therefore, it offers improvements in traceability as with certain scales it is possible to see a full weight history of individual animals.

### Additional benefits of operating an EID weighing system:

- Monitor animal performance- a full history of weights can be obtained by regularly weighing livestock. This can highlight whether animals are meeting their target for daily live weight gain (DLWG)
- Improved animal health- Individual animals who aren't performing as well as the rest of the herd can be identified and investigated to determine the cause of the reduced DLWG
- Forecast optimum time for sale- by realising the DLWG handlers can calculate approximately when the animals will be at the correct weight for sale. This can help to ensure a maximum price is achieved per animal
- Increased accuracy of benchmarking and performance recording- Animals can be linked back to their sire or dam, allowing high performing genetic lines to be highlighted. This can aid the process of selecting replacement stock

## Weigh Scale Indicators

S3



- Easy to read weights, no matter the conditions
- Bluetooth low energy connectivity
- Record weights and configure settings using the app
- Rugged and waterproof
- Rechargeable battery with approx. 15 hours of life

CODE

880 0002-591

JR5000



- Stores up to 1 million records in 1000 weighing sessions
- Calculate and view animal's weight gain
- Simple and quick to set up
- Use pre-defined set-ups to easily switch between jobs
- Up to 5-way drafting by weight, weight gain and single criteria

CODE

880 0010-832

ID5000



- Store up to 1 million records in 1000 weighing sessions and record up to 3 IDs and 3 pieces of information for each animal
- Track and calculate animal's weight gain
- Up to 5-way drafting by weight, weight gain and single criteria
- Pre-loaded set-ups or save own favourite set-ups

CODE

880 0000-787

XR5000



- Store up to 1 million records in 1000 weighing sessions and record up to 100 pieces of information for each animal
- Range of features to track and visualise performance
- Up to 10-way drafting by any criteria
- Pre-loaded set-ups or save own favourite set-ups
- Calculate target weights

CODE

880 0000-182

XRP2i  
Panel  
Reader



- Reads all HDX and FDX-B tags with options to record or send to weigh scale
- Wirelessly connect with your weigh scale indicator
- Easily download recorded information to PC, laptop or smart phone
- Different Antenna options available to suit individual setup
- Up to 5-way drafting by weight, weight gain and single criteria
- Pre-loaded set-ups or save own favourite set-ups

CODE

880 0004-604

## Loadbars

MP600 Loadbars



- 2000kg weighing capacity
- 600mm wide
- 561mm fixing centers
- Also sold in 800mm

CODE

880 0000-202

HD5T Loadbars



- 5000kg weighing capacity
- 1010mm wide

CODE

880 0004-

## Stick Readers

SRS 2i  
Stick Reader



- Quick access keys for simple navigation
- Wirelessly connect with your weigh scale indicator using Bluetooth
- Practical and safe to use with long reach

CODE

880 0004-657

XRS 2i  
Stick Reader



- Alphanumeric keypad for flexible data entry
- Customisable alerts such as cull
- Add and edit session names to keep track of each session
- capture animal information such as condition scores, in up to 15 custom data fields

CODE

880 0004-656



# BENEFITS OF A FIXED CATTLE HANDLING

Handling cattle, whether to complete routine procedures or to treat ill health, is an inevitable part of livestock production. In addition to this, it can also be a dangerous task, especially when handling cattle that are not used to regular human interaction.

A fixed cattle handling system offers the perfect opportunity to mitigate such risks, as it comprises of a whole range of beneficial features that have all been designed with operator and cattle safety in mind.

As well as safety considerations, minimised stress is an integral part of cattle handling. Scientific research indicates clearly that cattle can be adversely affected by the stress of handling, which goes on to impact the health, growth and reproduction of cattle as well as the profitability of the enterprise.

By considering the latest theories in animal handling and welfare, a fixed cattle handling system is designed to offer cattle a handling experience that is as stress free as possible.




# FIXED CATTLE HANDLING

## Any Hand Crowding Pen Shown with Fully Clad (Stockboard) Straight Race

Incorporated animal welfare and safety features:

- Cattle easily become distracted when moving through confined spaces, therefore our race panels are fully clad to a height of 1560mm to reduce distractions and aid flow
- The semi-circular forcing pen turns the cattle through 180 degrees which is driven by research suggesting cows have a tendency to return to the direction they came from
- Narrow personnel gaps provide the handler with access to the holding pens or egress in emergencies
- It is advised that the race exit points towards the cattle housing or field as cattle will move better when going in the direction of their housing environment
- The 4880mm x 3195mm holding pen areas are designed to only hold a small number of cattle at any one time because cattle behaviour experts indicate a small group of cattle will move much easier than a larger group

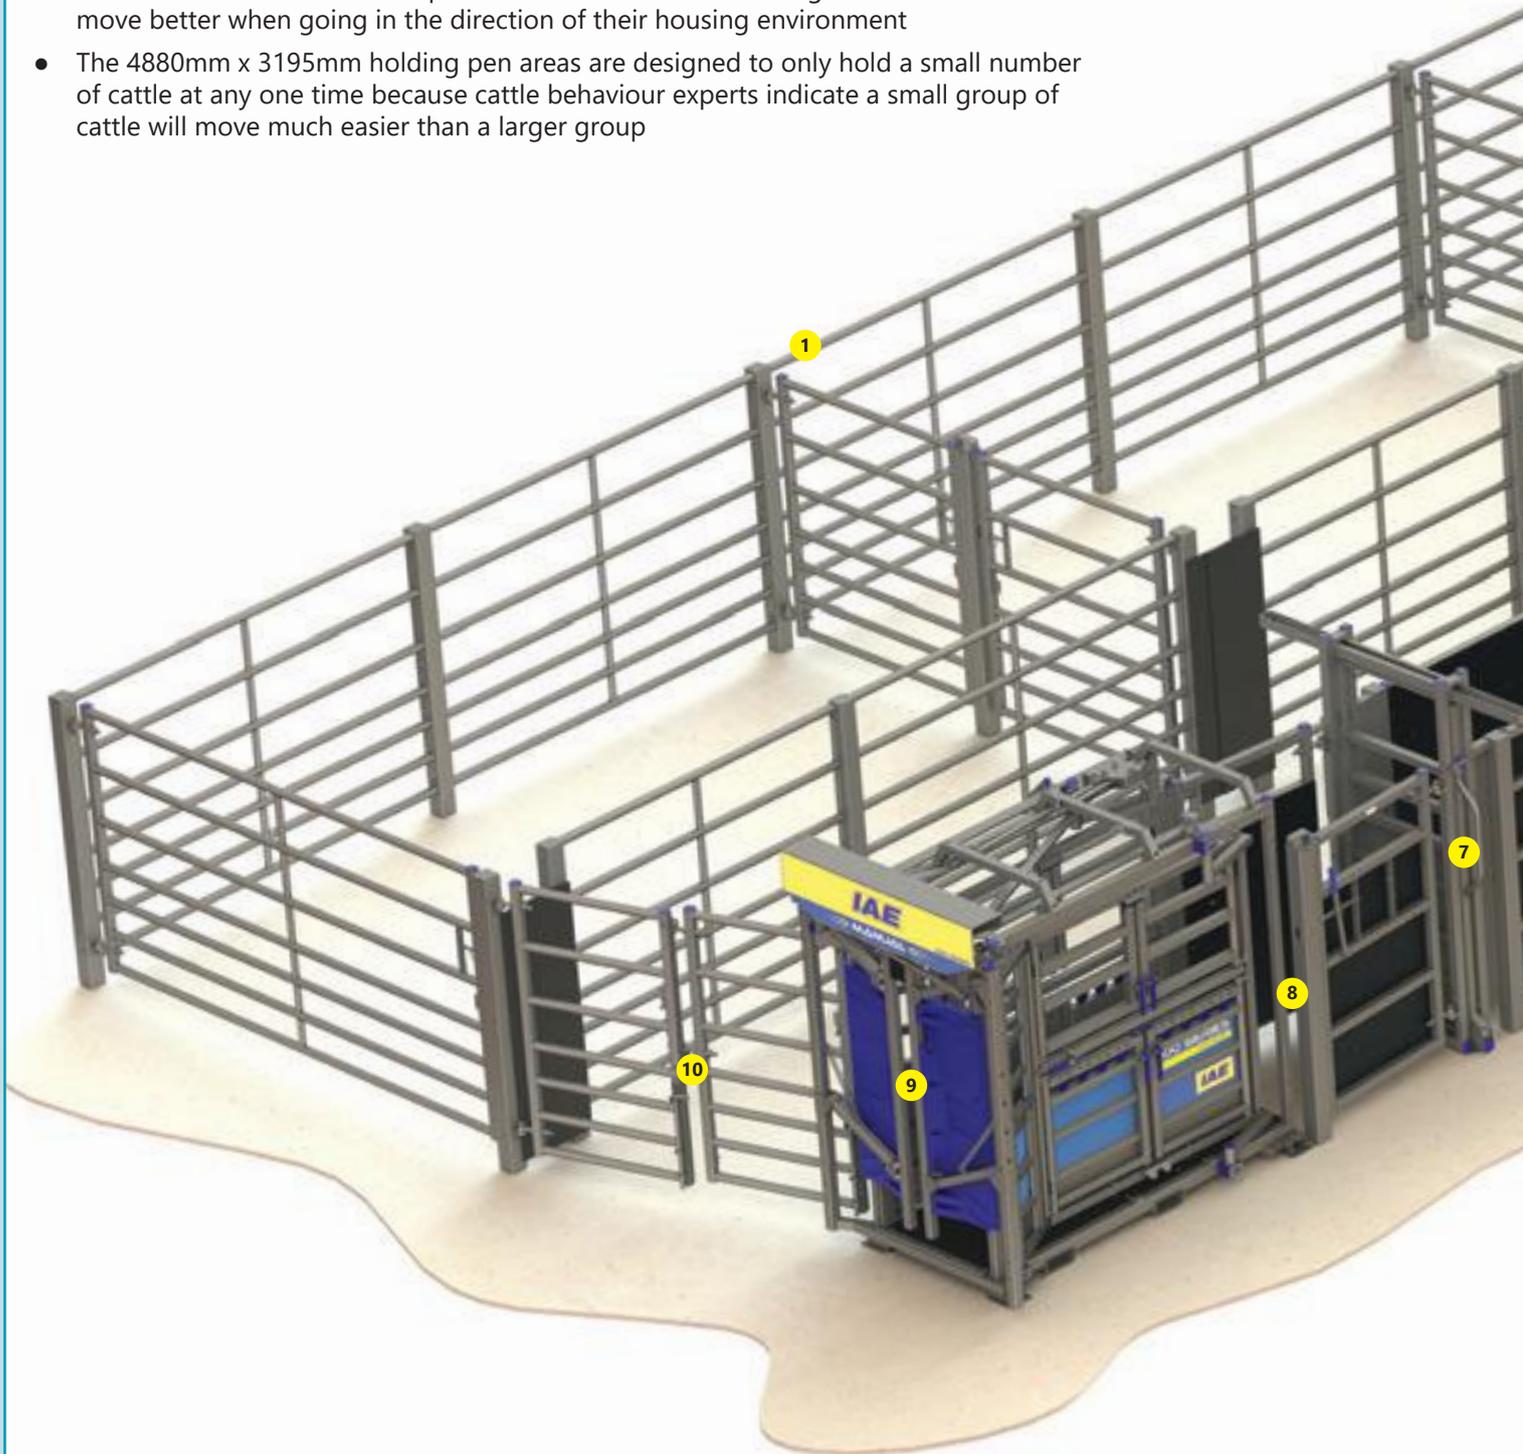

1. 1465mm high 7 Rail panels and gates hang at 1675mm high to form holding pens

2. Part clad forcing gate comes with ring hinges

3. 1560mm high fully clad crowding pen hangs at 1675mm high x 6210mm overall wide

4. Slide gate included in crowding pen section

5. 1560mm high fully clad straight race panels hang at 1675mm high


6. Diverter gate

7. Slide gate included in race section

8. Vet access gates

9. Cattle crush (not included)

10. Safe zone gate

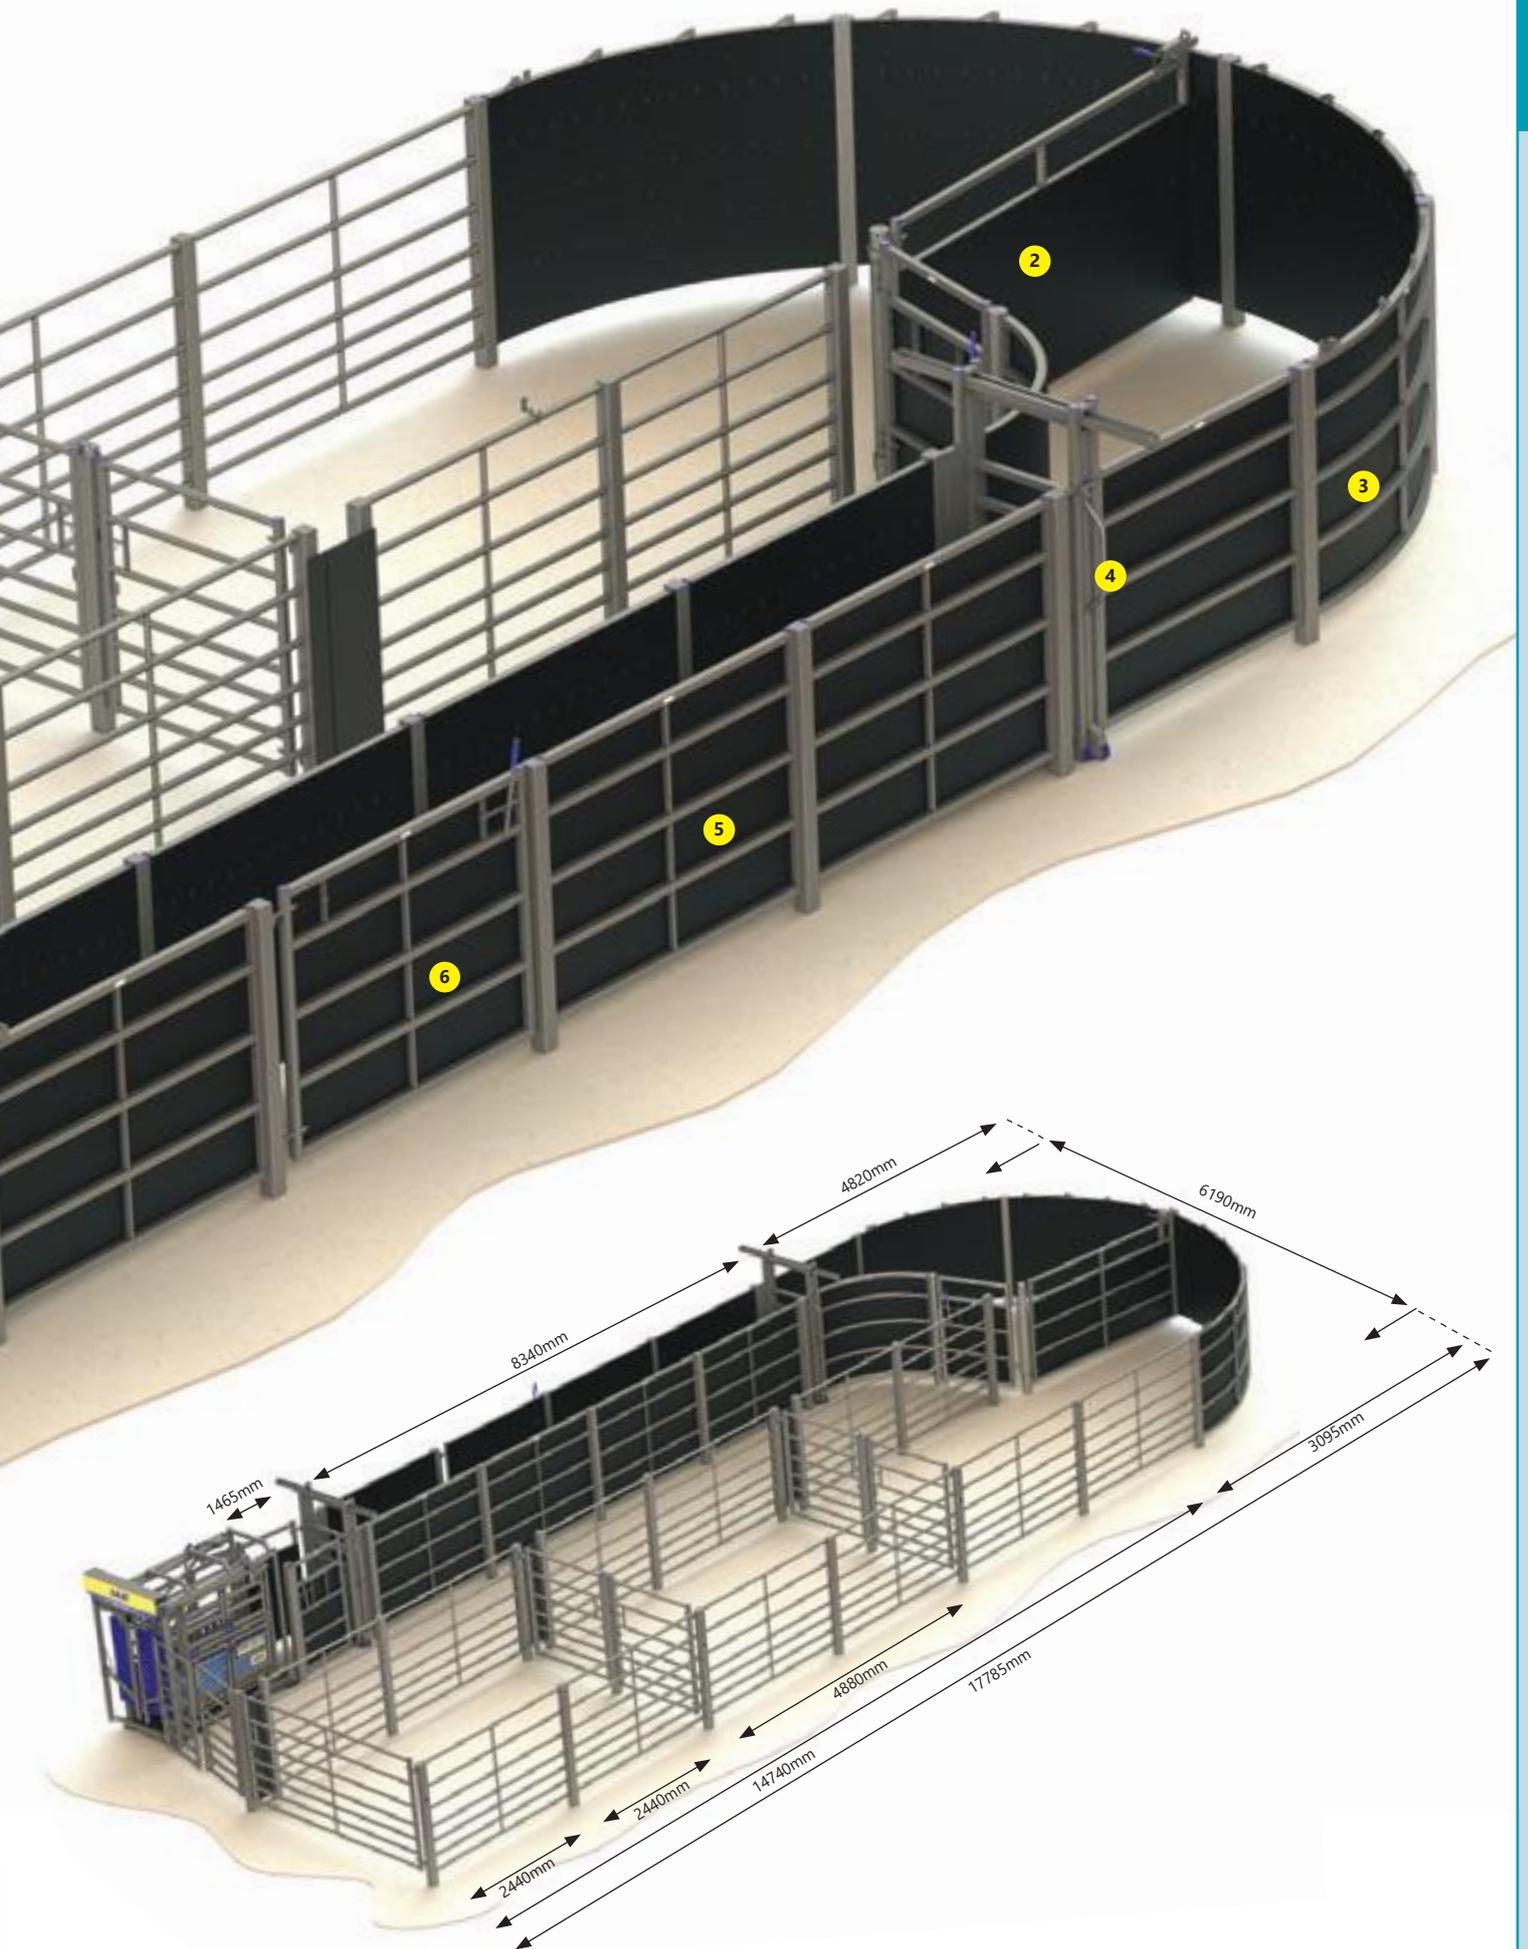

## Race Options

## Straight Race



- 8340mm long
- 740mm wide
- 1560mm high fully clad stockboard panels
- Includes one diverter gate
- Sliding gate included at the front of the race to control cattle flow


## Curved Race



- 8340mm long
- 740mm wide
- 1560mm high fully clad stockboard panels
- Panels are curved to aid cattle flow
- Includes one diverter gate
- Sliding gate included at the front of the race to control cattle flow




## Folding Cattle Race Step

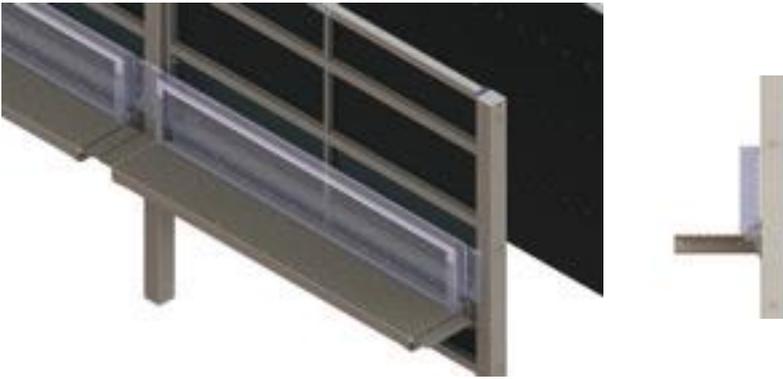

- For use on straight race systems only
- Cantilever design
- Punch-formed step surface to provide better grip for the operator
- Aids visibility of stock
- Makes treatment administration such as pour on treatments much easier
- Can be folded up when not required to aid space efficiency
- Race panels pre-drilled to accommodate for step (late 2022 models onwards)

## Half Dual Width Cattle Race

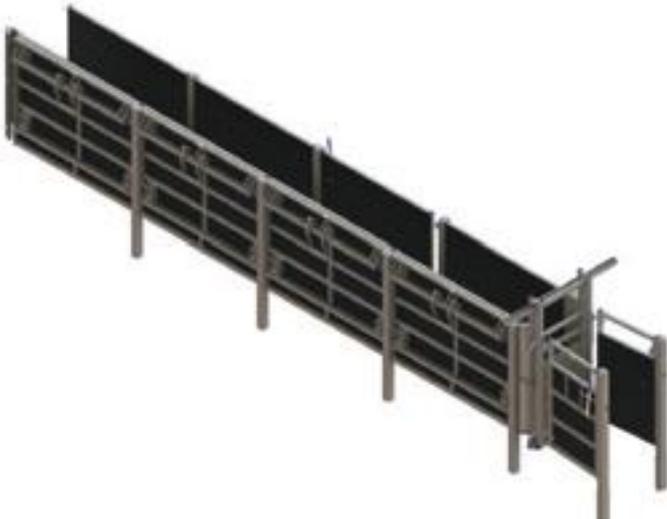


- Panels down one side of the race are adjustable
- Panels down the other side are standard
- When working with smaller stock, adjustable panels can be dropped in
- Creates a minimum width of 610mm
- Prevents young stock from turning inside the race
- When working with larger animals panels can be lifted out to create a maximum width of 740mm

## Full Dual Width Cattle Race



- Panels down both sides of the race are adjustable
- When working with smaller stock, adjustable panels can be dropped in
- Creates a minimum width of 480mm
- Prevents young stock from turning inside the race
- When working with larger animals panels can be lifted out to create a maximum width of 740mm
- If required just one side of panels can be dropped in to create a 610mm wide race

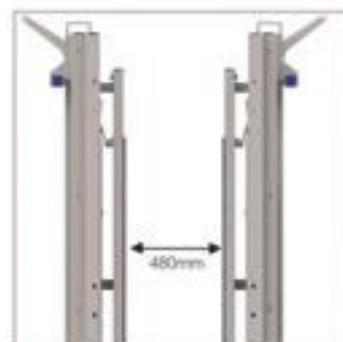



FL63D

**NEW PRODUCT**  
See Page 33



For ultimate flexibility you cannot improve upon our range of portable cattle handling equipment, suitable for field usage but can be used in a yard with the addition of some permanent fixtures.

All items are quick and easy to assemble and due to their modular nature you can make the system as large or small as your needs or space will allow.



## Portable Cattle Handling Starter Kit

- A basic set of hurdles, gates and frames which can be assembled in a variety of ways to suit your individual requirement
- Quick and easy to assemble
- Ideal for setting up in the field or on the farm yard


**NB:** May require some permanent fixtures if set up on concrete.

Qty	Product Description
10	3050mm 6 rail portable cattle hurdle
15	20mm diameter coupling bar 1400mm Long
1	840mm wide race arch
1	840mm wide race arch c/w gate
1	1575mm wide race arch c/w gate

**Code** F040 2025 01




## Standard 6 Rail Hurdle

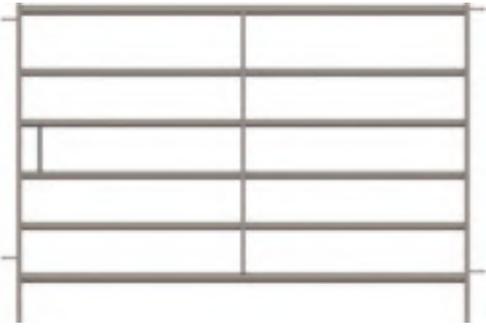

- Improved hurdle strength featuring 40mm x 20mm RHS bracing
- 1525mm high
- 1830mm high x 7 rail units also available (made to order)
- The position of the top drilled lugs prevent potential leg traps on all 6 rail units
- Cattle hurdles are now supplied with box section vertical infills for additional strength

Code	Length (mm)	Height (mm)
F040 2002 08	2440	1525
F040 2002 10	3050	1525


## 6 Rail Hurdle with Diverter Gate

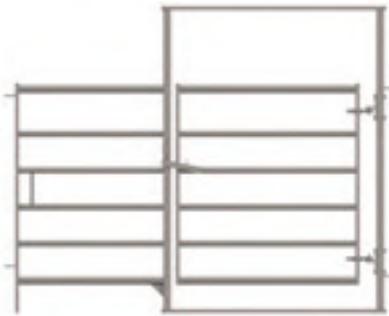

- Diverts stock out of race
- Locks in divert position if required

Code	Length (mm)	Height (mm)
F040 2004 10	3050	1525


## 6 Rail Gate Built into Hurdle Frame

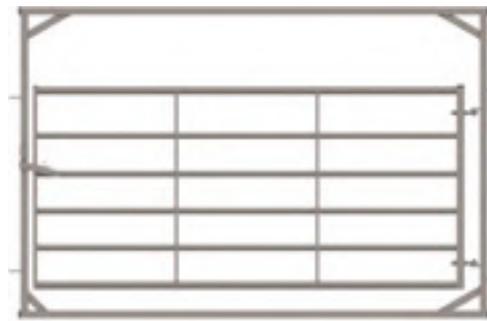

- Gate hangs at 1525mm high inside a 2050mm high frame
- Comes complete with fixing lugs and hinge hook

Code	Length (mm)	Height (mm)
F040 2007 08	2440	1525
F040 2007 10	3050	1525

## 6 Rail Hurdle with Access Gate

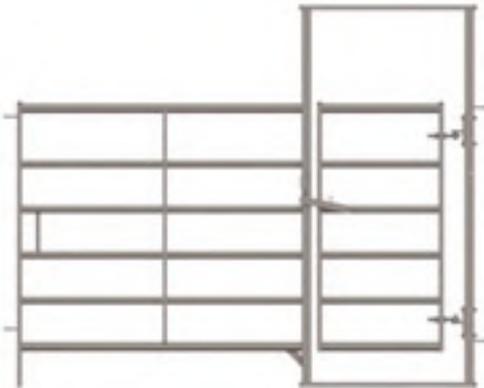

- Enables personnel access into/through the race
- Locks off at 90° across race width when used in conjunction with F040 2014 02 drop over bolt latch receiver

Code	Length (mm)	Height (mm)
F040 2005 10	3050	1525



## Race Joining Arch with Gate



- Used in portable systems where posts are not practical
- Prevents hurdles from splaying when forming part of the race
- Standard frames come complete with drilled lugs each side to connect to hurdles
- Gate units have drop over bolt latches fitted
- Gate units are complete with two pairs of drilled lugs and one pair of hinge hooks
- Some fittings will be provided loose to bolt on

Code	Width (mm)	Height (mm)
F040 2006 02	840	2050
F040 2007 02	1575	2050

## Race Joining Arch



- Used in portable systems where posts are not practical
- Prevents hurdles from splaying when forming part of the race
- Standard frames come complete with drilled lugs each side to connect to hurdles
- Some fittings will be provided loose to bolt on

Code	Width (mm)	Height (mm)
F040 2006 01	840	2050
F040 2007 01	1575	2050

## Support Posts



- To be used when connecting hurdles in semi permanent situations
- Standard posts come complete with a pair of slotted lugs welded on at 180° to each other. Other options available
- 100mm x 100mm x 1980mm long SHS

Code
F040 2020 08

## Lugs on Plate



- To be used to connect hurdles to existing walls etc
- Two slotted lugs welded onto a 1280mm long continuous drilled plate

Code
F016 0012 23

## Coupling Rod - to suit hurdles



- Rod with 90° bend connects all hurdles to each other and to joining frames etc
- Position of top lugs on hurdle enables coupling rod to eliminate potential leg trap between vertical end stiles of hurdles

Code
F040 2015 01




## Adjustable Race Joining Arch



- Designed to work seamlessly with our portable hurdles to create a safe, efficient, and adaptable cattle race system.
- Built with strength and practicality in mind, this arch ensures smoother livestock flow while giving you the flexibility to adjust handling conditions.
- Versatile Fit to suit cattle of all sizes and breeds with a minimum width of 537mm and maximum width of 760mm
- Quick lifting and lowering mechanism makes installation and adjustments simple, even in busy working conditions
- Prevents animals from turning inside the race, encouraging calm, forward movement.

Code	Width (mm)	Height (mm)
1007367	1230	2088

## Sliding Gate in Race Joining Arch

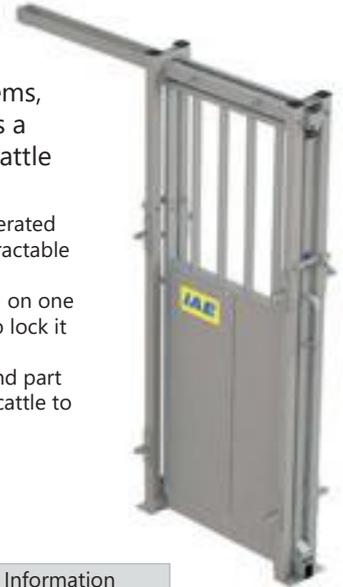

For use within race systems, the sliding gate provides a part sheeted barrier to cattle

- The sliding gate can be operated from either side due to retractable sliding gear
- Flip over catch can be used on one or both sides of the gate to lock it in position
- The door is part sheeted and part vertical railed to allow the cattle to see down the race

Code	Product Information
F040 2008 04	Bolt to Crush
F040 2008 01	Standard

## Cattle Stop Gate in Frame



Showing gate closed



Showing gate open

- 500mm long x 935mm wide x 1950mm high
- Acts as a non return gate when closed, stopping the next animal in the race
- Gate is locked when in the closed position
- Operating wheels both sides
- Can be rope operated remotely
- Comes complete with fixing lugs each side
- Coupling rods are not included

Code
F040 2016 02

## Backing Up Bar Assembly



- Traditional ratchet style backing up bar facility clamps onto cattle hurdles
- Comes complete with backing up bar

Code
F040 2014 01

## Cattle Lugs - on vertical plates



- To be used when needing to connect hurdles to existing posts etc
- Drilled lugs are priced per pair

Code
F040 2015 08



## RoteX®

The RoteX® Mobile Cattle Handling System is a quick, easy and extremely convenient way of handling cattle both in the field or on the farmyard. The RoteX has been designed with the latest ideas and theories of animal welfare and handling in mind, which is why the design features a semi-circular crowding pen.

Additional design features, such as fully clad (stockboard) outer radius hurdles and part-clad inner panels have been incorporated into the system to prevent cattle from looking beyond the system, whilst also maximising the handler's visibility of all the animals held within the system.

To ensure maximum safety whilst transporting the RoteX system, it is supplied in its own bespoke transport crate, which is complete with 3-point linkage points and pallet forklifting points for ease of manoeuvring.





1. Gates and hurdles in race section have open top space for increased animal visibility
2. Radiused hurdles are any hand, to allow the system to be set up to flow cattle in the opposite direction
3. Mesh viewing gap
4. Unique continuous central locking ratchet plates allow continuous forcing around the system with no interruptions at panel joins, yet still retain the non-return safety feature
5. Full clad (Stockboard) outer radius hurdles
6. 5000mm nominal diameter forcing ring
7. The Rotex system can be set up either left-hand or right-hand depending upon application
8. Supplied in its own bespoke crate ready to erect in sequence



Qty	Product Description
1	Forcing Gate with special lever operated bolt with noise reduction buffer and mesh viewing gap
3	Radius Panels with central locking ratchet plates
1	Frame with exit gate
3	Support Arches
1	Race Arch
2	2125mm Hurdles with viewing gaps
13	Coupling Rods
1	Purpose Built Crate for easy storage and handling also with 3 point linkage and pallet fork lifting points

Code F041 2000 03



## Saracen Yoke Gate in Frame



Self closing yoke design activated by the animal's forward movement.

- Release handles fitted to both sides
- If an animal shuts the yoke having not put its head through, reset handles allow yoke to be reset without needing to let the animal exit the crush
- Operator handle assists animal exit if required
- Fully sheeted baffle plates to eliminate leg trapping
- Adjustable width yoke with 7 settings between 100mm and 250mm
- Vertical yoke arms to reduce the risk of choking if the animal collapses
- Lugs and short coupling rods included to fix to portable cattle hurdles etc
- Compatible with Superscoop® (See p.15)

Code
F040 2001 01



## Chieftain Yoke Gate in Frame



Manually operated scissor yoke with fully retractable yoke arms. Lever operating handle lifts the yoke upwards after the animals head has gone past.

- Fully opening front and side gates form the front cage enabling greater access around the head
- Fitted with adjustable anti-jump bar to reduce the chance of animals lifting their legs over the individual yoke arms
- Simple quiet winding adjustment gives infinite yoke widths between 100mm and 290mm
- Vertical yoke arms to reduce the risk of choking if the animal collapses
- Lugs and short coupling rods included to fix to portable cattle hurdles etc
- Compatible with Superscoop® (See p.15)

Code
F040 2001 12






## Deluxe Calving Hurdle

The Deluxe Calving Hurdle is an essential item to any farmer during the calving season. The hurdle enables the pregnant animal to be isolated and safely restrained so that you can aid the birthing process in a controlled, calm and safe manner.

The addition of removable rails built into the restraining gate allows caesarean sections to be performed easily. Simply remove the rails to provide you and the vet with the space you need to safely remove the calf. Due to caesarean sections only being able to be performed on one side of the cow, the hurdle is set to be one hand only.

The calving hurdle is fronted by a unique yoke which is positioned differently to that of a standard feeding yoke. Due to the higher risk of animals going to ground during birth, the yoke is designed to allow for this and will therefore allow for the cow to go to ground without choking.

- 5 rail gate with 3 removable rails
- The 3 removable rails either allow for a caesarean section to be performed or for the calf to suckle from its mother
- Cow can be yoked to assist with the calving
- The yoke is easily operated via a rope which extends to the back of the hurdle. This makes isolating the cow in the calving hurdle a one-person job.
- 3050mm long
- Low safe exit from yoke in case of the animal going to the ground
- Set at 90° from another fence line to create a temporary calving area

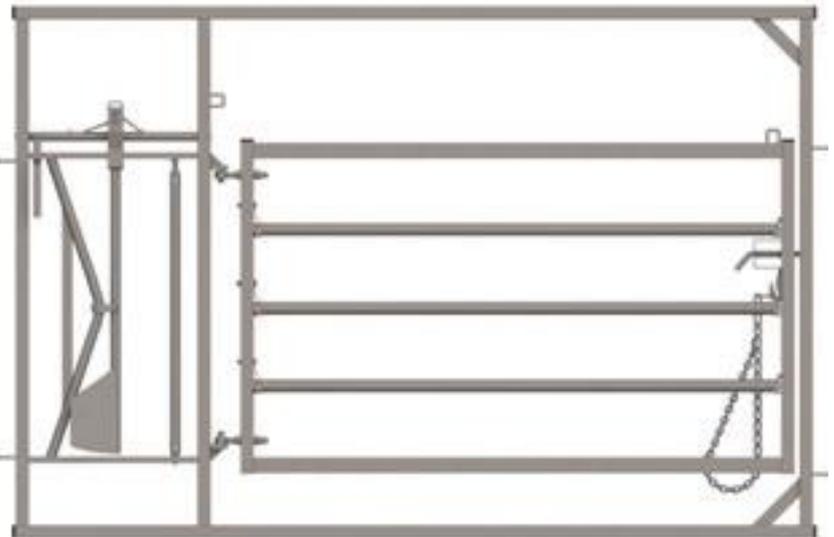


Code

F040 2013 20






This equipment is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that food safe or non-toxic epoxy is applied to areas of the product which will be in contact with silage, feed or water before use, and then periodically thereafter when it is empty, clean and dry in order to prevent corrosion of the steel and zinc and therefore extend the life of the equipment. See p.130 for further information.

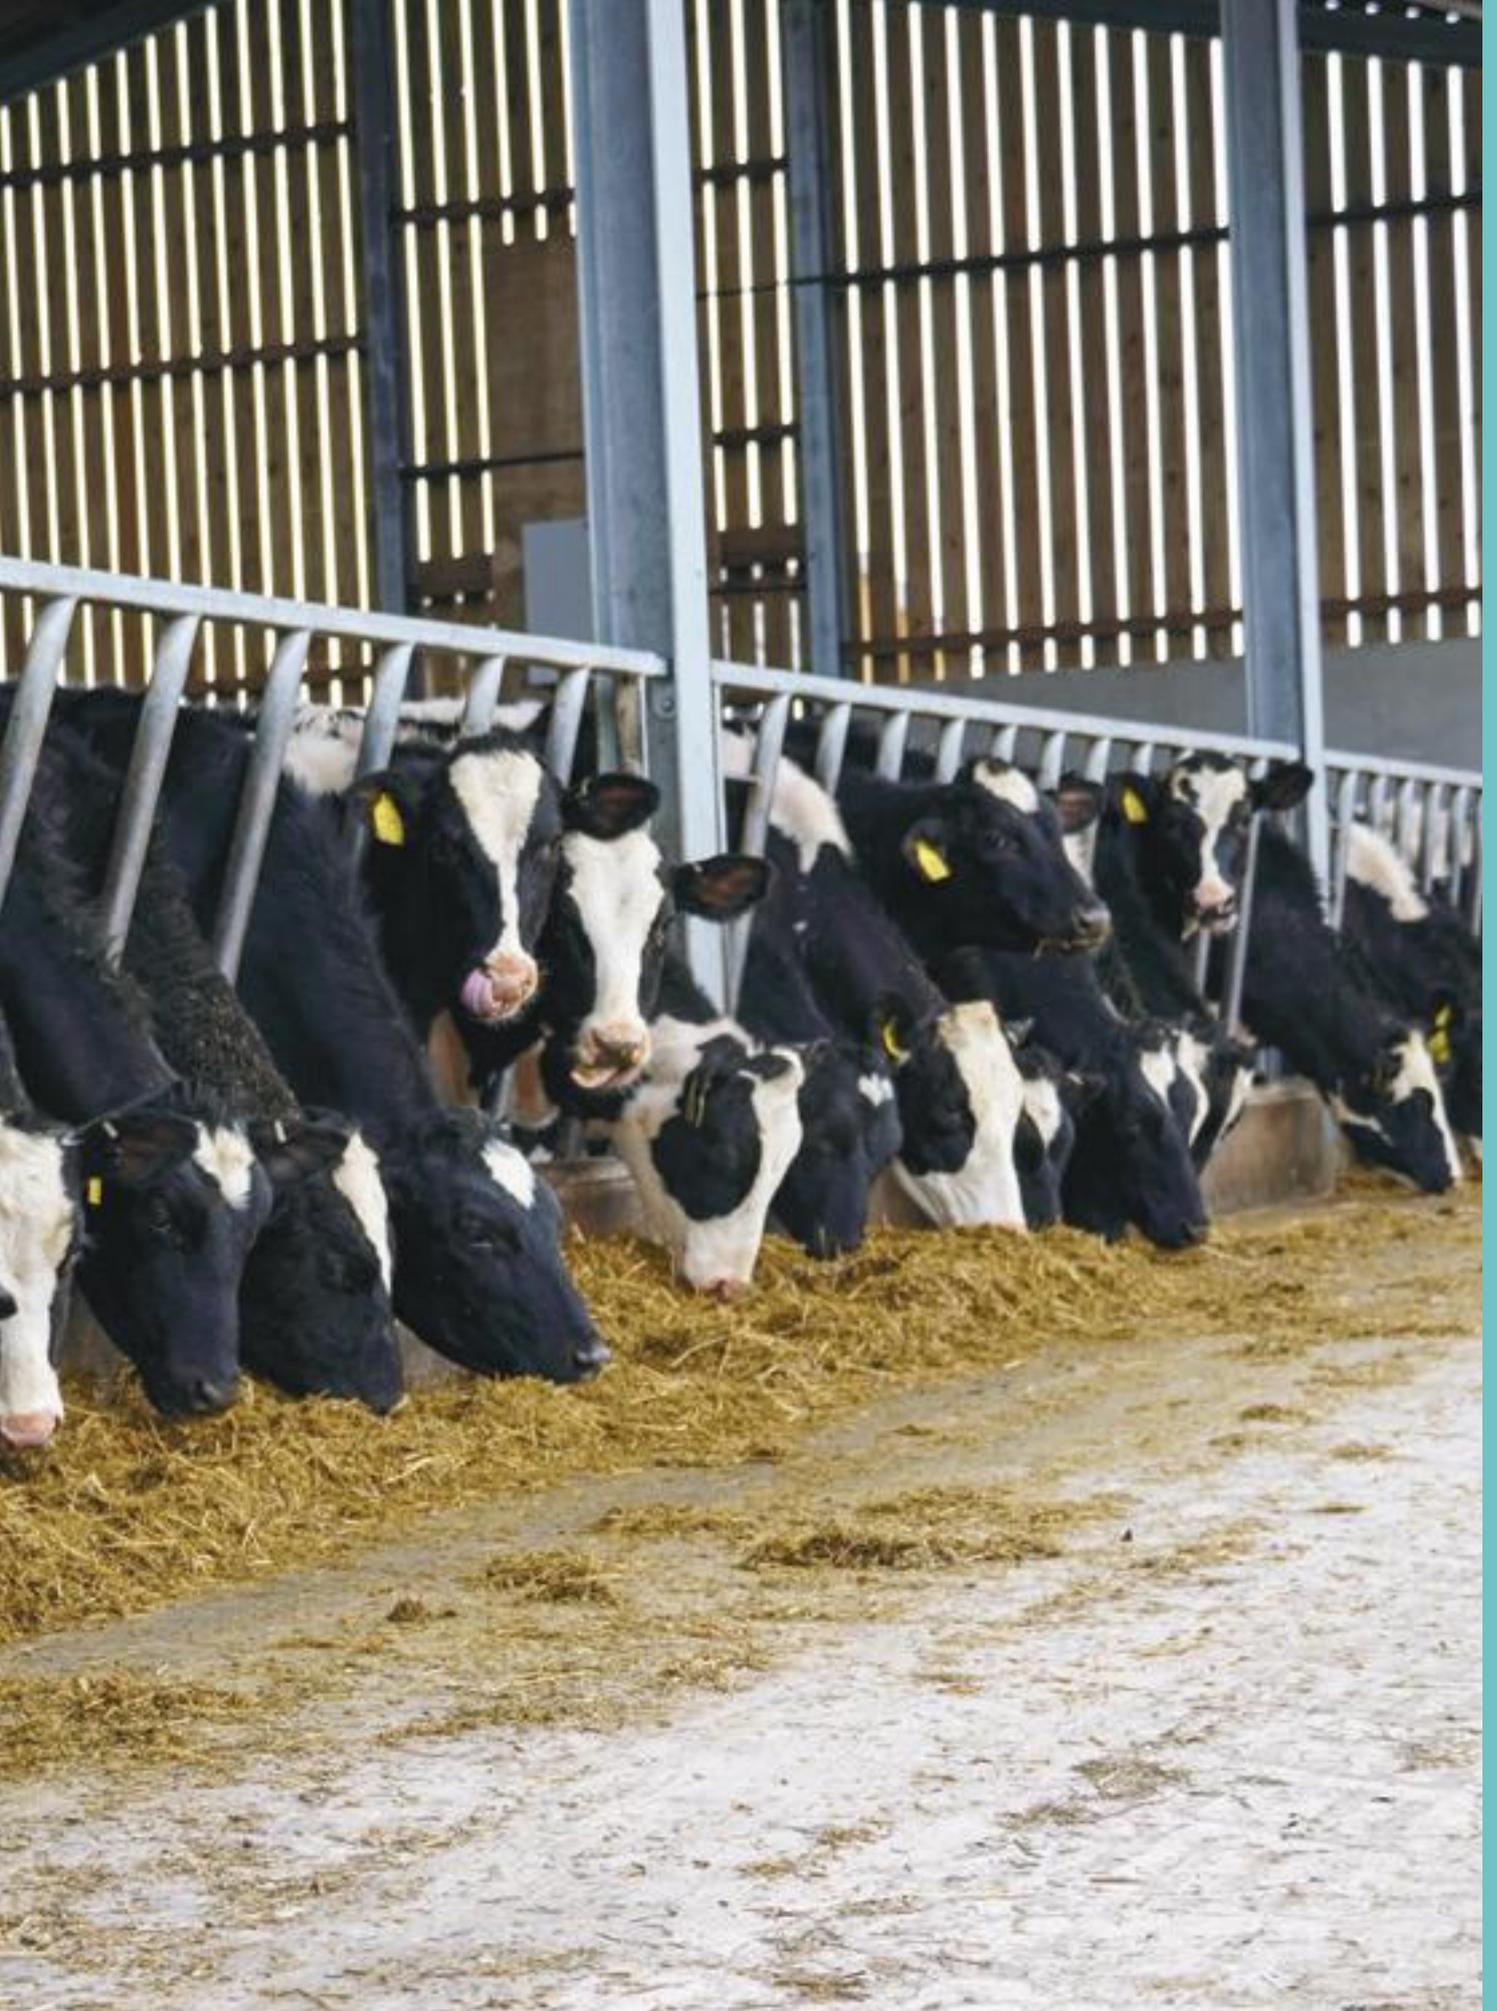


We offer a comprehensive range of standard and bespoke feed barriers to suit all of your livestock feeding requirements. Selecting the correct feed barrier for the type of animal you are housing is imperative for helping to prevent head trapping and neck rubs whilst ensuring the animals can feed freely and naturally without any need to strain.




### Diagonal Feed Fence 915mm high - no base

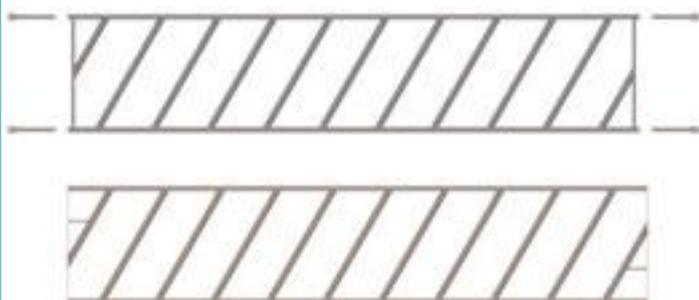

Code	Length (mm)	Flat Brackets	Angle Brackets	Flat Plate	Flat Bracket
F030 2010 01	2968 <sup>1</sup>			✓	
F030 2010 06	4420 <sup>2</sup>	✓			
F030 2010 04	4420 <sup>2</sup>		✓		
F030 2003 12	4482 <sup>3</sup>			✓	
F030 2010 17	5850 <sup>4</sup>	✓			
F030 2010 18	5850 <sup>4</sup>		✓		

Adjustable brackets enable panels to fix between or on the face of various stanchions & posts

### Diagonal Feed Fence Gate Unit 1335mm high - timber base

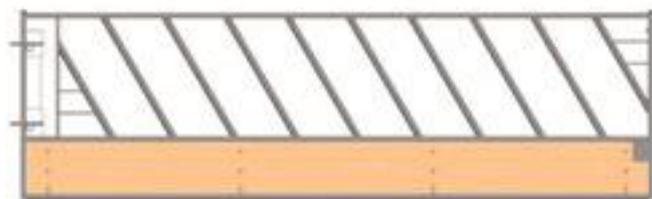


- Single acting gate units with timber base complete with two built in keyhole sliding bolts for added safety
- Units have 25mm sleeved hinge eyes
- Supplied with 410mm timber base
- Various fittings available depending on application

Code	Length (mm)
F030 2010 11	4450 <sup>2</sup> Single acting

1. Creates 3050mm centres with 80mm x 80mm posts
2. To suit nominal 4570mm bays
3. Creates nominal 4570mm centres when used with 90mm x 90mm posts
4. To suit nominal 6000/6100mm bays (may not be suitable in all situations please call the sales office for further information)

### Diagonal Feed Fence 1370mm high - timber base

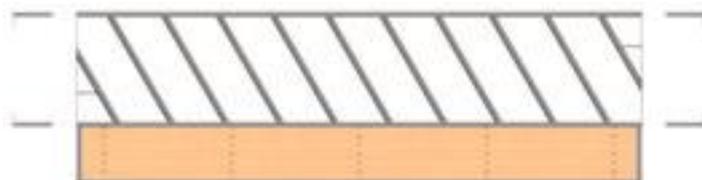

Code	Length (mm)	Flat Brackets	Angle Brackets	Flat Plate	Flat Bracket
F030 2010 07	4420 <sup>2</sup>	✓			
F030 2010 05	4420 <sup>2</sup>		✓		
F030 2010 09	4482 <sup>3</sup>			✓	
F030 2010 15	5850 <sup>4</sup>	✓			
F030 2010 16	5850 <sup>4</sup>		✓		

Adjustable brackets enable panels to fix between or on the face of various stanchions & posts

### Posts to Suit Feed Barriers

Code	Product Information
F030 2012 01	80 x 80 RHS to suit 3660mm panels
F030 2012 02	90 x 90 RHS to suit 4570mm panels
F030 2012 03	100 x 100 RHS to suit 6100mm panels

### Feed Barrier Specification

- 60mm x 40mm RHS horizontal rails up to and including 4880mm long
- 80mm x 40mm RHS horizontal rails over 4880mm long (where deemed appropriate)
- 48.3mm dia tube diagonal rails at 432mm approx centres reduces bullying



**NB:** All types of feed fence can be supplied as double acting gate units (where coupling rods are used and the gate can be opened from either end)



## Single Rail Feed Barrier, Post & Fittings

Code	Product Information
<b>Rails</b>	
A356 0332 61	6100mm length of 60.3mm dia tube
A357 6140 61	6100mm length of 76.1mm dia tube
<b>Posts</b>	
F030 2024 21	100 x 100 SHS 2000mm long single rail feed fence post plain
F030 2024 48	100 x 100 SHS 2000mm long single rail feed fence post drilled
<b>Brackets</b>	
F030 2024 41	Single rail feed fence post bracket to suit 60mm dia rails
F030 2024 42	Single rail feed fence post bracket to suit 76mm dia rails
<b>Channels</b>	
F030 2024 53	400mm long 80mm internal bolt on channels - 75mm timber boards
F030 2024 51	400mm long 85mm internal bolt on channels - 80mm concrete panels
F030 2024 52	400mm long 105mm internal bolt on channels - 100mm concrete panels

- Low cost alternative to other feed fence options
- May need some self assembly
- 60.3/76.1mm dia tube rails 6100mm long as standard to suit 3050/4575mm posts/RSJ centres
- Can fix to existing steelwork or supplied with support posts
- Other fittings available



## Tombstone Feed Fence 745mm High

### No Base

Code	Length (mm)	Cow Spaces
F030 2240 01	672	1
F030 2240 02	1333	2
F030 2240 03	1993	3
F030 2240 04	2654	4
F030 2240 05	3314	5
F030 2240 06	3974	6
F030 2240 07	4635	7

### With Base

Code	Length (mm)	Cow Spaces
F030 2240 11	672	1
F030 2240 12	1333	2
F030 2240 13	1993	3
F030 2240 14	2654	4
F030 2240 15	3314	5
F030 2240 16	3974	6
F030 2240 17	4635	7

- Designed specifically for horned animals to reduce the risk of trapped heads
- 745mm high unit sits above a 460mm base unit at 660mm centres giving 203mm clear gaps
- Available with and without timber base or as a gate unit
- Bespoke sizes available

## Tombstone Feed Fence Support Posts

Code	Posts (mm)	Product Information
F030 2012 40	80 x 80 RHS	1670mm long to suit panels up to 3360mm
F030 2012 41	90 x 90 RHS	1670mm long to suit panels up to 4635mm




## 2 In 1 Cattle Feed Fence Gate Units c/w Hinge Eyes At Each End - Double Acting


- Heavy duty diagonal feed fence c/w 4 x 25mm sleeved hinge eyes and 2 x coupling bars
- Supplied with 2mm thick detachable steel feed troughs which are available in 3 sizes
- Offers flexibility in that the gate can be opened from either end providing easy access to the pen
- Fixed 2 in 1 units and single acting gate type units are available upon request




Code	Length (mm)	Width (mm)	Depth (mm)
F030 2110 15	4575 stanchion centres	457	216
F030 2110 20	6100 stanchion centres	457	216



Code	Length (mm)	Width (mm)	Depth (mm)
F030 2112 15	4575 stanchion centres	610	255
F030 2112 20	6100 stanchion centres	610	255



Code	Length (mm)	Width (mm)	Depth (mm)
F030 2114 15	4575 stanchion centres	760	355
F030 2114 20	6100 stanchion centres	760	355



- **NB:** Units over 4880mm long will have troughs fabricated in two sections which may be of unequal length
- **NB:** All 2 in 1 double acting gate units are approximately 305mm shorter in length than the stanchion centre to centre dimension

### Vertical Plate Stanchion Fittings

Code	Product Information
F016 0020 25	25mm hinge eye on vertical drilled plate
F016 3120 40	Pack of 4 M12 x 40mm bolts and nuts

### Angle Bracket Stanchion Fittings


Code	Product Information
F030 2013 20	To suit 100mm stanchion
F030 2013 21	To suit 135mm stanchion
F030 2103 22	To suit 145mm stanchion
F030 2013 23	To suit 150mm stanchion



# Yokemaster®

Designed for dairy cattle, the YokeMaster® self-locking yoke panel allows for cows to feed freely as they would at a standard feed barrier but it also allows for the animals to be locked into the panel through the use of a simple operating handle. Being able to lock the animals into the self-locking yoke panels permits standard veterinary and welfare procedures, such as artificial insemination (AI) and pregnancy diagnosis (PD), to be conducted within the familiar habitat of the cow. Consequently this leads to reduced stress and increased yields amongst the herd.


## Key Features Include

- **Unique patented locking arrangement**  
Features quiet, self lubricating, steel core polymer drop latch for added strength and quieter operation
- **Operate up to 50 headspaces with one handle**  
This easily exceeds what is realistic with competitor panels
- **Reliable locking - will not skip over lock**  
Once locked, the YokeMaster® will not jump or slip out of its locked state
- **Offset yoke arm pivot**  
The offset pivot of the YokeMaster® completely eliminates pivot point neck rub
- **1000mm high panel**  
Increased from 915mm high. This reduces rubbing and abrasions on the neck. Panels are available with up to 10 spaces. You can use a single panel in a 6000mm bay
- **Operating rod**  
Unique threaded adjustment/link system to enable multi-panel set-up

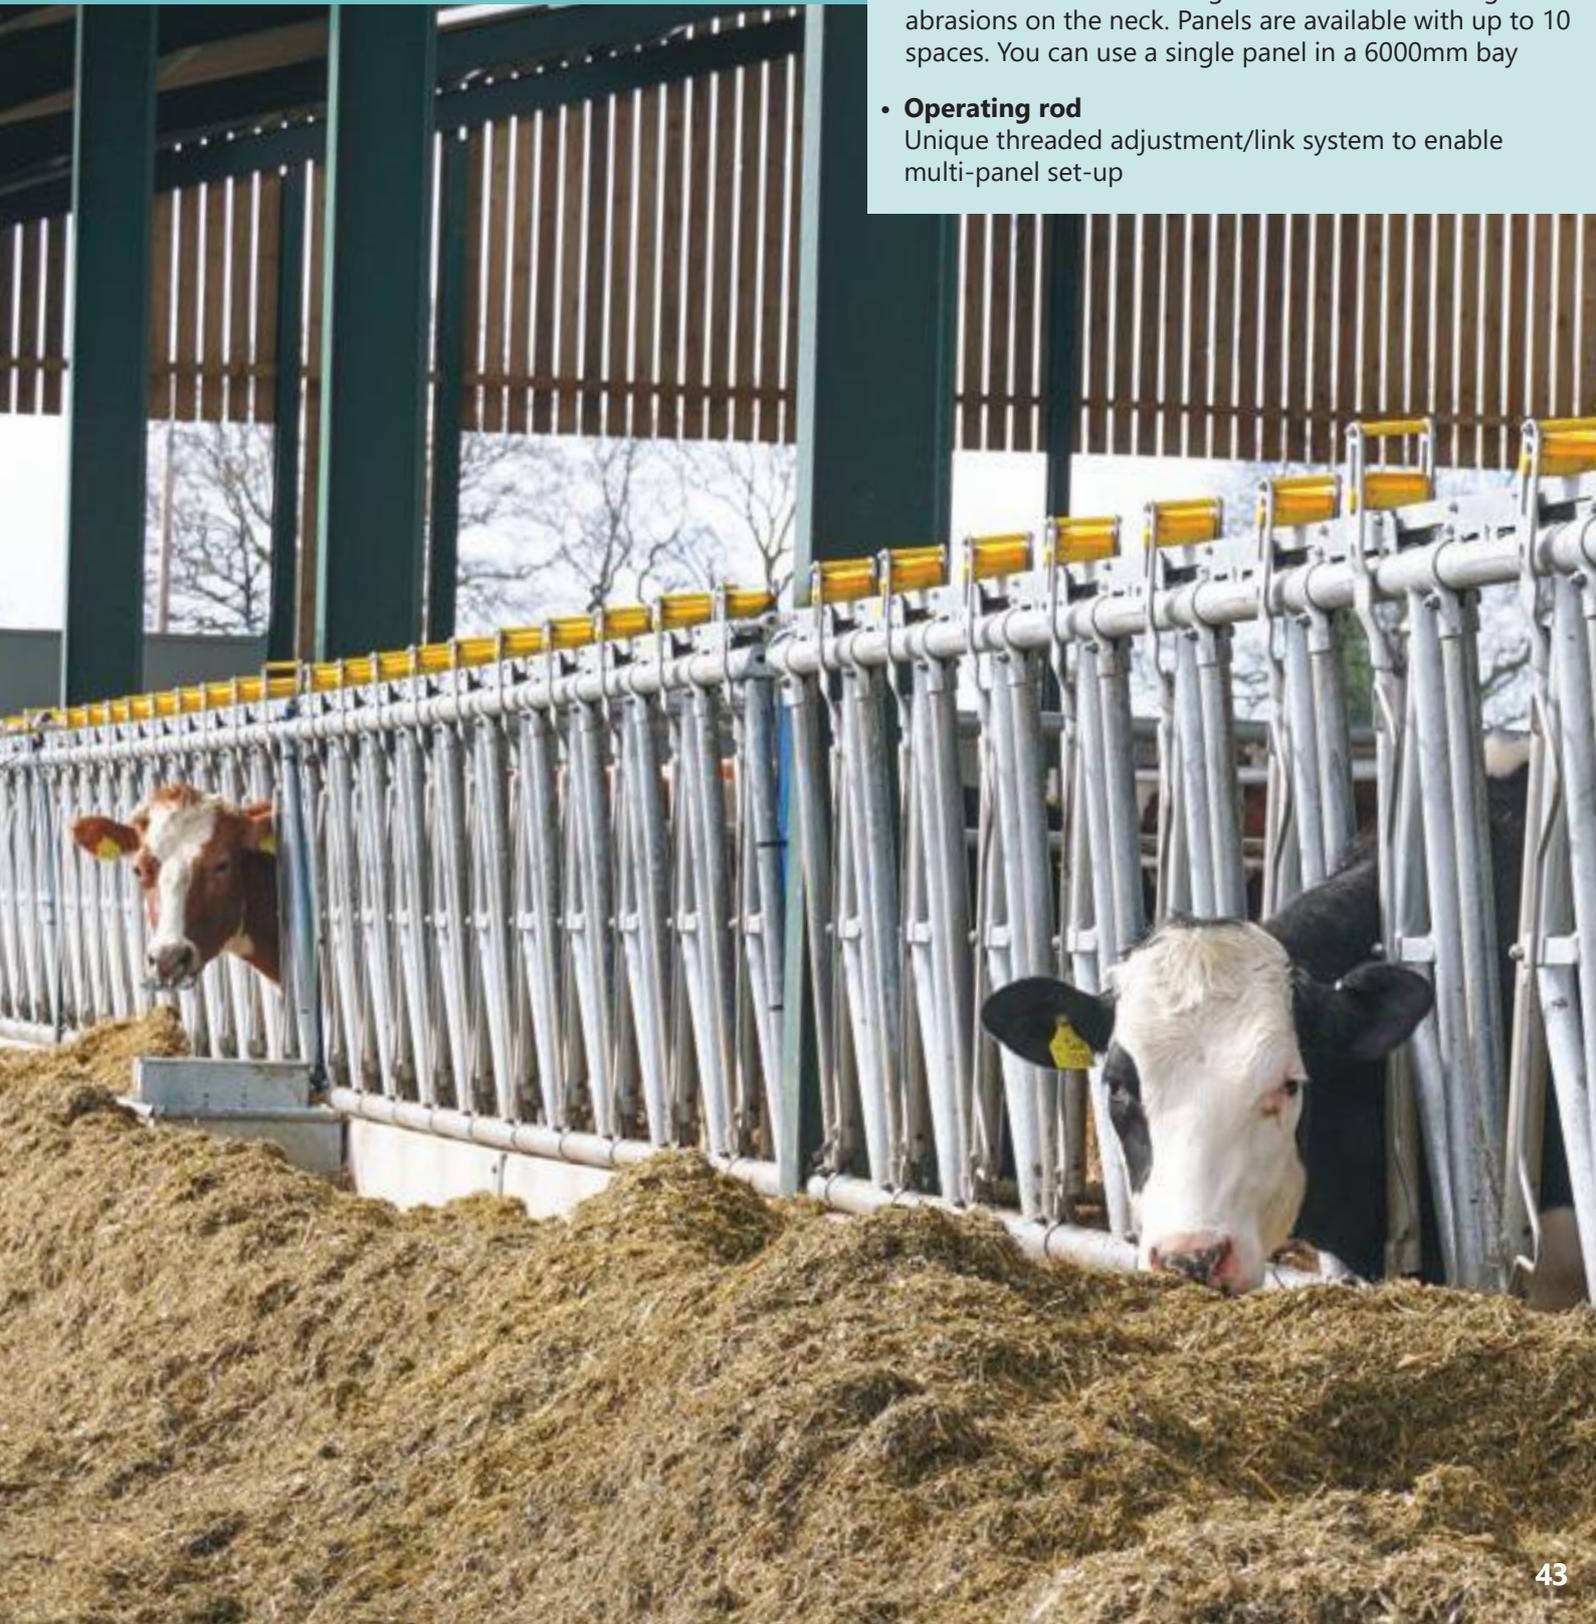

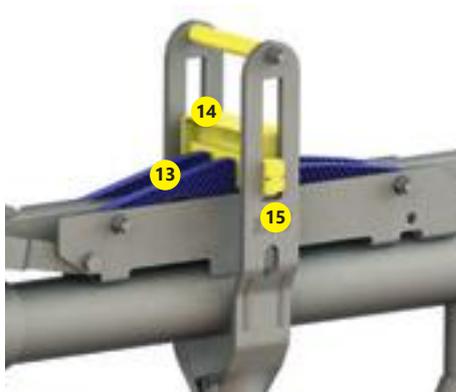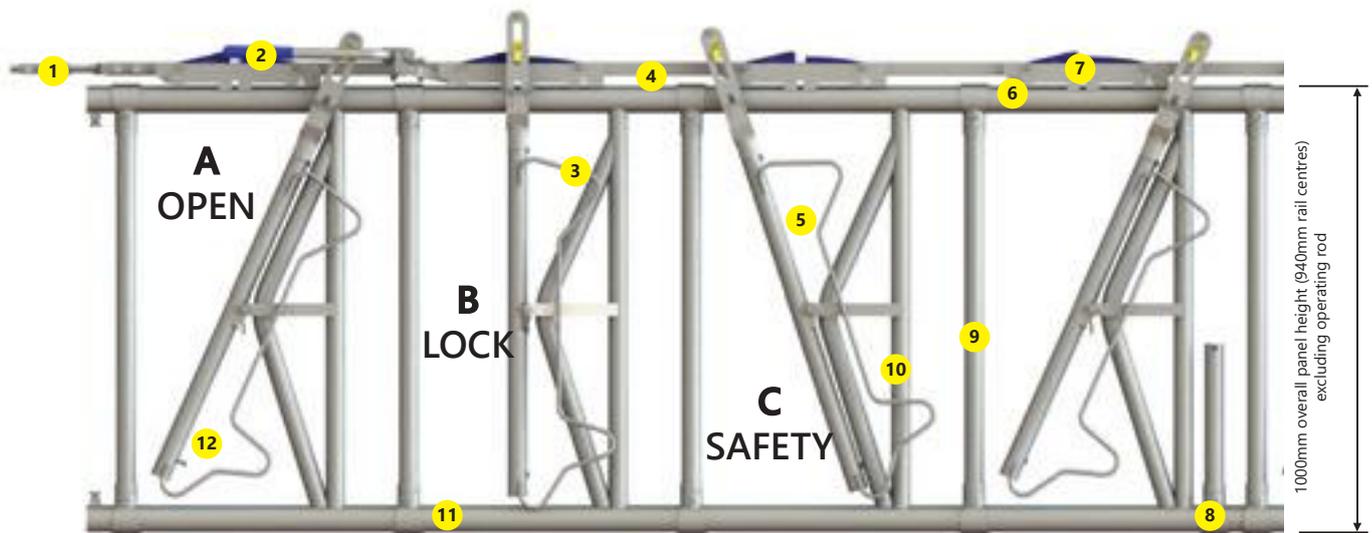


- Polymer drop latch reduces noise
- Steel core adds weight for more reliable locking and strength
- Inaccessible to animals. Allows for individual animal release

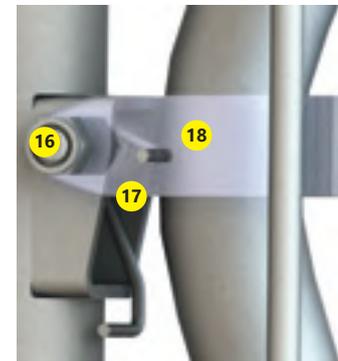

- |  |  |  |  |
|--|--|--|--|
| <p><b>1.</b> Threaded operating rod linkage allows highly accurate alignment of adjacent yoke panel operating rods</p> <p><b>2.</b> Operating handle lies horizontally. Moving through 180° it offers Exceptional Leverage allowing 50 animal headspaces to be operated (linked panels)</p> <p><b>3.</b> Rubber bump stops on yoke arm (top and bottom) for reduced noise</p> <p><b>4.</b> Unique sliding 40mm x 20mm operating rod</p> <p><b>5.</b> Heifer head trap prevention</p> | <p><b>6.</b> Easy access for cleaning and maintenance</p> <p><b>7.</b> Clean/obstruction free top rail design minimises ear tag loss</p> <p><b>8.</b> 4420mm and 5850mm long panels supplied with fixing post to be cast into stub wall. It is imperative this is used to support the centre of the panel. If alternative wall used (pre-cast concrete panel or similar), an alternative fixing <b>MUST</b> be made. Support directly from timber boards is insufficient</p> | <p><b>9.</b> 42.4mm adjustable head-gap rail 230-140mm (200mm standard)</p> <p><b>10.</b> 42.4mm dia vertical rails &amp; yoke arm</p> <p><b>11.</b> 60.3mm dia horizontal rails</p> <p><b>12.</b> Calf head-trap prevention</p> <p><b>13.</b> Locking Mechanism featuring polymer latches for self lubrication, reduced friction and noise</p> <p><b>14.</b> Quiet and smooth operating polymer drop latch features steel core for strength and weight to aid locking</p> | <p><b>15.</b> Pressed steel yoke arm fork</p> <p><b>16.</b> Unique Offset Yoke Arm Pivot point for greater animal welfare means no neck rub on pivot bolt</p> <p><b>17.</b> Axially mounted torsion spring for long life. Automatically returns yoke arm to open position</p> <p><b>18.</b> Dual pivot mounting plates</p> |
|--|--|--|--|



- Operation handle moves through 180° and lies parallel to top tube when at rest - inaccessible to animals, no lock required
- Long handle gives excellent leverage - 50 plus headspaces (on linked panels) can be operated with a single handle. Handle not supplied with panel and is purchased separately
- 1 space panel requires different handle (90° movement to avoid clash with stanchion) - F030 2250 17

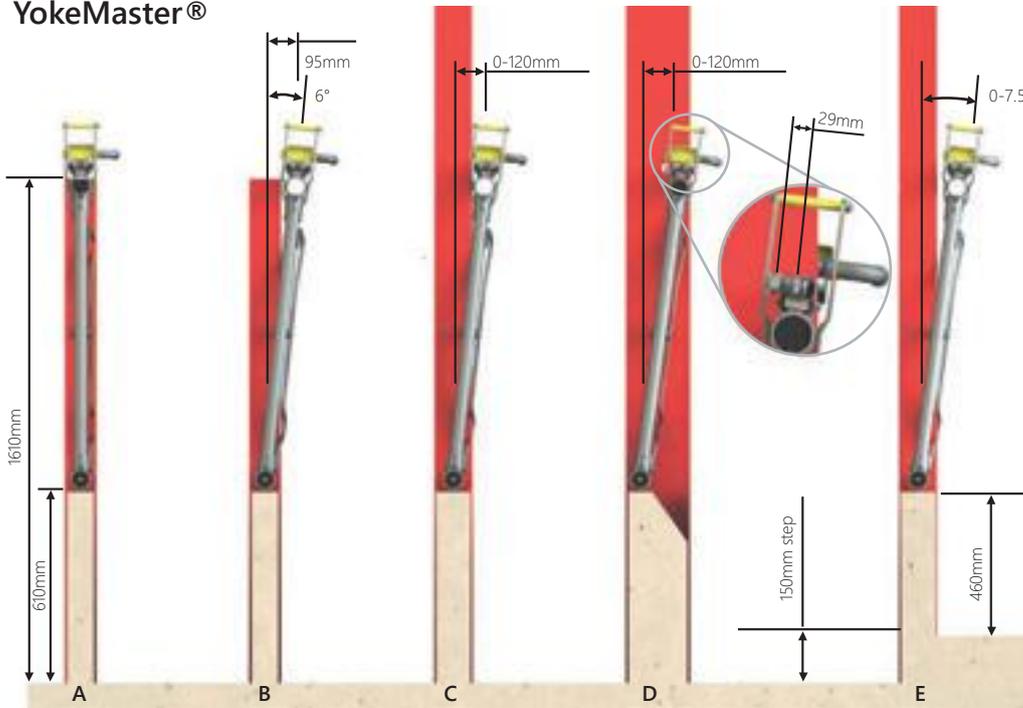

**NB:** The installation heights are based on typical mature dairy cows. These heights may require adjustment for different sized animals. Heights are based on the scrape passage floor level.

**Points to think about!**  
It is recommended that panels be inclined when installed.

By inclining the panels it has the following benefits:

- Reduced loads on the panels from animals as reach for fodder is increased
- Reduction in wear on animals shoulders/withers/neck
- No need to drill, operating rod passes directly in front of stanchion, negating the need to drill stanchion to link panels.

Example set-ups are pictured detailing installation arrangements.

A and B depict installation on posts vertical and inclined.

We recommend the panels to be inclined. In all installations it is important to maintain the 610mm dimension from the floor level.

C and D show installation when fitted to stanchions using angle brackets top and flat brackets bottom. Here the operating rod of linked panels runs across the face of the vertical. Whilst inclining the panels is recommended, this lean should not exceed 120mm (tube centres) - up to 7.5°.

D shows an inclined panel fitted within the web of a large stanchion. The RSJ will have to be drilled to accept the operating rod connector (linked panels).

E illustrates a stepped feed passage relative to the scrape passage, a step of 150mm is recommended.

Yokemaster panels c/w 2 angle and flat brackets (inclined installation)

Yokemaster panels c/w 4 angle brackets (installation on RSJ/post face)

Code	Length (mm)	Yoke Panels	Centres (mm)
F030 2251 40	630	1	770
F030 2251 41	1262	2	1425
F030 2251 42	1866	3	2005
F030 2251 43	2504	4	2645
F030 2251 44	3142	5	3280
F030 2251 45	3780	6	3920
F030 2251 46	4420	7	4560
F030 2251 48	5850	10	6000

Code	Length (mm)	Yoke Panels	Centres (mm)
F030 2251 30	630	1	770
F030 2251 31	1262	2	1425
F030 2251 32	1866	3	2005
F030 2251 33	2504	4	2645
F030 2251 34	3142	5	3280
F030 2251 35	3780	6	3920
F030 2251 36	4420	7	4560
F030 2251 38	5850	10	6000

Yokemaster panels c/w 4 flat brackets (installation on RSJ/post)

Code	Length (mm)	Yoke Panels	Centres (mm)
F030 2251 20	630	1	770
F030 2251 21	1262	2	1425
F030 2251 22	1866	3	2005
F030 2251 23	2504	4	2645
F030 2251 24	3142	5	3280
F030 2251 25	3780	6	3920
F030 2251 26	4420	7	4560
F030 2251 28	5850	10	6000

Code	Product Information
F030 2250 08	Yokemaster operating handle
F030 2250 09	Yokemaster operating rod joiner kit

Code	Product Information
F030 2012 27	90 x 90 SHS support post assembly
F030 2012 28	100 x 100 SHS support post assembly





This equipment is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that food safe or non-toxic epoxy is applied to areas of the product which will be in contact with silage, feed or water before use, and then periodically thereafter when it is empty, clean and dry in order to prevent corrosion of the steel and zinc and therefore extend the life of the equipment. See p.130 for further information.



The quality of the housed environment has a major impact on dairy herd welfare and economic performance. Time spent planning your dairy housing solution will reap the benefits for the life and productivity of the cows living within.

We have been manufacturing cubicles of varying designs for almost as long as we have been trading. During this time we have been involved with many large UK and internationally based dairy farms, as well as industry experts who have led us to design a tried and tested range of cubicles that offers your herd maximum comfort and welfare.



## Ultima® Cubicle


Our Ultima cubicle has been designed to be the modern choice for a successful dairy housing unit.

As per our previous cubicle styles, the Ultima maintains the same high head rail position, but also includes the option to raise the head rail further if required. To increase the lunge zone of the cow, we have also dropped the lower support rail closer to the bed, which helps to prevent head or leg traps and in addition to this, the upper support rail has also been lowered to prevent animals walking through the bed.

These features have greatly improved the acceptance rates into the bed and helped to achieve a higher percentage of animals lying correctly for the longest period of time.


### Key Points to Understanding the Ultima® Cubicle

- Suitable for stock over 22 months
- Improved initial standing position prior to lying down
- Reduced pressure on back legs due to correct preliminary position (no perching)
- Lying in correct position with large lunge zone
- Superb acceptance rates for improved comfort

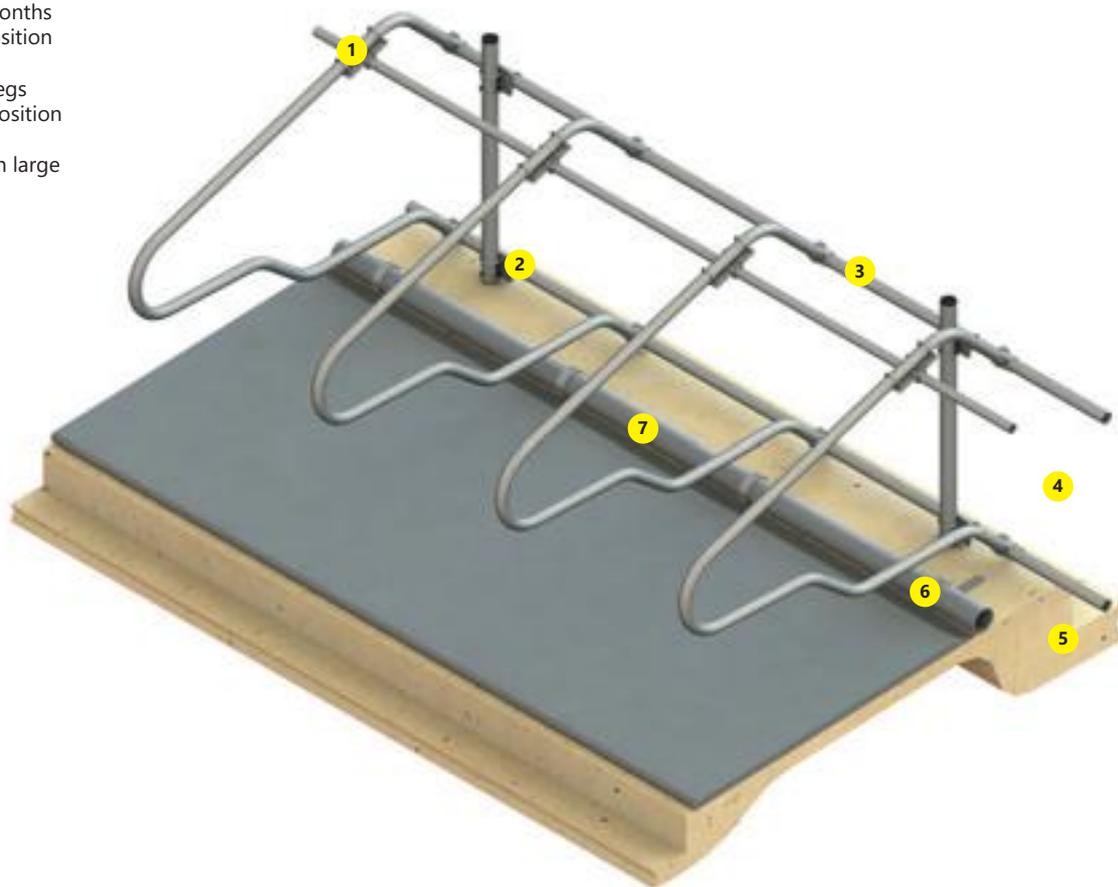

1. High headrail position improves standing position and increases acceptance into cubicle bed
2. Head to head clamp
3. Upper support rail positioned high enough not to interfere with the lunge zone yet still low enough to inhibit walk through for open fronted or head to head runs
4. The lunge zone which is now set with the upper support rail in a position to deter walkthrough, inhibits separated groups from merging with one another
5. Lower support rail positioned very close to the ground which clears space in the lunge zone encouraging the animal to manoeuvre more naturally in and out of the cubicle
6. New low profile brisket pipe fixing brackets to fit to concrete beds
7. Premium Comfort Brisket Pipe  
A cow friendly and hygienic positioning aid at the animals brisket


### Ultima Cubicle Single Run

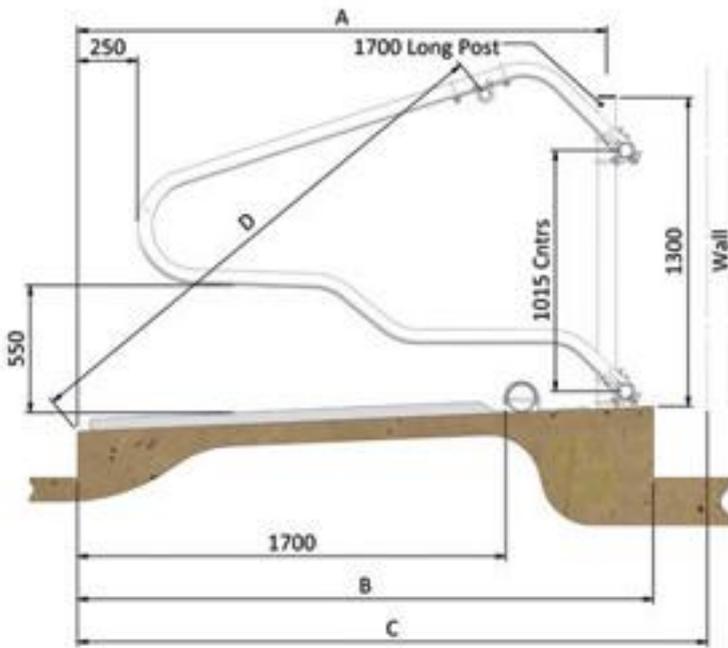

- The Ultima cubicle is suitable for use in a single run or head to head configuration
- The Ultima cubicles are available in 3 different lengths

Cubicle Length (mm)	A (mm)	B (mm)	C (mm)	D (mm)
1900	2105	2300	2300 (min.)	2140
2000	2205	2400	2400 (min.)	2210
2100	2305	2500	2700	2200

### Ultima Cubicle Head to Head

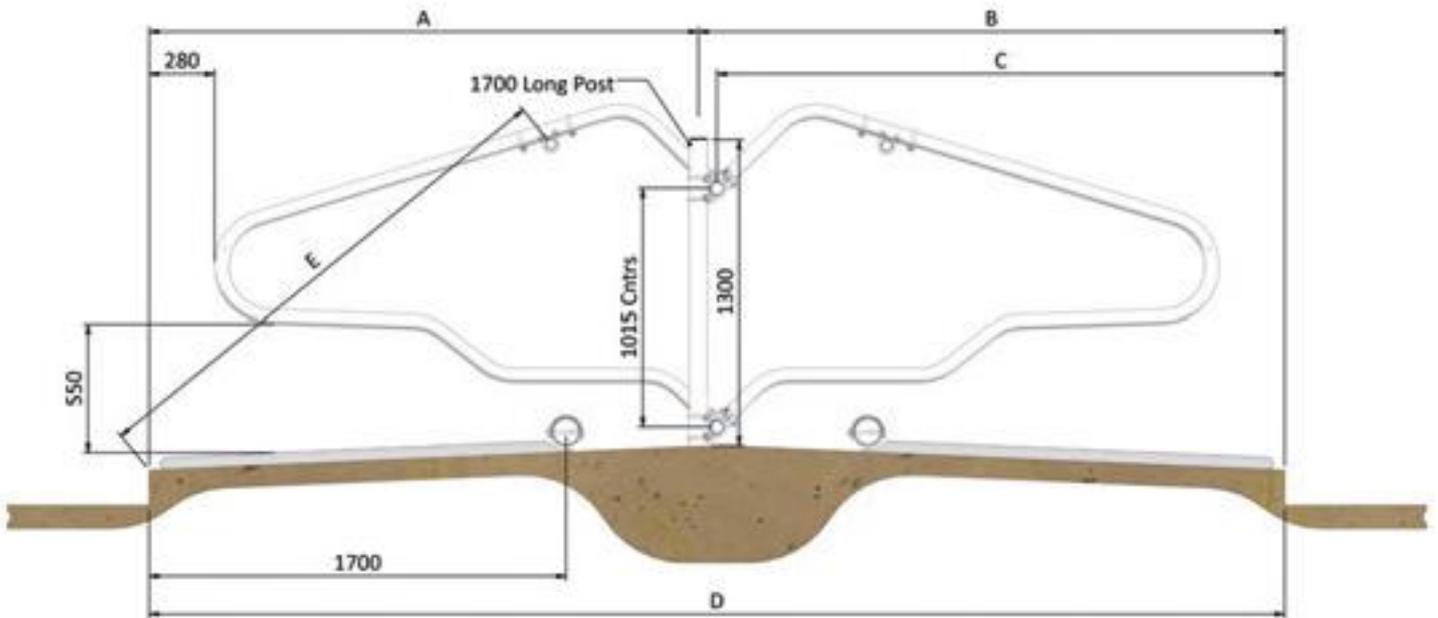

Cubicle Length (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
1900	2122	2278	2200	4400	2165
2000	2222	2378	2300	4600	2210
2100	2322	2478	2400	4800	2200




## Super Comfort Cubicle

An important aspect of the Super Comfort Cubicle is to offer easy installation, flexibility and improved cow comfort, which is all achieved by offering this cubicle with the 'post and rail' cantilever type loops. Super Comfort Cubicles provide a greater lunge zone, improved lying position and better space sharing. The removal of rear cubicle legs prevents any interference with the animal when rising allowing for increased animal welfare.

### Key Points to Understanding the Super Comfort Cubicle

- Suitable for stock over 22 months
- Young stock version available from 2 months
- Easy installation compared to concreted in cubicle divisions
- Cleaner beds when cubicles are set up correctly as animal will soil directly into scrape passage
- Less injury to animals compared to older cubicle designs
- Great acceptance rates from animals due to ease of use and comfort
- Can be used with the brisket pipe if required
- Available in shorter length loops allowing flexibility with older building refurbishments
- Easily upgraded to Ultima® at a later date if required

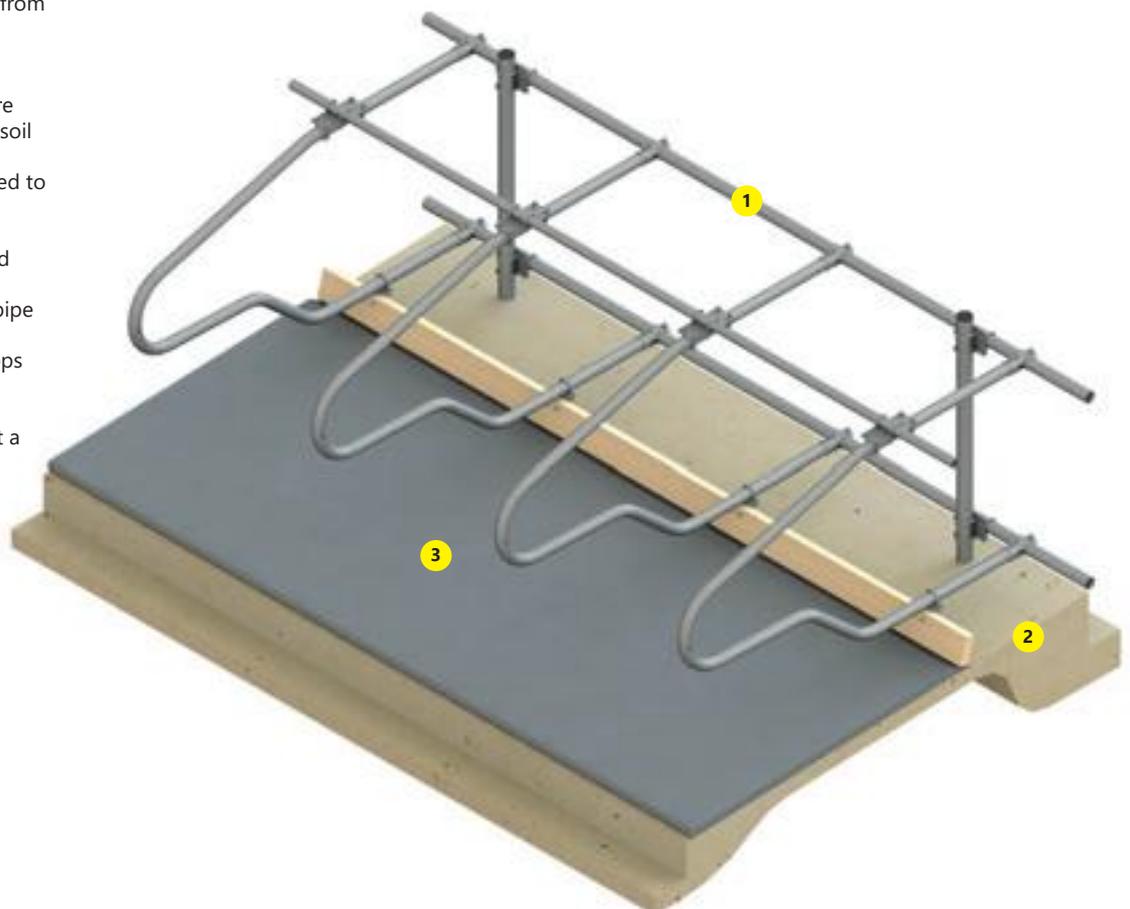


**1.** Post and rail cantilever systems offer greater comfort and flexibility over older freestanding cubicle designs

**2.** Designed to attach timber brisket boards to help position the animal correctly for increased lying times

**3.** No rear leg means better lying positions through space sharing whilst allowing animals to rise more easily


### Super Comfort Cubicle Single Run

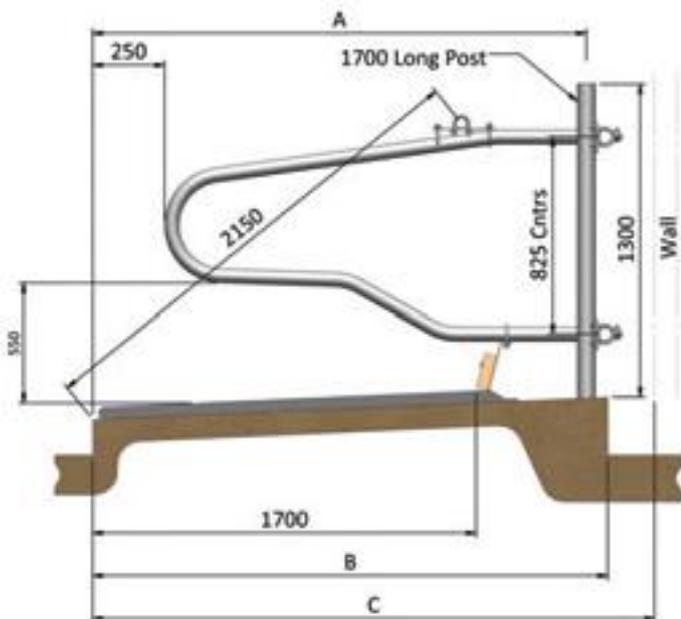

- The Super Comfort Cubicle is suitable for use in a single run or head to head configuration
- The Super Comfort Cubicles are available in 3 different lengths

Cubicle Length (mm)	A (mm)	B (mm)	C (mm)
1800	2010	2220	2200 (min.)
1900	2110	2300	2300 (min.)
2000	2210	2400	2600

### Super Comfort Cubicle Head to Head

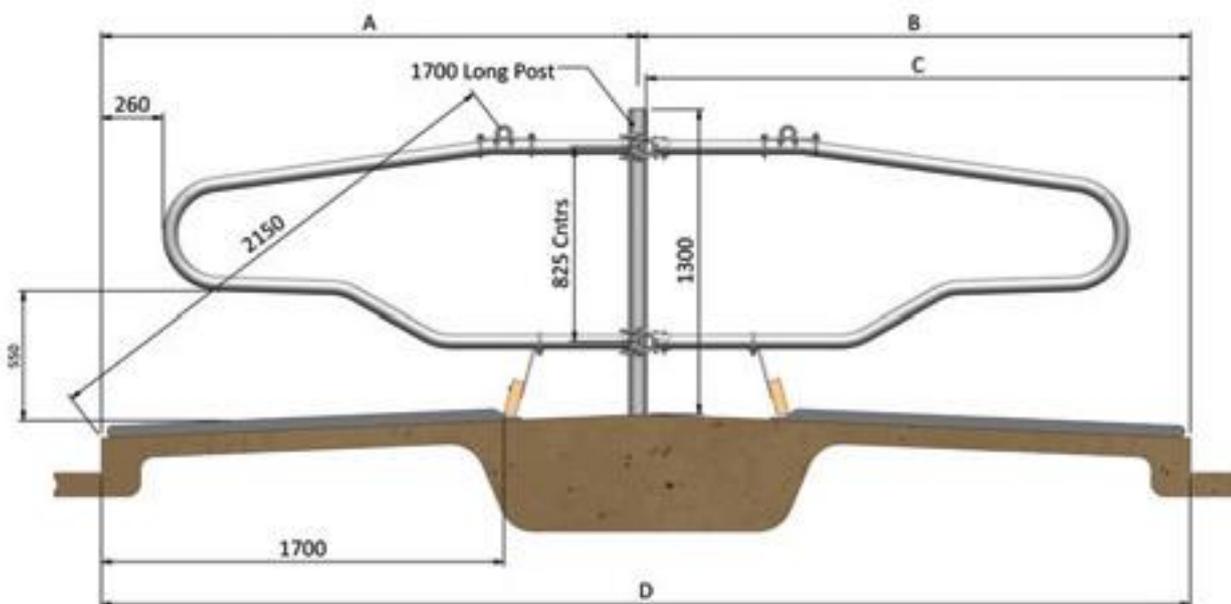

Cubicle Length (mm)	A (mm)	B (mm)	C (mm)	D (mm)
1800	2022	2178	2100	2100
1900	2122	2278	2200	2200
2000	2222	2378	2300	2300






## Super Sand Stalls


The Super Stand Stall has seen a large increase in popularity across the UK, particularly on some of the largest and most prominent units in the country. Influenced by practises adopted in North America, the Super Stand Stall has been specifically designed for use with deep fill sand beds and has been trialed by esteemed farmers, many of whom are RABDF Gold Cup Winners. IAE worked in conjunction with these farmers to design and manufacture a cubicle which meets the comfort requirements of a cow who is bedded on deep fill sand.

### Key Points to Understanding the Super Sand Stall

- Suitable for stock over 22 months
- Super Sand Stalls were predominantly designed to be configured in a head to head set up. This creates the maximum lunge zone and allows the cow to lie with social interaction
- Designed for deep sand, ideally 150mm to 200mm (100 min.), to improve comfort and cleanliness
- Sand has a low bacteria count which aids in mastitis management
- Sand decreases hock lesions and lameness

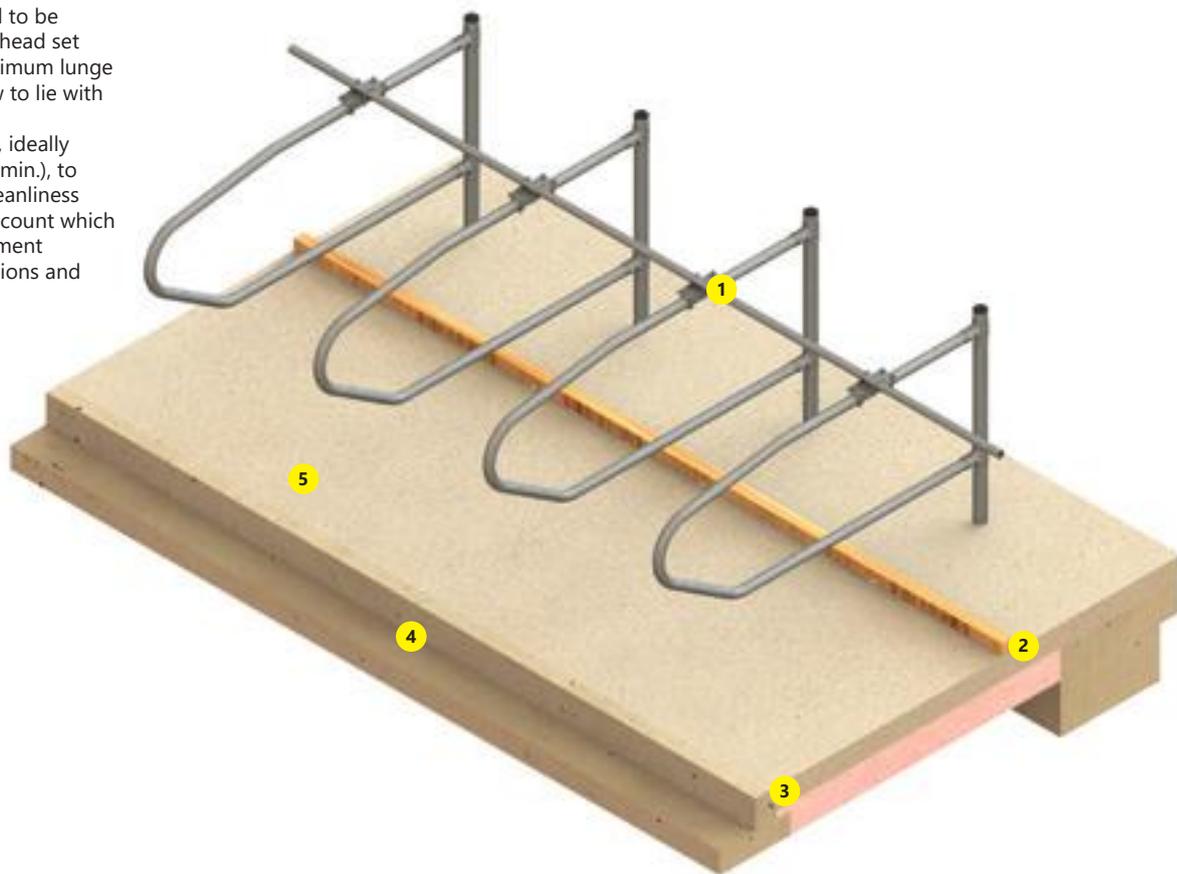

1. If using open fronted runs (middle row beds) there is opportunity for cows to perch at the head end of the cubicle and provision should be taken, possibly in the form of strap or rail, to prevent access to the cubicle bed from the wrong direction
2. For optimum comfort, brisket board to protrude 75mm above sand
3. Sand should be filled to the heelstone height, replenished regularly and raked clean and level
4. Sand over-spill from the bed into the scrape passages will increase traction and stability for the cow when loafing
5. For every 10mm the sand is below the heelstone, 10 minutes of lying time will be lost, e.g. 150mm reduction in sand depth equals 2½ hours per day of lost lying time

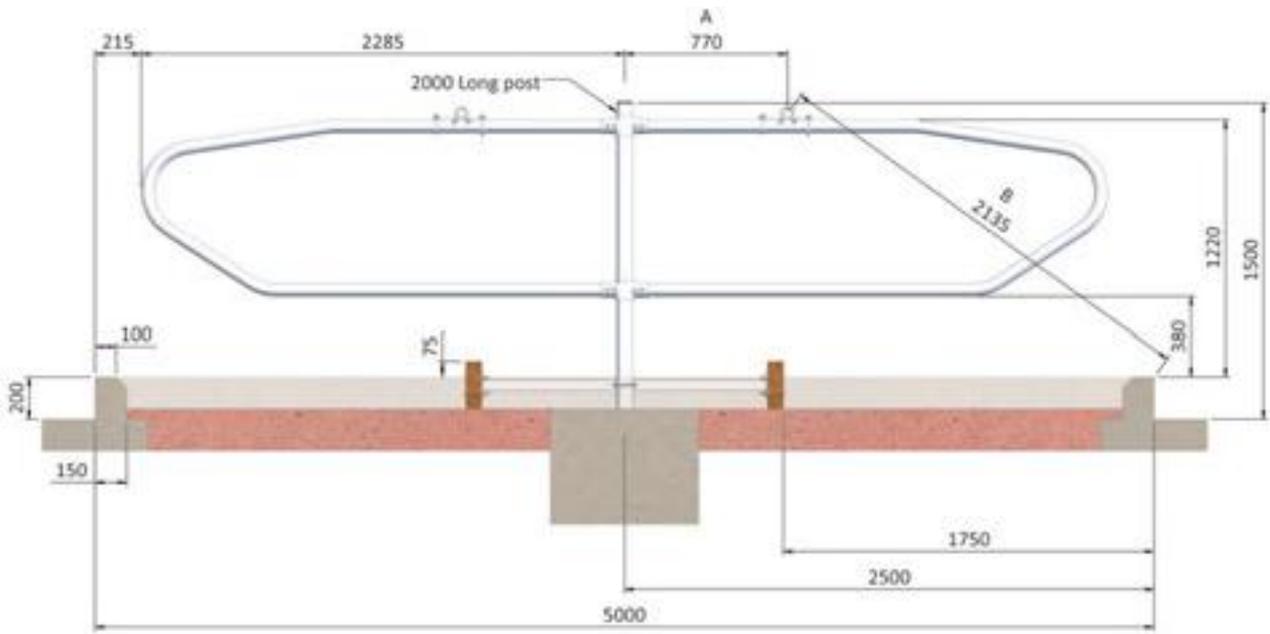

- Designed primarily for installing as a head to head set up
- When housing heifers in Super Sand Stall, adjust the dimensions A & B to 870mm and 2055mm
- Available in one length

## Cubicle Housing Gates

### 3 Rail Up and Over Gates

### Bungee Gate

Code
1003300-01

### 3 Rail Guillotine Gates



- Designed for use in cubicle buildings where traditional hinged gates are not suitable
- Helps control cattle movement
- Can be used for group separation
- Counter balanced weight makes for easy operation
- Optional cow or tractor height clearances available
- Available clearances 2175mm, 3000mm and 3500mm

- A cost effective solution for gating off passages and walkways in the cubicle housing environment
- Extendable between 2395mm and 5265mm.
- Includes receiver plate, allowing the gate to be fastened and secured when in use

- Designed for use in cubicle buildings where space is very restricted
- Helps control cattle movement
- Can be used for group separation
- Counter balanced weight makes for easy operation
- Available to suit various clearances

## Herringbone A.I. and Treatment Race



- Available as right hand and left hand standard units accommodating 12 cow spaces
- Standard units are 9790mm long x 1650mm wide (post centres)
- Allows larger numbers of animals to be handled in a short space of time
- Correct positioning of cows
- Reduces use of vets time on site resulting in a reduction in cost per cow
- Reduced labour and increases efficiency
- Better conception rates due to less stress in the animals
- Suitable when carrying out various tasks such as insemination, scanning, reading ear tags and TB testing if enough room is left at the front and rear of the animals

Code	Product Description
F025 2200 05	Right Hand Standard 12 Cow Unit
F025 2200 04	Left Hand Standard 12 Cow Unit

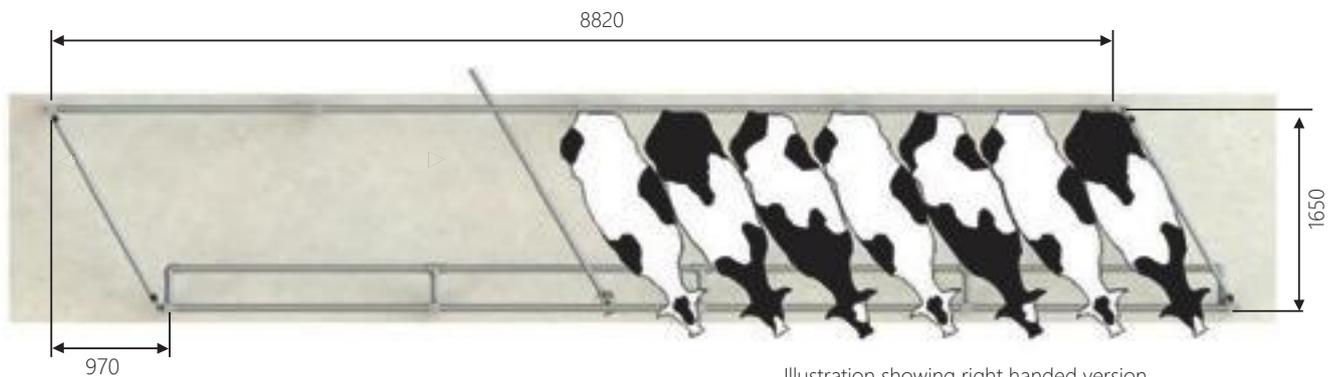


Illustration showing right handed version

## Rear Operating Front Opening A.I. Stalls




- Designed to be operated in banks of stalls with front opening gates for quick throughput
- 2060mm long x 4 Rail providing ideal vet access
- Supplied with rump chains
- Units set at 800mm centres
- May need some self assembly

Code	Product Description
F025 2101 01	Front gate and side panel
F025 2101 02	End panel to finish run

## Mattress System

Following considerable market research across Europe and North America, IAE chose Huber Technik, based in Erding, near Munich in Germany to provide their cow comfort mat and mattress systems. Huber Technik are unique in their manufacturing technique as they are the only manufacturer to use 100% new tyre compound to produce their products. Huber Technik was formed over 80 years ago, and like IAE, are still a family owned company. Due to the superior quality of their raw materials and manufacturing processes, Huber Technik can provide a regressive 10 year warranty on all products.


Over the past 30 years, Huber Technik have installed over 2.5million cow spaces/comfort systems with zero warranty claims. Huber Technik are highly rated by Germany's Agricultural Society ([www.dlg.org/en](http://www.dlg.org/en)) through a series of laboratory tests for comfort and durability. These are the most robust tests on the market and proves that Huber Technik's top cover and continuous rubber roll is six times stronger than similar products made in China.

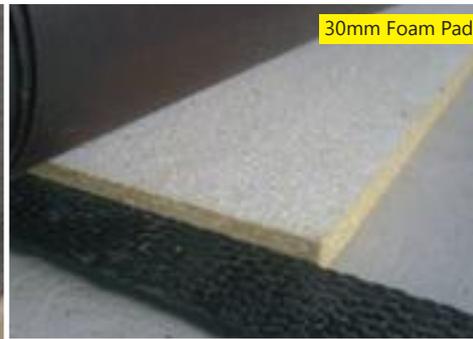

30mm Foam Pad



Plastic Protective Sheet

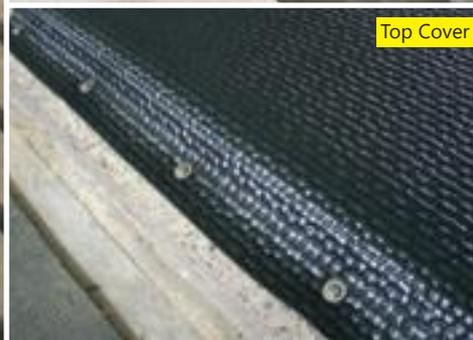

Top Cover

**What is unvulcanised rubber?** - Rubber that has not been previously moulded or heated

**Why is it better?** - When rubber is reused and recycled it loses some of its original properties, becoming harder and increasing the probability of cracking. This also may lead to the mat breaking down and rubber ending up in the food chain.



### DLG Testing and Certification

The 4GS system is DLG tested and has been awarded a certificate and the right to display the DLG "Fokus test" label

**Deformability and Elasticity** - Evaluates softness, comfort, and elasticity of a rubber mat before and after use, simulating 10 years of normal use

**Lying Time Comfort Test** - an independent test showed that the 4GS Mattress solution had 16 hours lying time versus 13 hour in an EVA mat and 6 hours of that of a basic solid rubber (no bungs) mat

**Abrasion Test** - Evaluates top-surface wear. After 10,000 rotations the mat is measured to evaluate top-surface wear resistance

**Slip Resistance Test** - Evaluates top-surface grip of a rubber mat. Surface grip prevents a cow from slipping. Relevant resistance measurements of a wet and dry mat are recorded to evaluate the overall slip resistance

**Tensile Test** - The N/mm<sup>2</sup> is 24.7 for Huber, scoring a ++ (DLG6014F) and 4.72N/mm<sup>2</sup> for the Chinese product a 0, (DLG5809F)

To see our full range of Cubicle Housing, please see our Dairy Brochure for more information

### Key Points

- PAH-Tested - (Polycyclic Aromatic Hydrocarbons) one the few mats on the market that is PAH-Tested and certified  
NB: High PAHs are present in cheaper rubber compounds and are highly toxic and carcinogenic, example Milk Liners must be PAH-Tested. Huber is one of the only mattresses in the world that is PAH-Tested
- New tyre compound – 100% rubber with no recycled material or cheap fillers
- Environmentally friendly for recycling after use
- Plastic wrap to contain foam pads supplied with every job
- Continuous roll manufacture
- Gentle honeycomb texture on top cover provides safe grip for stability and low abrasion
- Made in Germany - held to European standards
- Regressive 10 year warranty
- 0% warranty claims against roll or mattress
- Fixings supplied









The AG-fit range is a modular off-the-shelf solution for all your cattle housing requirements, which is primarily designed for loose housing, but is also suitable for a wide variety of other applications.



The easily assembled AG-fit range features an extensive collection of modular 5 rail two-part extendable gates and panels, waterers, posts and associated brackets to create a multitude of penning arrangements, available from your local AG-fit stockist.

- Off-the-Shelf
- Easily Assembled
- Quickly Sourced
- Purchased Off Plan
- Flexible and Reusable
- Heavy Duty Construction

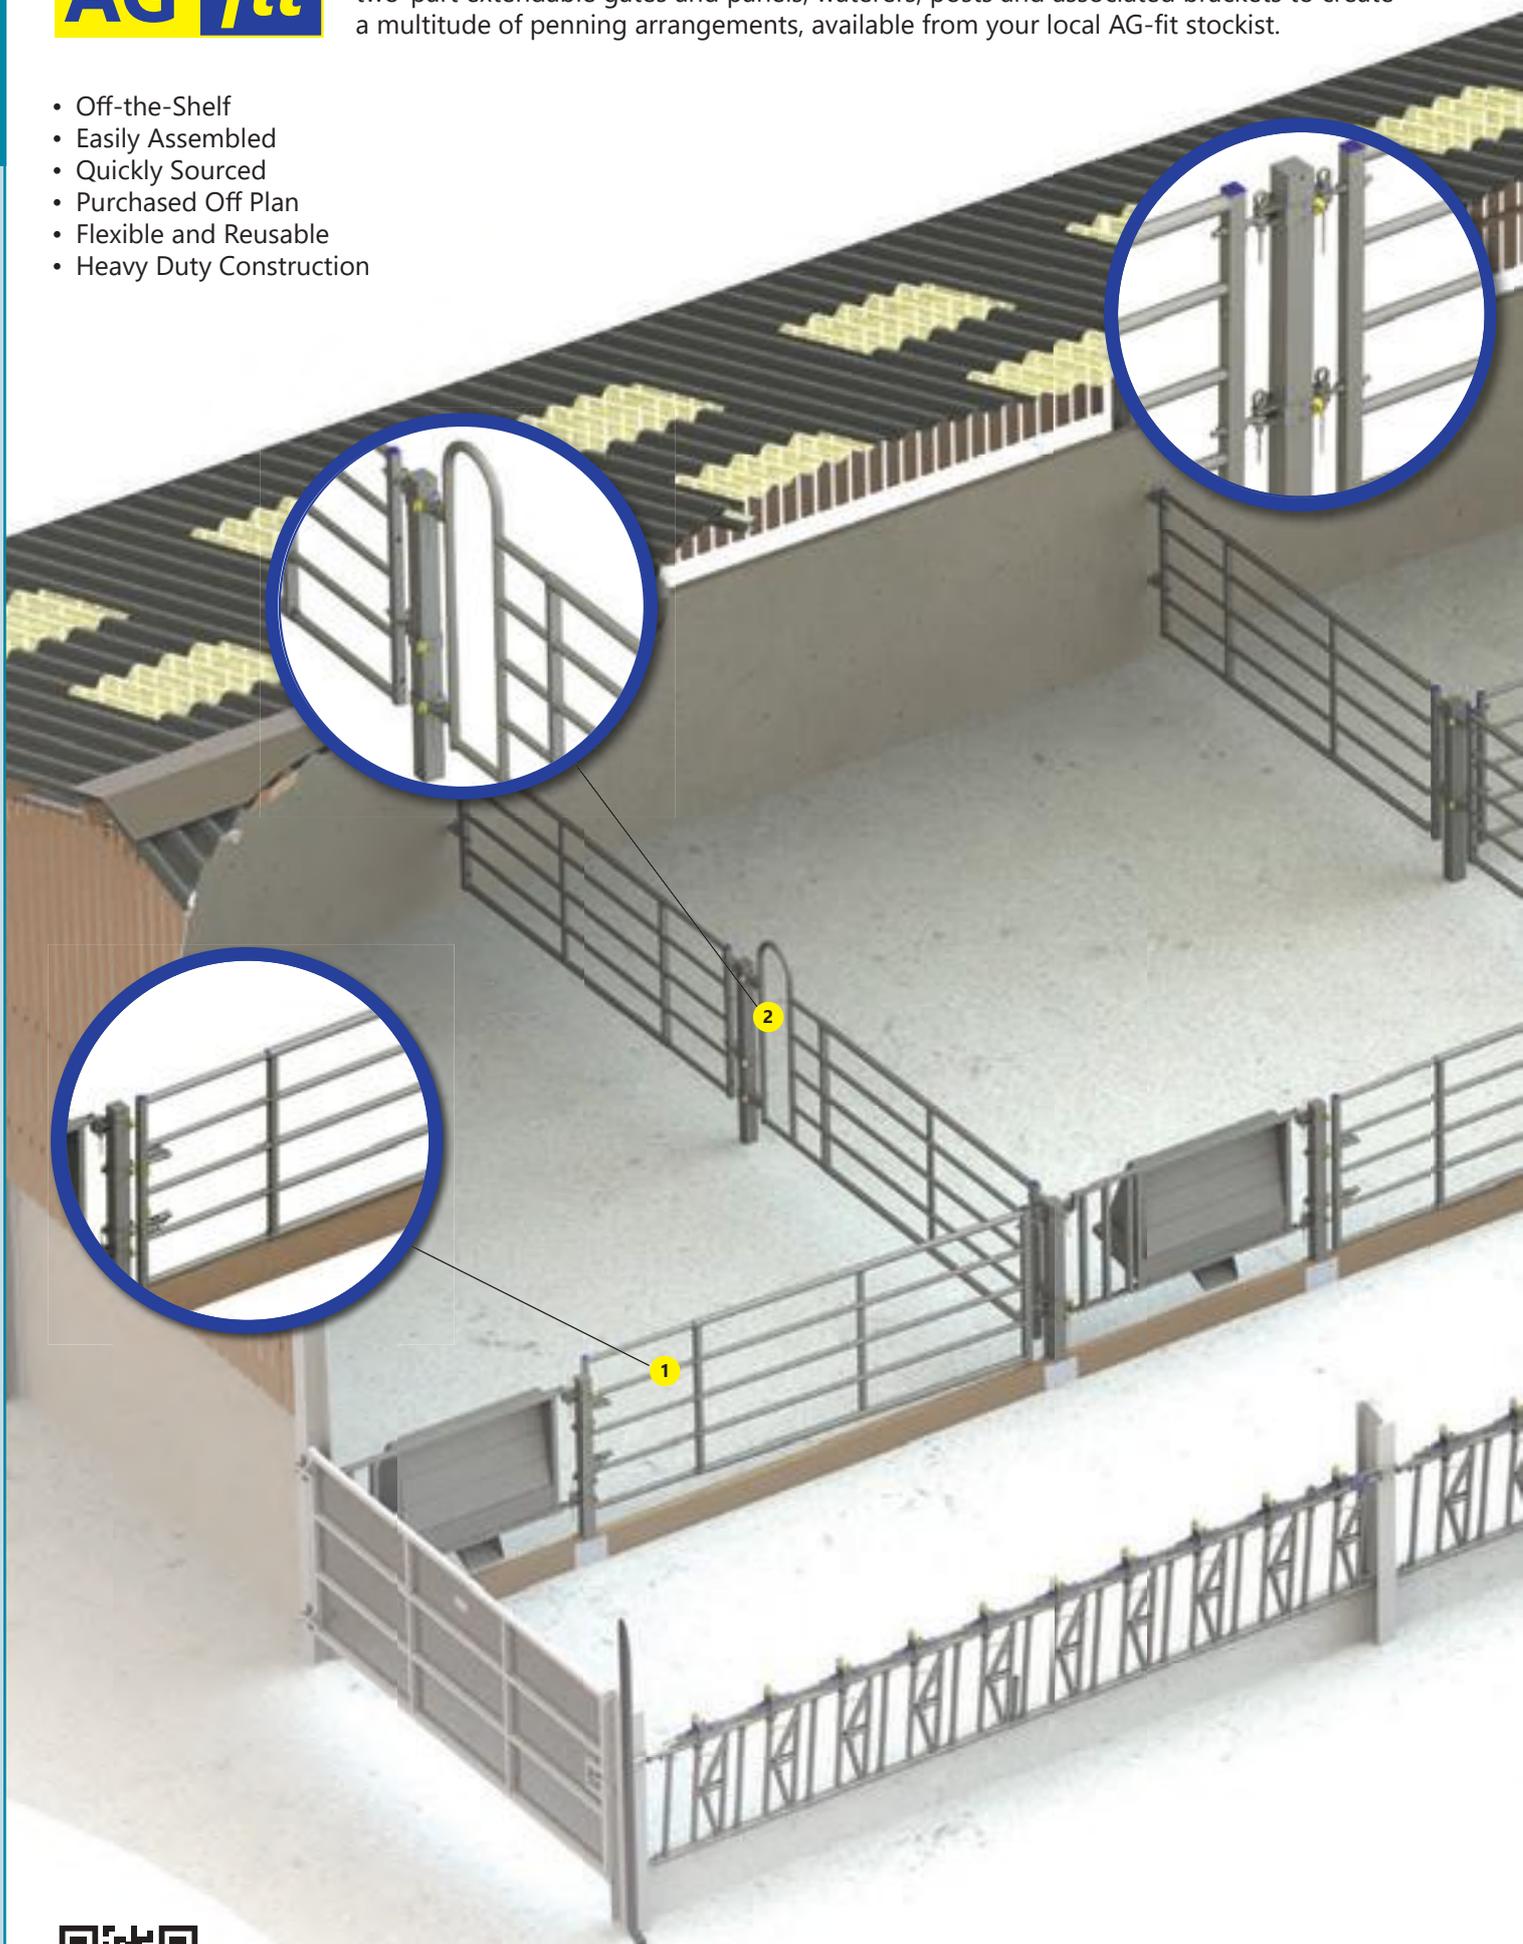

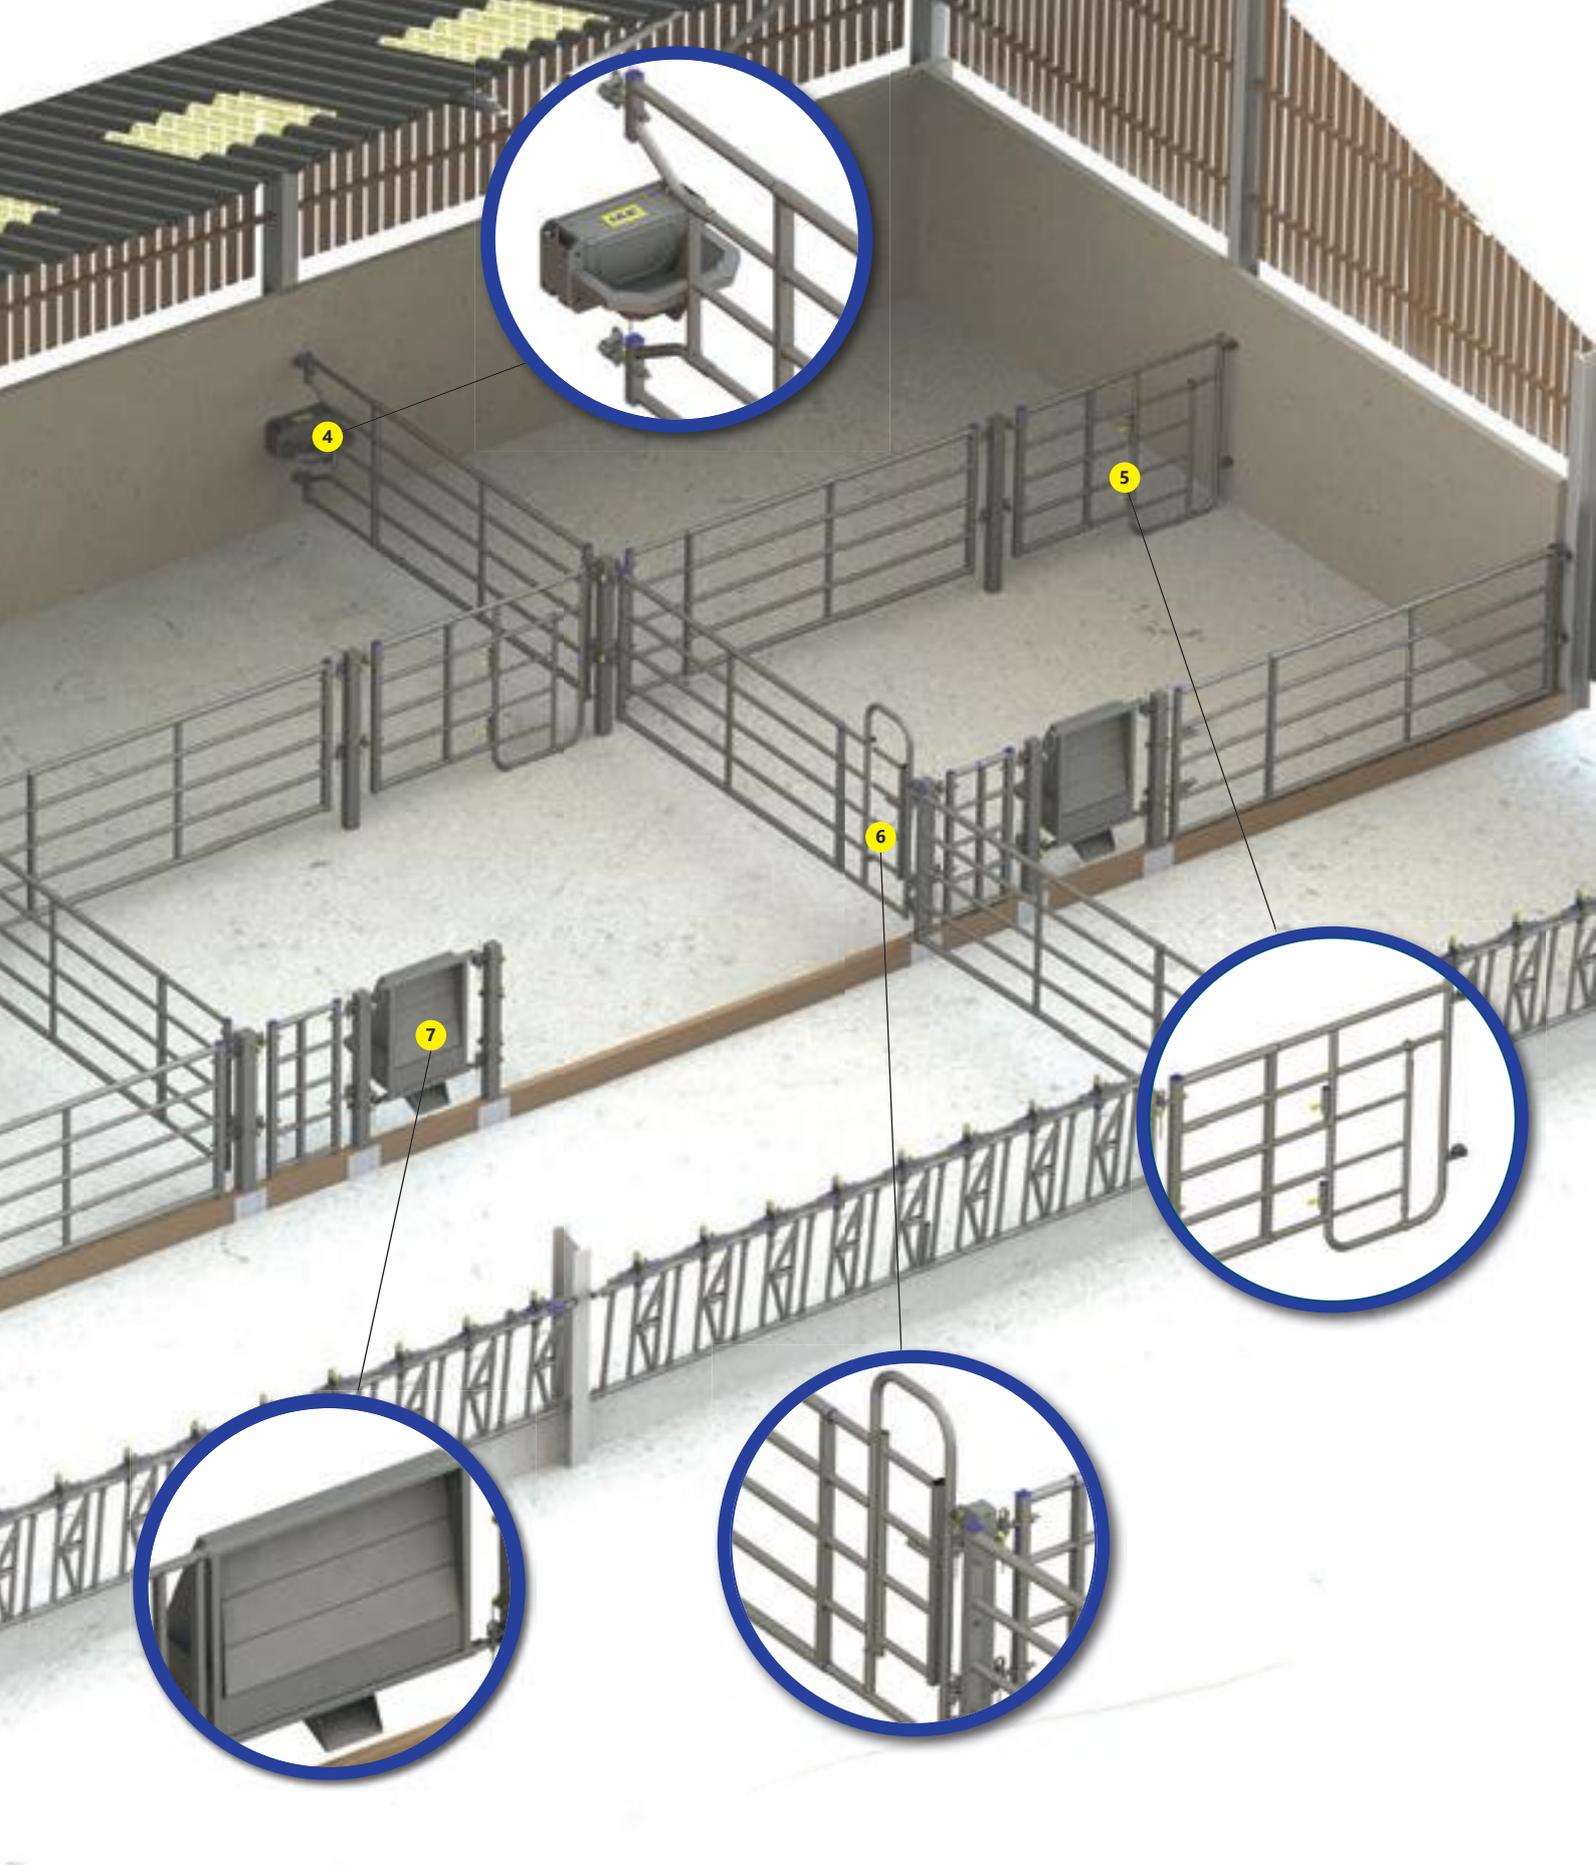

**1.** AG-fit 5 rail gates are an innovative high specification yard gate that feature 2 x padlockable spring bolts, chain hooks and 305mm rise built in as standard

**2.** Squeeze Gap Panel allows passage between pens holding small animals. See p.61

**3.** Clamp on Post brackets make for easy, off-the-shelf gate and panel mounting with no drilling required. A wide variety of brackets are available to suit all needs

**4.** A selection of panel ends to suit water bowls, Universal Drinkers (pictured) or water troughs in shared pens are available. See p.104 - p.105


**5.** Calf creep insert panel is adjustable for width, allowing smaller animals access to designated pens

**6.** Passage Gate Panel allows passage between pens holding small animals

**7.** The VisorDrink® is an all-in-one quick empty trough that is designed for easy drinking access but also to preserve water quality by shielding from blown straw and muck. See p.113

The AG-fit gate comprises of two parts, the Primary and the Insert, which assemble telescopically to create the desired length gate or panel. They are not designed to be variable length when in use.

A variety of different length Primary and Insert panels are combined to create the gate length of choice, along with different panel ends are also available, see p.61

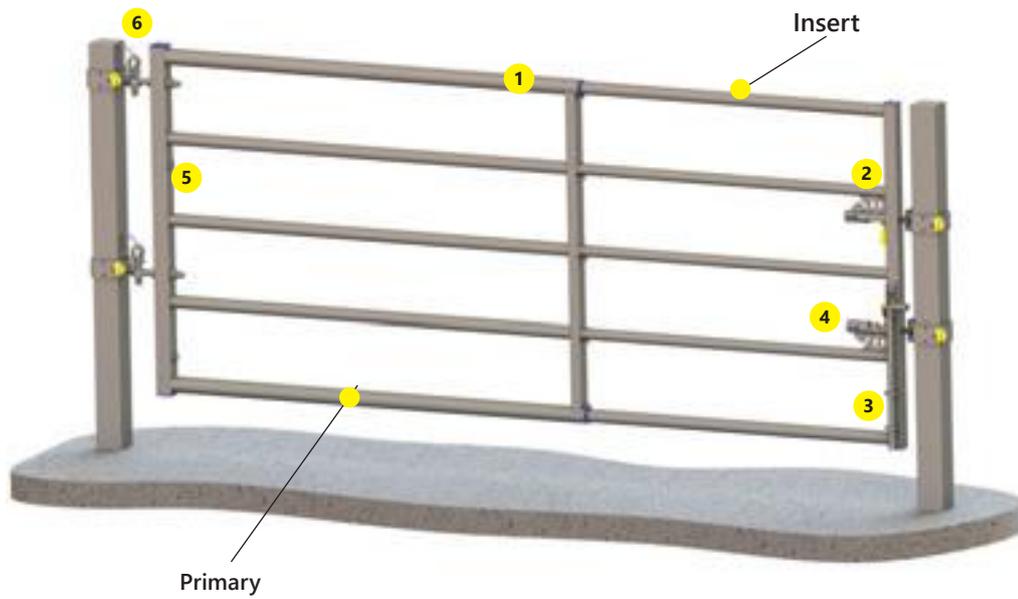


- 1.** 1.1 Polymer tube sleeve (top and bottom rails) smooth rail transition  
1.2 Inbuilt thread locking system  
1.3 Patented low profile tube locking



- 2.** Chain lashing (to adjacent gate) capability on every gate slam stile end x 2 (chain not included)




- 3.** Heavy duty drop bolt available, no drilling required (sold separately)

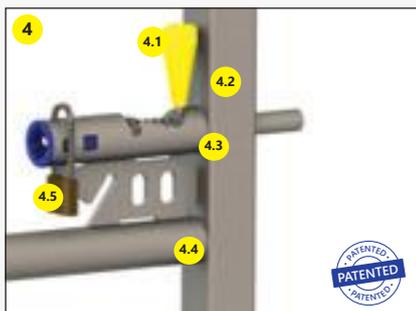

- 4.** 4.1 Easy to grab high visibility polymer handle  
4.2 Animal friendly neutral position  
4.3 Spring bolts can be locked in open position  
4.4 Twin spring bolt feature on every gate  
4.5 Spring bolts are padlockable (padlock not included)



- 5.** 5.1 Fully welded sleeve stiles compatible with existing IAE hang post (25mm hooks)  
Four sleeves per stile allows 305mm rise

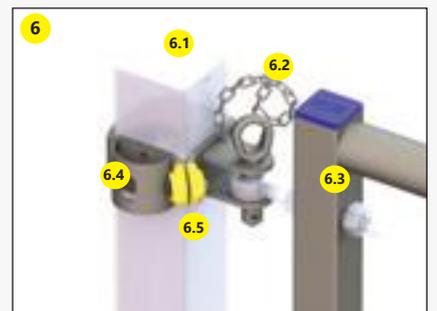

- 6.** 6.1 Welded post caps  
6.2 Chain prevents hinge pin loss  
6.3 Specially designed forged hinge pin  
6.4 Multiple hang/slam stile post bracket options  
6.5 Animal friendly polymer bracket caps



## AG-5 Passage Gate Insert

Combine a Primary and Passage Gate to create to allow access between pens holding small animals.

### AG-5 Passage Gate Recommended Combinations


Combined Panel Length	To Suit Nominal Opening*	Primary	+	Passage Gate Insert**
846 - 2145	1111 - 2410	1000112-01	+	F002 2006 01
1254 - 2553	1519 - 2818	F002 2001 01	+	F002 2006 01
2254 - 3553	2519 - 3818	F002 2001 02	+	F002 2006 01
3254 - 4553	3519 - 4818	F002 2001 03	+	F002 2006 01
4254 - 5553	4519 - 5818	F002 2001 04	+	F002 2006 01
5254 - 6553	5519 - 6818	F002 2001 05	+	F002 2006 01

\* Clear gap between post faces.

\*\*Insert may require cutting down to achieve length.

### Specification

Passage Loop  
48.3mm dia  
Top/Bottom Rails  
48.3mm dia  
Intermediate Rails  
42.4mm dia

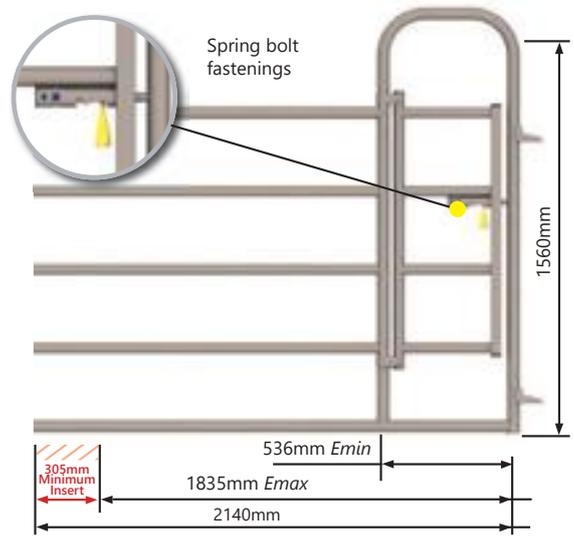

## AG-5 Squeeze Gap Insert

Panels featuring a squeeze gap can be created where passage between pens holding larger animals is required by combining the Squeeze Gap Insert with the desired Primary.

### AG-5 Squeeze Gap Recommended Combinations


Combined Panel Length	To Suit Nominal Opening*	Primary	+	Squeeze Gap Insert**
746 - 1872	1011 - 2137	1000112-01		F002 2007 02
1154 - 2280	1419 - 2545	F002 2001 01		F002 2007 02
2154 - 3280	2419 - 3545	F002 2001 02		F002 2007 02
3154 - 4280	3419 - 4545	F002 2001 03		F002 2007 02
4154 - 5280	4419 - 5545	F002 2001 04		F002 2007 02
5154 - 6280	5419 - 6545	F002 2001 05		F002 2007 02

\* Clear gap between post faces.

\*\*Insert may require cutting down to achieve length.

### Specification

Passage Loop  
48.3mm dia  
Top/Bottom Rails  
48.3mm dia  
Intermediate Rails  
42.4mm dia

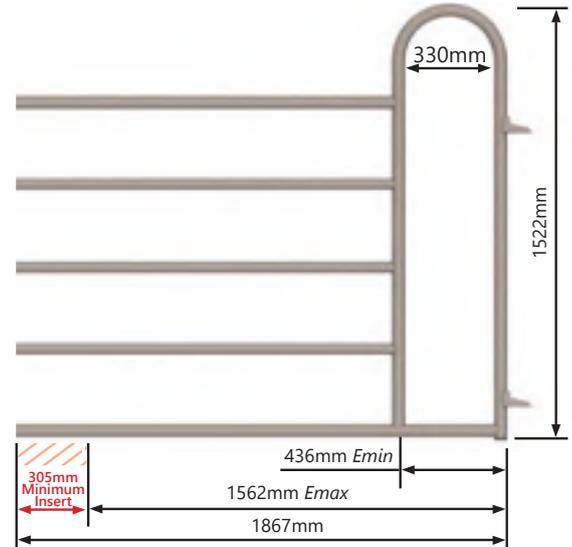

## AG-5 Calf Creep Insert

A Calf Creep Insert combined with a Primary will allow smaller animals to transition between pens, but not larger animals. The creep aperture can be adjusted from 120mm to 595mm.

### AG-5 Calf Creep Recommended Combinations


Combined Panel Length	To Suit Nominal Opening*	Primary	+	Calf Creep Insert**
1290 - 2445	1555 - 2710	1000112-01	+	F002 2005 01
1698 - 2853	1963 - 3118	F002 2001 01	+	F002 2005 01
2698 - 3853	2963 - 4118	F002 2001 02	+	F002 2005 01
3698 - 4853	3963 - 5118	F002 2001 03	+	F002 2005 01
4698 - 5953	4963 - 6118	F002 2001 04	+	F002 2005 01
5698 - 6853	5963 - 7118	F002 2001 05	+	F002 2005 01

\* Clear gap between post faces.


\*\*Insert may require cutting down to achieve length.

### Specification

Passage Loop  
48.3mm dia  
Top/Bottom Rails  
48.3mm dia  
Intermediate Rails  
42.4mm dia

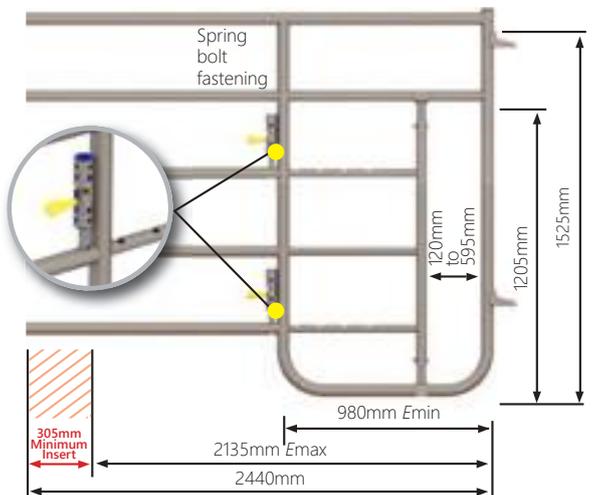

## AG-5 Back-to-Back Primary

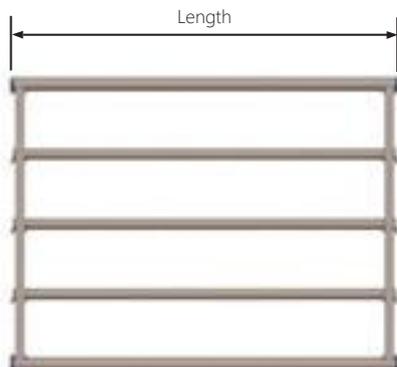

A multitude of panel variations can be created by combining two Inserts and one Back-to-Back Primary. Two lengths are available.

### Back-to-Back Primary Variants

Length	Back-to-Back Primary	No. Infillers
1658	F020 2002 01	2
2658	F002 2002 02	3

### Specification

Vertical Infiller  
60mm x 60mm  
Top/Bottom Rails  
60.3mm dia  
Intermediate Rails  
48.3mm dia


**IMPORTANT:**  
Back to back primary combined with gate variants not recommended in high traffic areas or high use areas.





Housing and handling individual or groups of bulls can be a dangerous operation without the correct equipment. We are able to offer a full range of standardised and bespoke equipment, designed specifically to comply with Health and Safety Regulations, whilst also possessing the required strength to handle such animals.

Our experienced team of Area Sales Managers are able to offer a wealth of technical advice that is individual to your requirements. Based upon this, a bull penning system can be designed that will work for your livestock enterprise.

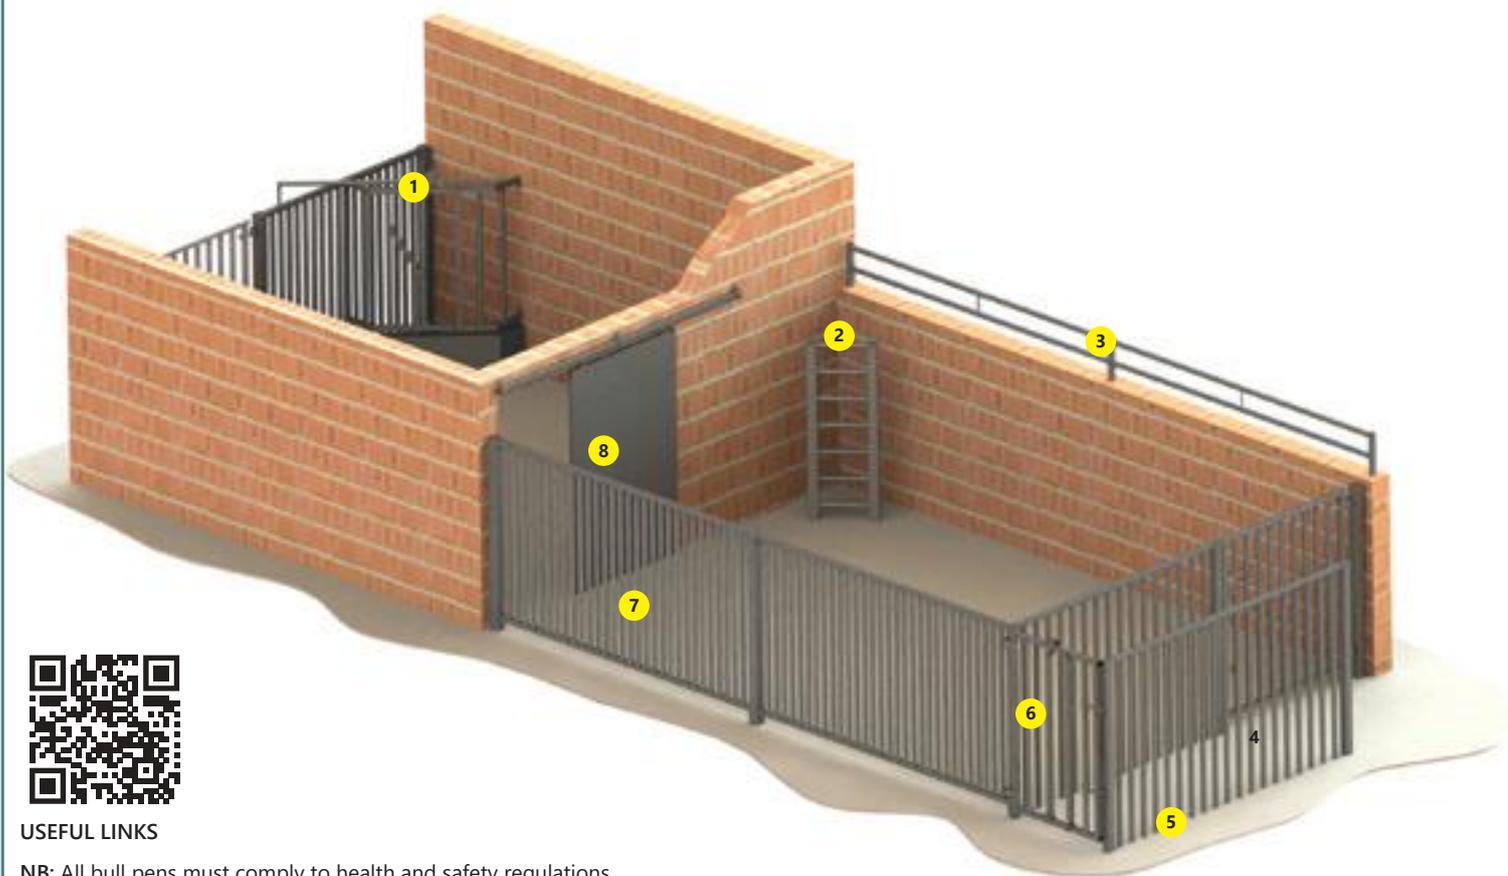

#### USEFUL LINKS

NB: All bull pens must comply to health and safety regulations.

1. The corner tie allows the bull to be secured either via the yoke or for the bull to be tied to it via a nose ring
2. The refuge is a robust steel ladder structure which is concreted into the ground to offer the handler protection should they become endangered by the bull, allowing them to climb out
3. Heavy duty 2 rail fencing runs along the top of the pen to prevent bulls from jumping out
4. The service pen sits just outside of the bull pen and is a safe space for the bull to service the cow. The bull enters and exits the service pen through the pen gate reducing bull travel
5. For maximum strength the railings in the service pen are set straight into the concrete
6. The service pen includes a yoke panel for holding the cow whilst being serviced, which doubles up as a gate which allows the cow to exit the service pen
7. Heavy duty H&S compliant railings enable the bull to see general farm activity
8. The sliding door allows the bull to be shut in a single side of the pen to make mucking out tasks safer

#### Points to think about!

- Bull pens are best positioned to allow the bull to see other cattle and general farm activity
- Pens should be a minimum of 1500mm high
- Vertical gaps inbetween partitions and gates should be no more than 100mm
- Rails should be a minimum of 48mm dia
- External doors and gates must be lockable and stockproof
- Penning should allow the bull to be fed and watered from the outside of the pen and incorporate a yoke or method of securing the animal using the nose ring
- A separate exercise yard with entry controlled by a gate operated from outside the pen is recommended to allow bedding up or cleaning out whilst the bull is contained in a separate area
- A refuge area is required with means of offering unobstructed escape safely from the pen

## Bull Safe Area

The bull safe area is designed to contain a bull when access to the bull pen is required.

- The bull safe area is entered via a guillotine gate operated from outside the pen for handler safety
- A full length gate is supplied on one side of the bull safe area for access
- Contains a feeder to encourage the bull inside

Code	Product Description
F060 2002 02	Standard bull safe R/H
F060 2002 12	Standard bull safe L/H





**IAE**

**NEW PRODUCT**  
See Page 77



This equipment is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that food safe or non-toxic epoxy is applied to areas of the product which will be in contact with silage, feed or water before use, and then periodically thereafter when it is empty, clean and dry in order to prevent corrosion of the steel and zinc and therefore extend the life of the equipment. See p.130 for further information.



# PORTABLE CATTLE FEEDING

## Yearling Circular Feeder



- 30mm x 30mm SHS horizontal rails
- 30mm dia tube vertical rails at 279mm approx centres
- Comes in two sections that require bolting together
- 460mm high welded sheeted base

Code	Diameter (mm)	Height (mm)	Feed Spaces
F030 2000 06	1600	1145	18

## Heavy Duty Circular Feeder



- 38.1mm x 38.1mm SHS horizontal rails
- 35mm dia tube vertical rails at 335mm approx centres
- Comes in two sections that require bolting together
- 670mm high welded sheeted base

Code	Diameter (mm)	Height (mm)	Feed Spaces
F030 2000 03	2135	1450	20

## High Density Feeders



- Floor feeding rectangular feeders
- Mitred corner sits flush, gives even more strength and helps the unit to sit square in conjunction with the bracket when animals are feeding
- Accommodates Heston type bales
- Sold flat packed

Code	Length (mm)	Width (mm)	Height (mm)
F030 2009 21	3050	1520	1450
F030 2009 23	3050	1940	1450

## Standard Circular Feeder



- 31.75mm x 31.75mm SHS horizontal rails
- 30mm dia tube vertical rails at 328mm approx centres
- Comes in two sections that require bolting together
- 535mm high welded sheeted base

Code	Diameter (mm)	Height (mm)	Feed Spaces
F030 2000 01	2135	1295	20

## Tombstone Feeder



- 48.3mm tube horizontal rails
- 38mm dia tube vertical rails at 592mm approx centres
- Comes in two sections that require bolting together
- 670mm high welded sheeted base

Code	Diameter (mm)	Height (mm)	Feed Spaces
F030 2000 24	2285	1150	12

## Rectangular Feed Bins



- Pre galvanised sheet metal feeding trough with centre ridge
- One drop down panel for ease of loading
- 40mm x 40mm SHS main frame
- 35mm dia tube vertical rails
- Some assembly is required

Code	Length (mm)	Width (mm)	Height (mm)	Feed Spaces
F030 2001 01	2440	1370	1360	22
F030 2001 02	3050	1370	1360	26

## Single Sided Barley Beef Feeder



- Flow control plates to regulate feed
- Fitted with agitator chains to counteract feed solidifying
- Fixed height trough

Code	Length (mm)	Width (mm)	Height (mm)	Capacity (L)
F030 2030 03	2440	770	1360	1020



## Large Capacity Barley Beef Feeder



- Comes with any hand lid
- C/w side and rear steps and is wide enough to fill with a bucket
- Pivoting baffle plate reduces wastage when filling with a bucket
- Flow control plate to regulate feed
- Adjustable height trough

Code	Length (mm)	Width (mm)	Height (mm)	Capacity (L)
F030 2030 05	3137	996	1738	1540



## Free Standing Portable 2 in 1 Feeders



- 405mm deep feed trough
- 60mm x 60mm RHS frame
- 35mm dia diagonal tube
- Comprises of posts, barrier and trough which require bolting together

Code	Length (mm)	Width (mm)	Height (mm)
F030 2003 33	3050	790	1375
F030 2003 34	4572	790	1375



## Goliath Calf Troughs



- 200mm deep half round trough
- Fully welded for liquid feeding
- Diagonal strut bracing below trough for added strength

Code	Length (mm)	Width (mm)	Height (mm)
F030 2020 07	2440	315	466



## Free Standing Calf Troughs on Legs



- Comes with splayed legs for stability
- 135mm deep trough
- Fully welded trough ends suitable for liquid feeding

Code	Length (mm)	Width (mm)	Height (mm)
F030 2017 12	1830	430	585
F030 2017 13	2440	430	585



## Free Standing Cattle Trough on Legs



- Comes with splayed legs for stability
- 200mm deep trough
- Centre ridge to separate feed

Code	Length (mm)	Width (mm)	Height (mm)
F030 2016 12	2440	895	795



## Heavy Duty Floor Feeding Bullock Trough



Code	Length (mm)	Width (mm)	Depth (mm)
F030 2018 01	2440	420	190



## Floor Feeding Cattle Trough



Code	Length (mm)	Width (mm)	Depth (mm)
F030 2019 01	2740	420	190



## Low Level Beef Trough on Legs and Badger Defence™



Shown with Badger Defence kit fitted  
(Kit supplied separately)

- 230mm approx deep trough
- Comes with vertical legs as standard
- 2 x welded RHS bracings for added strength
- Spinning rollers fitted to prevent grip on all four sides (Badger Defence)
- Stop the badger's ingress to the animals feed (Badger Defence)
- Preventing the spread of TB (Badger Defence)

Code	Length (mm)	Width (mm)	Height (mm)
F030 2016 30	2440	786	675
Code	Product Information		
F030 2016 45	Badger Defence Kit only		



## The Big Beef Trough



- A robust, off-the-floor feeding solution for cattle
- 760mm feed height, 744L volume
- 3m length allows more cattle to access the trough
- Optional Badger Defence kit available, for areas with high TB levels

Code	Length (mm)	Width (mm)	Depth (mm)
1006663-01	3004	756	410







Rearing calves is an important aspect of any cattle farming enterprise, as they form the future of your herd. A well reared dairy or beef calf will go on to be a highly productive and healthy adult cow. To aid the rearing of calves, we offer several penning options along with a de-horning crate, which is available in two sizes. These aim to make the process of managing calves throughout their lifetime as efficient as possible.

### Standard Calf Penning



- Maximum 1018mm high
- 25mm x 25mm SHS horizontal rails and end vertical stiles
- Welded slotted lugs at each end to suit 10mm dia coupling rod arrangement (rods extra)
- Supplied with plastic caps to top end of vertical stiles


### Standard Calf Pen Fronts



- Supplied with 2 x head spaces and 2 x bucket holders

Code	Length (mm)	Height (mm)
F055 2001 03	915	1017


### Part Sheeted Side Panels

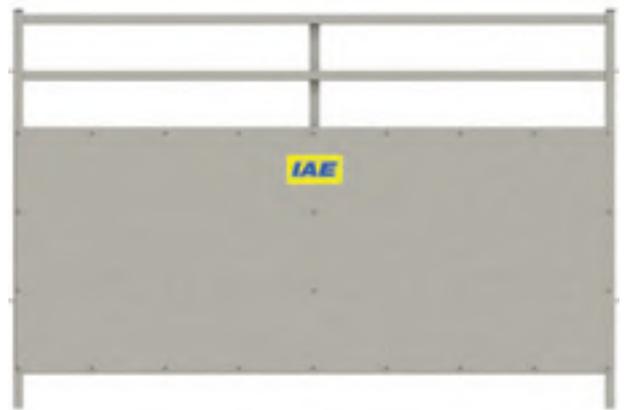

- Viewing gap at top of hurdle meets welfare standards for tactile contact


Code	Length (mm)	Height (mm)
F055 2010 05	1525	1018
F055 2010 06	1830	1018

### Standard 6 Railed Side Panels

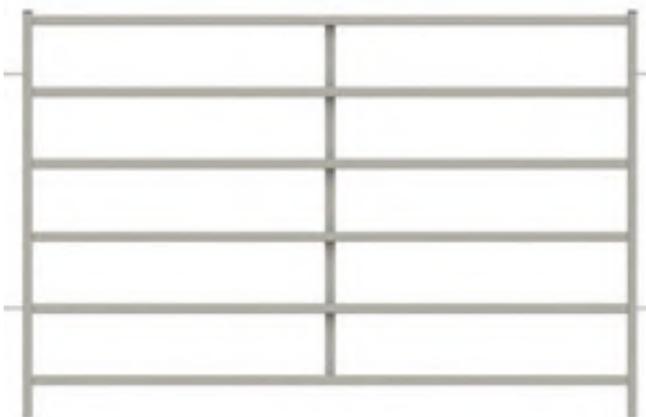


Code	Length (mm)	Height (mm)
F055 2015 05	1525	1018
F055 2015 06	1830	1018

### Fully Sheeted Back Panel

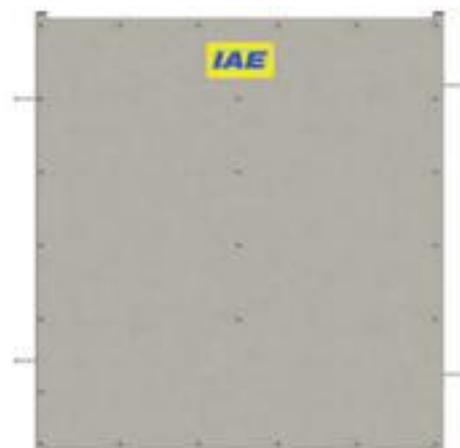

Code	Length (mm)	Height (mm)
F055 2020 03	1525	936

## 6 Railed Back Panel

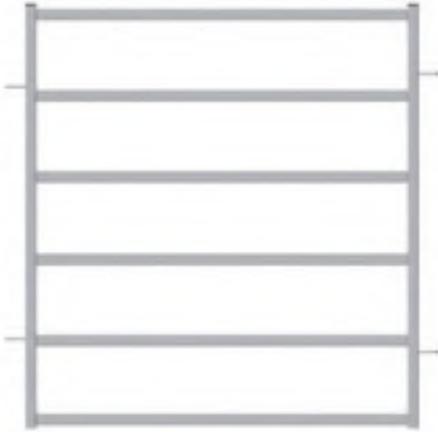

Code	Length (mm)	Height (mm)
F055 2015 03	915	936

## Double Sided Mesh Hay basket



- Slots over division panels
- Suitable for calf pens and lambing pens

Code	Length (mm)	Width (mm)	Depth (mm)
B107 0170 20	475	475	490

## Fittings to Standard Calf Pens



Code	Product
F035 2000 03	10mm dia coupling bar
F055 2030 01	Short plate c/w 1 lug
F055 2030 02	Full length plate c/w 2 lugs

## Extra Bucket Holders

Code	Product
B101 0601 00	Extra bucket holder



## Large Calf De-Horning Crate



- The rear panel on either side is hinged, allowing full access to the animals rear
- Calves walk in from the rear and exit through the front gate
- Yoke arm in fixed front gated section has adjustable ratchet catches
- Comes with wooden floor
- Supplied with adjustable wooden head rest and rope restraint
- Supplied with belly strap and backing up bar
- Wheels and handles can be purchased at an additional cost if required

Code	Length (mm)	Width (mm)	Height (mm)
F059 2002 01	1185	480	1195
F059 2003 01	Wheels and handles to suit the above		

## Small Calf De-Horning Crate



- The rear panel on either side is fixed
- Calves walk in from the rear and exit through rear
- Yoke arm has adjustable ratchet catches
- Comes with wooden floor
- Supplied with adjustable wooden head rest and rope restraint
- Supplied with belly strap and backing up bar
- Wheels and handles can be purchased at an additional cost if required

Code	Length (mm)	Width (mm)	Height (mm)
F059 2001 01	915	380	1020
F059 2003 01	Wheels and handles to suit the above		

## Calf Creep Feeder



- Designed to be suitable for calves of varying sizes and includes a 725 litre hopper
- The hopper is intricately folded from heavy gauge galvanised sheet steel, which provides the whole unit with rigidity and strength
- The hopper lid slides forward on nylon rollers to allow greater access
- Built in 3-point linkage and pallet fork lifting points make it easy to transport
- The front apertures offer plenty of adjustment with 3 height and 2 width settings

Code	Width (mm)	Deep (mm)	Height (mm)
F030 2025 07	2500	1857	1355

HELPS US TO CONFIRM WHO IS  
WANT AND HOW MANY LAMBS  
THEY ARE EACH EXPECTING.

THEY ARE EXPECTING  
THIS HELPS US TO MAKE SURE  
THEY HAVE THE RIGHT AMOUNT



# LAMBING EQUIPMENT

## Lamb Adopter Front



Code
F053 2000 10


## 7 Rail Interlocking Sheep Hurdle



Code	Length (mm)	Height (mm)
F052 2000 02	1220	970
F052 2000 04	1830	970

**NB:** The intended use for interlocking sheep hurdles is to form large holding pens or small individual pens. If used for long single runs of lambing pens or back to back lambing pens some joints will need to be cable tied together. Specification may vary.

## Part Meshed Lambing Hurdle

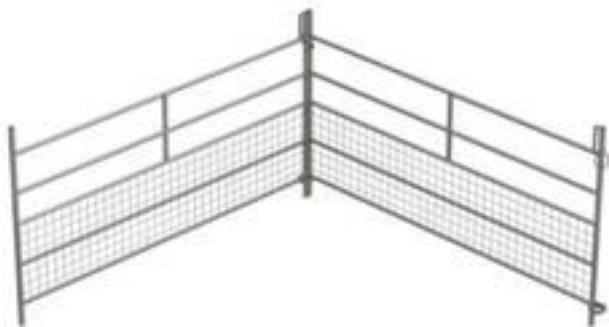


- Can be used to form banks of single runs using top loose ring and fixed 60mm x 60mm bottom lug type coupling arrangement
- Not compatible with standard 7 rail interlocking sheep hurdles
- 5 horizontal rails and clad with 50mm x 50mm weld mesh up to a height of 524mm from floor level
- Coupling rod type available to form back to back runs

Code	Length (mm)	Height (mm)
F052 2002 02	1230	1050
F052 2002 03	1840	1050



## Lamb Creep Hurdle

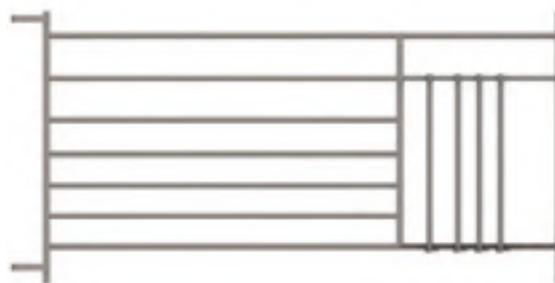

- Loop type coupling arrangement to ensure compatibility with interlocking sheep hurdles
- 7 horizontal rails
- Creep apertures built in to a 535mm approx long opening at one end

Code	Length (mm)	Height (mm)
F052 2001 01	1830	970

## Alpaca Hurdle c/w 8 Rails



Code	Length (mm)	Height (mm)
F052 2060 06	1830	1296
F052 2060 08	2440	1296

**NB:** The intended use for alpaca hurdles is to form large holding pens or small individual pens. If used for long single runs back to back some joints will need to be cable tied together. Specification may vary.






This equipment is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that food safe or non-toxic epoxy is applied to areas of the product which will be in contact with silage, feed or water before use, and then periodically thereafter when it is empty, clean and dry in order to prevent corrosion of the steel and zinc and therefore extend the life of the equipment. See p.130 for further information.

Many sheep farming enterprises choose to manage their lambing period via indoor housing as it makes the ewes easier to oversee throughout the process. We aim to offer a full range of hurdles and troughs that can be removable, allowing you to use your shed for other purposes outside of lambing time. We also offer walk through troughs, that double up as a pen divider and a feed trough.



**Adjustable Horizontal Rail Sheep Feed Hurdle**

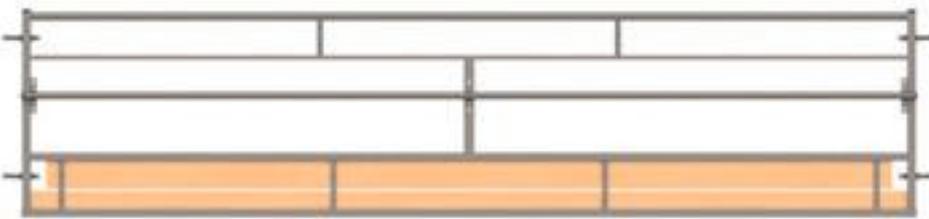


- 1000mm high incorporating a 315mm high timber base
- Supplied with adjustable eyes (coupling bar not included)
- Bespoke sizes available up to 4575mm (POA)

Code	Product Description
F051 2403 01	4315*mm
F051 2403 02	4315*mm c/w access gate
F051 2820 02	50mm x 50mm post (on base plate)
F051 2820 03	50mm x 50mm post (into ground)
F051 2820 20	80mm x 80mm post (into ground)
F051 2018 03	Coupling bar

\* Panels fit in at 4570mm centres when used with 50mm x 50mm posts.

**Adjustable Horizontal Rail Sheep Feed Hurdle with Access Gate**

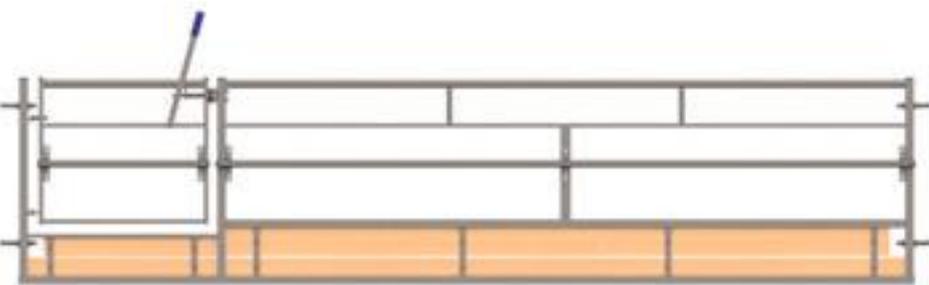

**Vertical Railed Sheep Feed Hurdle**



- 1000mm high incorporating a 315mm high timber base
- Supplied with adjustable eyes (coupling bar not included)
- Bespoke sizes available up to 4575mm (POA)

Code	Product Description
F051 2401 15	4575mm
F051 2401 25	4575mm c/w access gate
F051 2820 02	50mm x 50mm post (on base plate)
F051 2820 03	50mm x 50mm post (into ground)
F051 2820 20	80mm x 80mm post (into ground)
F051 2018 03	Coupling bar

**Vertical Railed Sheep Feed Hurdle with Access Gate**



Hurdles will be supplied handed as per images above unless otherwise stated

## Standard Walk Through Feeder



- Predominantly designed to feed sheep off the floor
- Also suitable for use as a pen divider, separating batches of ewes
- Bolt on lugs can be purchased at an extra cost for facilitating the coupling of hurdles
- Available with a choice of optional end panels
- Bespoke sizes available up to 3050mm (POA)

Code	Length (mm)	Width (mm)	Height (mm)
F035 2020 11	2465	690	965
F035 2020 12	3000	690	965



## Self Closing Gate End



Code	Product Description
F035 2020 30	Fully meshed c/w fixings

Walkthrough Trough sold separately

## Trough End



Code	Product Description
F035 2020 16	Suits walkthrough feeder

Walkthrough Trough sold separately

## Clip on End Panel



Code	Product Description
F035 2020 15	For standard walk through feeders

Walkthrough Trough sold separately

## Trough Joiner Inserts

To suit walk through feed troughs



Code	Product Description
F035 2020 22	100mm wide walkthrough feeder

## Bolt on Lugs

To suit walk through feed troughs



Code	Product Description
F035 2020 20	For fixing feed hurdles & penning hurdles/pair





**NEW PRODUCT**  
See Page 93



Our comprehensive range of sheep handling products and systems have been developed to incorporate many customer driven ideas. The modular nature of the components to form a system make it easy to design a completely unique system from the beginning, or to start small with a basic system and build upon it with further components in the future. Additionally, the accompanying handling equipment, such as weighers, drafters and turnover crates have been designed with customer usability in mind. Whether using as a standalone product or attaching to a system, the handling equipment will bring efficiency and ease to your sheep farming enterprise.



### Sheep System A Starter Kit



- 5000mm race makes treating and sorting sheep an effortless task
- Guillotine gate allows the operator to control the number of animals in the race at any one time, lift and swing guillotine allows the control of the number of animals and also allows easy access to the race for the operator. Supplied with a pivot as standard for future expansion
- Two-way drafting gate allows animals to be sorted at the end of the race
- Additional hurdles can be attached via the drilled lugs
- Race can be tapered

Qty	Product Description
4	2500mm long sheeted hurdles c/w drilled lugs
1	Drafting/stop gate
1	Race joiner arch
1	Lift & swing guillotine gate to suit swing & slide gate
8	Coupling rods

**Code** F051 2202 08

### Sheep System A Basic Kit




- Includes all the features of the starter kit
- A forcing pen complete with a swing and slide gate encourages animals to keep moving through the system
- Includes a holding pen, capable of holding 10-16 full size breeding ewes
- Sliding gates encourage animals to move between the 2500mm holding pens

Qty	Product Description
5	2500mm long sheeted hurdles c/w drilled lugs
1	Drafting/stop gate
1	1 race joiner arch
1	Lift & swing guillotine gate to suit swing & slide gate
1	Swing and slide gate
1	2500mm long 6 rail hurdle c/w drilled lugs
1	660mm long sheeted hurdle c/w drilled lugs
1	2500mm long 6 rail sliding gate hurdle
2	2000mm long sheeted radius hurdles c/w drilled lugs
15	Coupling rods

**Code** F051 2202 05

## Sheep System A

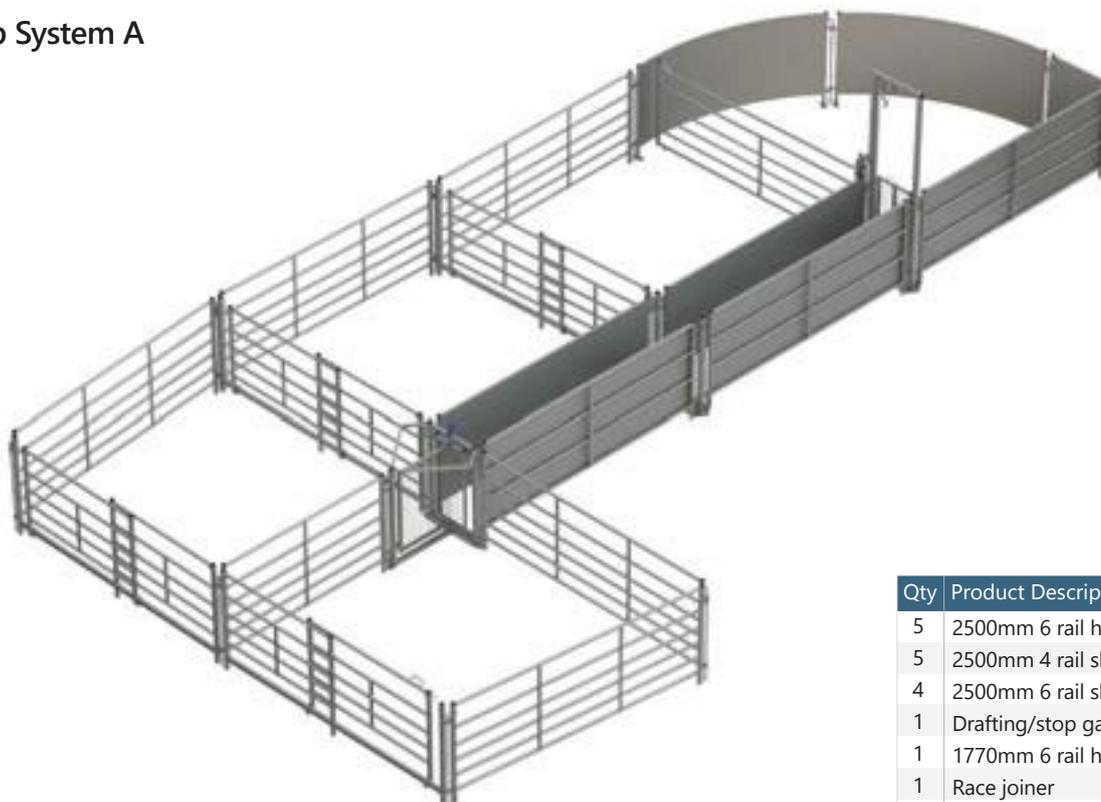


- Capable of holding between 40 and 60 breeding ewes (size dependent) at any one time
- Approximately 10000mm long by 5000mm wide
- 5000mm race makes treating and sorting sheep an effortless task
- Sliding gates encourage animals to move between the 2500mm holding pens
- A forcing pen complete with a swing gate encourages animals to keep moving through the system
- When working with smaller animals (lambs) the race can be tapered to accommodate them
- Two-way drafting gate allows animals to be sorted into two further dispersal pens, each capable of holding between 10 and 16 breeding ewes (size dependent)

Qty	Product Description
5	2500mm 6 rail hurdle
5	2500mm 4 rail sheeted hurdle
4	2500mm 6 rail sliding gate hurdle
1	Drafting/stop gate
1	1770mm 6 rail hurdle
1	Race joiner
23	Coupling rods
1	2595 swing and slide gate
1	Guillotine gate c/w swing/slide gate pivot
2	2000mm sheeted radius hurdle
1	660mm sheeted hurdle

**Code F051 2202 06**

## Sheep System B

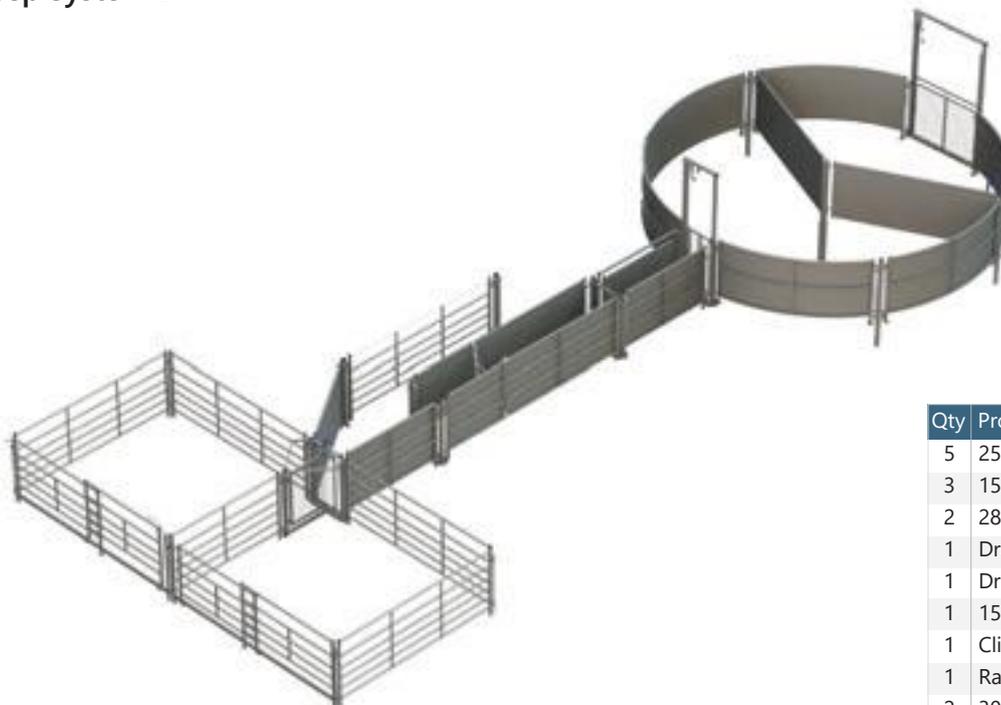


- Capable of holding up to 40 breeding ewes (size dependent) at any one time
- Approximately 13480mm long by 5640mm wide
- Traditional 4880mm circular forcing pen comes with ring system gate hinges
- 6100mm sheeted race includes a slipway section for use with a dipping bath (bath not included)
- Easily operated sliding gates allow animals to exit from the 2820mm wide dispersal pens
- When working with smaller animals (lambs) the race can be tapered to accommodate them
- Two-way drafting gate allows animals to be sorted into two further pens, each capable of holding between 12 and 18 breeding ewes (size dependent)

Qty	Product Description
5	2500mm 6 rail hurdle
3	1525mm 4 rail sheeted hurdle
2	2820mm 6 rail sliding gate hurdle
1	Drop gate in frame
1	Drafting/stop gate
1	1525mm 6 rail hurdle
1	Clip on none return gate
1	Race joiner
2	3050mm 4 rail sheeted hurdle
1	1525mm slipway hurdle c/w curtain
1	4880mm dia forcing ring system c/w posts
2	Support post on base plate
24	Coupling rods
1	Curtain to suit slipway hurdle

**NB:** Sheep dip not included

**Code F051 2202 09**

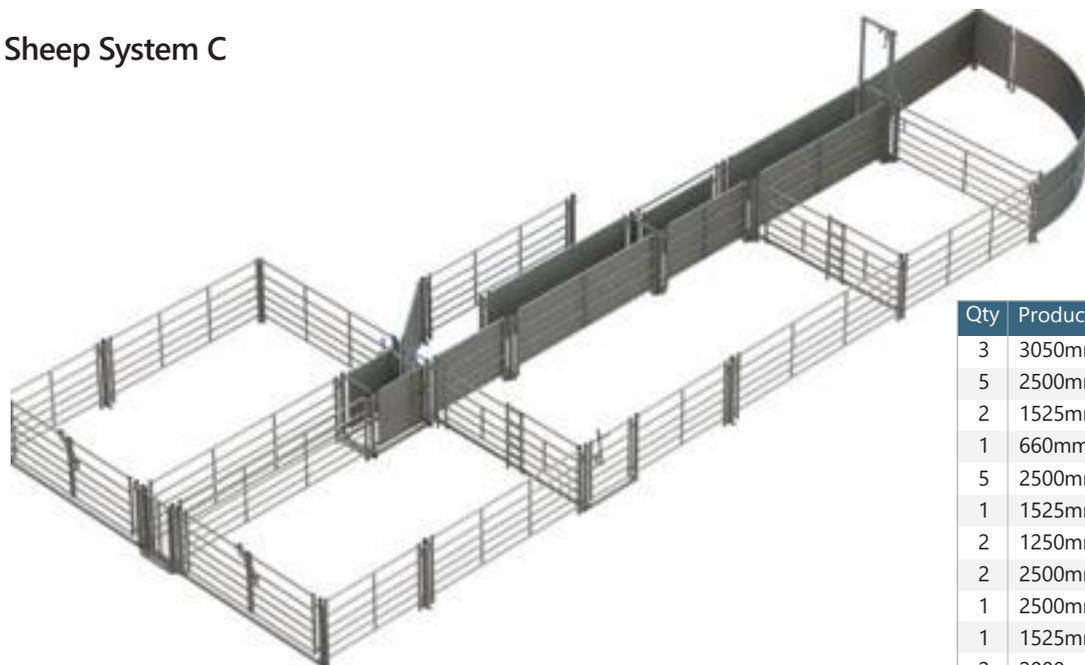

- Capable of holding between 80 and 100 breeding ewes (size dependent) at any one time
- Approximately 15500mm long by 5800mm wide
- 7800mm sheeted race includes a slipway section for use with a dipping bath (bath not included)
- Swing and slide gates extend the length of the race when in the closed position
- Easily operated sliding gates encourage animals to move between the individual holding pens (2500mm wide)
- When working with smaller animals (lambs) the race can be tapered
- Three-way drafting gate at the end of the race can sort animals into two dispersal pens or allow the animal to continue through the exit race
- Each dispersal pen is capable of holding between 15 and 20 breeding ewes (size dependent)

Qty	Product Description
3	3050mm 6 rail hurdle
5	2500mm 6 rail hurdle
2	1525mm 6 rail hurdle
1	660mm sheeted hurdle
5	2500mm 4 rail sheeted hurdle
1	1525mm 4 rail sheeted hurdle
2	1250mm 4 rail sheeted hurdle
2	2500mm pair of 6 rail gates in frame
1	2500mm 6 rail hurdle c/w swing gate
1	1525mm slipway hurdle
2	2000mm sheeted radius hurdle
2	Drop gate in frame
2	Race joiner
1	Guillotine gate c/w swing gate + pivot
2	2500mm sliding gate hurdle
1	2525mm swing and slide gate
5	2 way support post on base plate
1	3 way drafting/stop gate
43	Coupling rods

**NB:** Sheep dip not included

**Code** F051 2202 07

## Sheep System D



- Capable of holding between 40 and 60 breeding ewes (size dependent) at any one time
- Approximately 8600mm long by 4880mm wide
- A semi-circular forcing pen complete with a swing gate encourages animals to keep moving through the system
- Easily operated sliding gates encourage animals to move between the individual holding pens
- Comprises of 3 races: 915mm wide foot bathing race, a treatment race, narrow sorting race
- 3050mm x 915mm stand in foot bath included
- When working with smaller animals (lambs) the narrow sorting race can be tapered
- Further holding and dispersal pens can be added, or can be made from interlocking sheep hurdles (not included)

Qty	Product Description
1	3050mm x 915mm stand in footbath
2	3050mm 6 rail sheep hurdle
1	2500mm pair of rail gate in frame
1	Swing and slide gate
1	570mm wide guillotine gate
1	Guillotine gate and rope pulley kit
1	570mm 2 way drafting/stop gate
1	570mm wide race joiner
1	2500mm sliding gate hurdle
5	3050mm sheeted hurdle
3	1870mm radius hurdle sheeted
3	1750mm long dual rail gates in frame
1	76mm hang post c/w base plate pivot + lugs
2	Clamp on sheep lugs
3	3050mm sheeted shedding hurdle
1	1930mm radius x 1000mm 3 rail gate in frame
29	Coupling rods

**Code** F051 2202 10

## Sheep System D Plus (with extra penning)

Qty	Product Description
4	3050mm 6 rail sheep hurdle
4	2500mm sliding gate hurdle
34	Coupling rods

**Code** 1000349-01

## Circular Sheep Forcing Ring



- Create your own handling system using the Circular Sheep Forcing Ring as a base



Code	Product Description
F051 2200 12	3660mm dia c/w posts
F051 2200 16	4875mm dia c/w posts
F051 2201 12	3660mm dia c/w base plates
F051 2201 16	4875mm dia c/w base plates

## Economy Portable Sheep Race



- 4960mm race makes treating and sorting sheep an effortless task
- Hurdles stand at 905mm high
- Guillotine gate allows the operator to control the number of animals in the race at any one time
- Two-way drafting gate allows animals to be sorted at the end of the race
- Race joiner sits between the hurdles to prevent hurdles from splaying
- Additional hurdles can be attached via the drilled lugs


Qty	Product Description
2	2480mm R/H or L/H economy sheeted hurdles
1	Economy guillotine gate
1	Economy race joiner
1	Economy drafting stop gate

**NB:** The Economy units are stand alone products and therefore are not compatible with any items within the heavy duty range.

**Code** F050 2001 01



## 6 Rail Sheep Hurdle

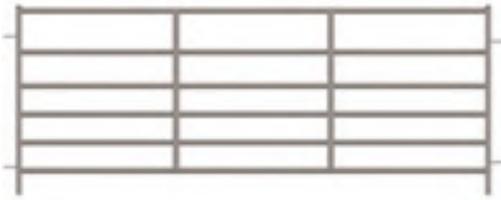

Code	Length (mm)	Height (mm)
F051 2800 12	1250	1000
F051 2800 15	1525	1000
F051 2800 17	1770	1000
F051 2800 25	2500	1000
F051 2800 30	3050	1000

## 4 Rail Fully Sheeted Sheep Hurdle



Code	Length (mm)	Height (mm)
F051 2900 06	660	1000
F051 2900 09	915	1000
F051 2900 12	1250	1000
F051 2900 15	1525	1000
F051 2900 17	1730	1000
F051 2900 25	2500	1000
F051 2900 30	3050	1000


## Fully Sheeted Sheep Shedding Hurdle



- Gate is opened via a top operated lever, allowing animals to be diverted into an adjacent pen
- Gate section can be hinged from either end, making it any hand use
- NB: Gate on the 1525mm hurdle is off-centre

Code	Length (mm)	Height (mm)
F051 2906 01	1525	1000
F051 2906 02	2500	1000
F051 2906 03	3010	1000


## 6 Rail Sheep Sliding Gate Hurdles

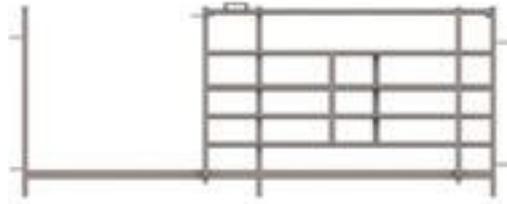

- Opening of slide section is 1205mm wide
- Opening section has no top rail to navigate under

Code	Length (mm)	Height (mm)
F051 2802 25	2500	1000
F051 2802 28	2820	1000
F051 2802 30	3050	1000

## 6 Rail Sheep Hurdle c/w Built in Gate

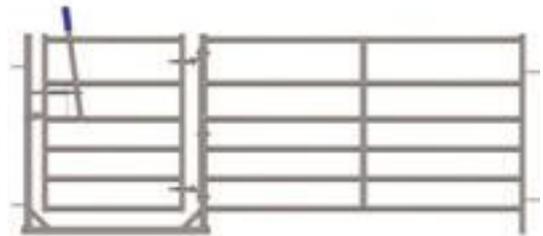

- Opening gate section is 835mm wide
- Gate has a top operated spring loaded slide bolt

Code	Length (mm)	Height (mm)
F051 2803 25	2500	1000

## Radiused Sheeted Hurdle



Code	Length (mm)	Height (mm)
F051 2901 15	1080	1000
F051 2901 20	2010	1000
F051 2901 17	1600	1000
F051 2901 18	1870	1000

## Fully Meshed Drafting/Stop Gate



- Designed to easily allow the operator to divert animals into two pens as they exit the race
- Quick acting operating handle for efficient drafting operation
- Handle will locate in an open position if a single direction of animals is required
- It is easily locked closed if being used as a stop gate
- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals

Code	Length (mm)	Width (mm)	Height (mm)
F051 2812 03	980	570	1000

## Three Way Drafting/Stop Gate



- Designed to allow the animal to either continue straight or be diverted into dispersal pens on either side
- Meshed stop gate is hinged and connected to a diverter gate
- Drilled base at either end allows for adjoining hurdles to be tapered if working with smaller animals

Code	Length (mm)	Width (mm)	Height (mm)
F051 2812 02	980	570	1000

## Lift & Swing Guillotine Gate c/w Pivot



- Supplied with pivot to suit swing and slide gate
- Main frame is full height both sides
- Internal height 1972mm
- Bases are drilled so that adjoining race hurdles can be tapered if required when working on lambs (570mm wide only)
- Pulley and nylon rope is included

Code	Width (mm)	Height (mm)
F051 2810 13	570	2063

## Lift and Swing Guillotine Gate



- Main frame is full height both sides
- Internal height 1972mm
- Bases are drilled so that adjoining race hurdles can be tapered if required when working on lambs (570mm wide only)
- Pulley and nylon rope is included

Code	Width (mm)	Height (mm)
F051 2810 14	570	2063
F051 2810 15	915	2063



## Drop Gate in Race Joining Frame




- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals
- 570mm wide

Code

F051 2814 06

## Sheep Sliding/Stop Gate in Race Frame

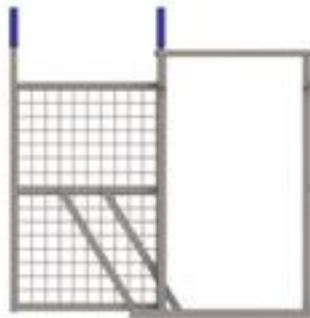

- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals
- Meshed gate slides positively in and out of position using a scissor action
- 570mm wide

Code

F051 2814 10

## Sheep Swinging Gates Built into a Frame



Code	Length (mm)	Height (mm)
F051 2805 06	610	1000
F051 2805 09	915	1000
F051 2805 12	1250	1000
F051 2805 15	1525	1000
F051 2905 15	Sheeted 1525	1000

## Gate in Race Joining Frame



- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals
- 570mm wide

Code

F051 2816 05

## Race Joining Frame



- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals
- Optional roller bar can be purchased to prevent backing up
- Bar can be fitted in 3 positions

Code	Product Description
F051 2813 06	915mm Race Joining Frame
F051 2813 08	*570mm Race Joining Frame
F051 2819 01	*Including back up roller bar fitted

## Non Return Gate in Race Joining Frame



- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals

Code

F051 2815 06

## Clip on Non Return Gates



- Clamps to 1000mm high IAE hurdles
- To suit 570mm race

Code

F051 2811 01

## Non Return/Stop Gate in Frame



- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals
- Gate can be locked open & closed (stop gate) and used as a non return gate
- 570mm wide x 270mm deep
- Comes with slotted lugs at each end

Code

F051 2815 10

## Self Locking Yoke in Race Frame



- Drilled base allows for adjoining hurdles to be tapered if working with smaller animals
- Yoke has 5 settings varying in width between 50mm and 130mm
- Yoke gates can be locked open when not in use
- Comes with slotted lugs at each end

Code

F051 2816 10

## Swing and Slide Gate



- Tried and tested unique gate with a curved top rail at each end to allow the gate to travel through a pivot wheel and behind the next batch of animals
- Enables sheep to be both sides of the gate without obstruction which in turn means full pens all of the time
- A slide bolt is built into the gate at each end

Code	Product Information
F051 2807 25	2555mm gate only
F051 2808 18	1690mm gate in frame
F051 2820 01	76mm hang post to suit - c/w pivot

## Fully Sheeted Slipway Hurdle



- Both sizes have 1525mm removable panel
- Used when animals are to be put into a dipping bath
- Hurdle can be replaced with curtain (extra cost)
- Lift out section has inverted hooks at each end
- Open section - 1500mm approx wide on both available sizes

Code	Product Information
F051 2907 15	1525mm plus removable panel
F051 2907 30	3050mm plus removable panel
F051 2907 01	Curtain only to suit slipway hurdle

## Pair of 6 Rail Sheep Gates



- Built into a frame
- Joined in the middle with a drop over frame
- Height - 1000mm, length - 2500mm

Code
F051 2804 25

## 2 Way Support Posts



Code	Product Information
F051 2820 02	On base plate
F051 2820 03	To go into ground
F051 2820 20	80 x 80 SHS 2 way support post goes into ground

## Fittings to Suit Sheep Equipment



Code	Product Information
F051 2825 12	Ground socket to suit 50 x 50 posts
B111 3010 63	Sheep lugs supplied loose
F051 2818 01	915mm long f/l hinge plate to suit hurdles
F051 2018 03	Coupling bar

## Sheep Footbath



- **NB:** Certain foot bathing products may cause the metal footbath to deteriorate in a short period of time. At an extra cost, plastic footbaths can be supplied however it does not fit our sheep footbath setup as above.

A complete metal stand-in footbath unit which includes a 6 rail swing gate in frame at one end and a mesh guillotine gate at the opposite end.

- The swing gate and guillotine gate sit outside of the footbath (floor standing) and are connected to the 6 rail side hurdles using slotted lugs and coupling bars
- For stability, the legs of the side hurdles locate into the four corners of the bath
- The base of the footbath is lined with expanded mesh which has been welded into place to encourage the hooves to open to maximise penetration of the foot bathing solution
- After each use, the footbath should be washed out, emptied and stood up on one end to prevent water and footbath solution from sitting in the bath when not in use

Code	Product Information
F051 2030 01	Metal stand in footbath complete Comprising of: 2 x F051 2800 30, 1 x F051 2805 09, 1 x F051 2810 15 1 x F051 2017 30, 4 x F051 2018 03
F051 2017 30	Metal footbath only 3050mm long x 915mm wide

## Sheep Docking Crate



### Key Features:

- 1350mm long x 560mm wide x 1000mm high
- Quick acting dual rear gates
- Self locking yoke with 5 variable width settings from 50mm to 130mm maximum
- Yoke can be locked open to allow clear passage
- Wheels and handles are available at an extra cost
- Drilled lugs allow the units to be incorporated into the heavy duty race system if required
- Opening side doors with top operated sliding bolt

Code	Product Description
F051 2817 10	Sheep Docking Crate
F051 2817 15	Wheels and Handles to suit

## Kwik Sheep Turnover Crate

The Kwik Sheep Turnover Crate has been designed for maximum usability, taking into account the needs of both the handler and the animal throughout the entire operation of this product.



### Key Features:

- Fully adjustable height and width to suit a wide variety of breeds and sizes of sheep
- Wheeled operation allows sheep to rotate on its own axis and so requires less effort from the operator
- Access to the rear of the animal can be gained via the back gate if required
- Wheels and handles are available at an extra cost
- Drilled lugs allow the units to be incorporated into the heavy duty race system if required
- Animal is presented with feet towards operator for ease of working

### Dimensions

1700mm long (1280mm internal)  
Maximum internal width 500mm  
Minimum internal width 330mm  
Maximum internal height 910mm  
Minimum internal height 700mm

Code	Product Description
1001130-01	Kwik Sheep Turnover Crate
F051 2300 03	Wheels and handles to suit

## Digital Lamb Weigher

The new and improved Lamb Weigher features a robust LCD crane scale with capabilities of weighing up to 300kg. To ensure the reliability of the reading, the animal is weighed upon two pivot arms, which enables an accurate weight of the animal to be calculated no matter where it is stood within the weigher.



### Key features:

- Quick acting twin entry and exit gates which are easy and smooth to operate
- Gates can be locked open or closed
- To aid animal flow into the weigher, it has been designed to provide the animal with
- excellent visibility around the crate
- Supplied with wheels and handles as standard, making it easy to move
- To protect the crane scale during transport a locking off handle should be applied
- Supplied with a fully galvanised tray for holding any relevant equipment
- External dimensions: 1264mm L x 545mm W x 1000mm H
- Internal dimensions: 1140mm L x 410mm W x 835mm H
- Entry level EID compatible Lamb Weigher is also available, which can be used with a Weigh Scale (sold separately)

Code	Product Description
1002587-01	Lamb Weigher c/w Crane Scale
1002588-01	EID Compatible Lamb Weigher

## OviHandler

New for 2025, the OviHandler from IAE is a revolutionary pneumatic sheep handling system designed to streamline operations, improve animal welfare, and boost on-farm efficiency.

Engineered with both the farmer and the flock in mind, the innovative pneumatic operation, allows for smooth, low-stress animal restraint at the touch of a button, reducing labour demands and improving animal welfare. This provides a stress-free solution for routine tasks such as weighing, dosing, tagging and much more.

Built from high-quality, durable materials, the OviHandler is easy to operate, portable, and compatible with an existing race system—making it an essential addition to any modern sheep enterprise.



### Key features:

- Quick-grip. A clamp style handler with pneumatic power, suitable for aiding in routine procedures such as worming, drenching, vaccinating and dagging
- Ergonomic design raises the sheep to a comfortable working height, with unparalleled access allowing you to handle large groups with ease
- Drafting gates on exit for sorting into groups
- Different width settings make the Ovihandler suitable for flocks of varying sizes. The width can be reduced when handling smaller or younger animals
- Integrated rechargeable battery for operation away from the homestead

Code
1006609-01



**Prattley**<sup>TM</sup>

Part of the **DATAMARS** Group.  
Exclusively distributed by



Originating from Temuka on the South Island of New Zealand, Prattley is a world leading manufacturer of livestock handling equipment. With a globally trusted reputation, Prattley offer robust, portable and durable solutions for livestock handling.

Owned by Datamars, Prattley products are exclusively distributed across the UK by IAE.

**8ft Intermediate Mobile Yard System**

CODE  
**920 0004-006**



- An entry level complete system
- Tow by ATV around the farm
- Use the pivot arms to raise and lower the system, allowing the wheels to be easily attached or removed
- Supplied with Drop-in Gate, Drafting Gate, Draw bar, Gate Support Arms and 16 No. 7' x 36" Gates

**7ft 3 Point Linkage Yard System**

CODE  
**920 0004-005**



- Easy to use Tractor Hitch Yard allowing 2 or 3 way drafting
- Easily transported, assembled and operated by one person
- Aluminium hurdles are lightweight yet robust and concertina for a quick setup.
- Includes 7ft drafting race, 10 No. 7' x 36" Gates, 2 No. L Posts

**10ft Standard Mobile Yard System**

CODE  
**920 0004-007**



- Capable of holding 250 ewes when used in conjunction with an existing fence-line
- Heavy duty winch system
- Suspension safety springs allow the winch to be backed off once loaded
- Aluminium hurdles are lightweight yet robust and concertina for a quick setup
- UK road legal system

**10ft Super Mobile Yard System**

CODE  
**920 0004-008**



- Capable of holding 500 ewes when used in conjunction with an existing fence-line
- Heavy duty winch system
- Suspension safety springs allow the winch to be backed off once loaded
- Aluminium hurdles are lightweight yet robust and concertina for a quick setup
- UK road legal system

**12ft Super Mobile Yard System**

CODE  
**920 0004-009**



- Capable of holding 750 ewes when used in conjunction with an existing fence-line
- 12ft durable race with ability to manually 3-way draft
- Heavy duty winch system
- Suspension safety springs allow the winch to be backed off once loaded
- Aluminium hurdles are lightweight yet robust

**14ft Mobile Yard System**

CODE  
**920 0004-012**



- Capable of holding 1500 ewes when used in conjunction with an existing fence-line
- 14ft durable race with ability to manually 3-way draft
- Heavy duty winch system
- Suspension safety springs allow the winch to be backed off once loaded,
- Aluminium hurdles are lightweight yet robust

### 3-Way Swing Gate Autodrafter Pneumatic

CODE 3-WAY
MOBILE (pictured)
880 0050-976
STATIONARY
920 0004-003



- Combined with an indicator and loadbars to automatically weigh and draft sheep based upon criteria
- Quiet pneumatic operation promotes good stock flow
- Capable of auto weighing approx. 600 sheep per hour
- Available as a stationary or mobile unit
- Also available as a 5-way drafting unit

### 3-Way Electric Autodrafter

CODE 3-WAY
880 0050-981
CODE 2-WAY
880 0050-971



- Combined with an indicator and loadbars to automatically weigh and draft sheep based upon a predefined criteria
- Suitable for manual drafting via remote
- Powered by a 12V battery allowing flexibility to use away from the homestead
- Also available as a 2-way drafting unit

### 3-Way Manual Drafter

CODE
920 0004-001-01



- Effortlessly weigh and sort sheep in 3 different directions
- Practical design keeps operator out of sheep's vision
- Gates move easily and quietly maximising stock flow
- Adjustable width to prevent smaller animals from turning
- Purchased as a left or right handed operation

### Standard Sheep Handler

CODE
920 0004-004



- Designed to mitigate the manual work associated with foot pairing and dagging
- Fully adjustable to suit any size ram, ewe or lamb
- Adjustable working height to the operators preference
- Full access to the rear and feet of the animal
- Supplied with an entry guide and panels to support good stock flow

### Buying Prattley Product in the UK

All Prattley products are available from IAE's extensive network of distributors throughout the United Kingdom.

### Prices

Our price list can be viewed by scanning the QR code which will scan to a full price list of every product.

All prices shown are RRP and exclusive of VAT



### Spare & Replacement Parts

A complete range of spare and replacement parts are available for the Prattley products distributed by IAE, scan the QR code to view the list of available parts:





**NEW PRODUCT**  
See Page 100





**Standard Sheep Circular Feeder**



- 25mm x 25mm SHS horizontal rails
- 20mm dia tube vertical rails at approx 328mm centres
- Comes in two sections joined by coupling bars
- 290mm high welded sheeted base

Code	Diameter (mm)	Height (mm)	Feed Spaces
F035 2000 33	1670	905	24

**Horned Sheep Circular Feeder**



- 25mm x 25mm SHS horizontal rails
- 20mm dia tube vertical rails
- Comes in two sections joined by coupling bars
- 290mm high welded sheeted base

Code	Diameter (mm)	Height (mm)
F035 2000 32	1670	905

**Diagonal Sheep Circular Feeder**



- 25mm x 25mm SHS horizontal rails
- 20mm dia tube diagonal rails at approx 210mm centres
- Comes in two sections joined by coupling bars
- 290mm high welded sheeted base

Code	Diameter (mm)	Height (mm)	Feed Spaces
F035 2000 35	1830	905	26



## Sheep Round Bale Feeder



- 30mm x 30mm SHS horizontal rails
- 30mm dia tube vertical rails at approx 220mm centres

Code	Length (mm)	Width (mm)	Height (mm)
F035 2004 04	1630	1525	1000

## Sheep Feed Cradle



- 40mm x 40mm angle frame
- 25mm x 25mm SHS vertical rack bars at approx 210mm centres
- 25mm dia tube fixed end vertical rails at 200mm approx centres
- Hinged gate at one end for ease of filling
- Supplied flat packed

Code	Length (mm)	Width (mm)	Height (mm)
F035 2004 01	1645	1532	1000

## Sheep Square Bale Feeder



- Width narrows to 939mm minimum
- 250mm timber board to form skirting
- 30mm x 20mm RHS framework
- 20mm dia tube vertical rails

Code	Length (mm)	Width (mm)	Height (mm)
F035 2003 01	1630	1525	915

## Corrugated Lid for Sheep Feed Cradle



- Internal width between support legs 1560mm
- Supplied flat packed

Code	Width (mm)	Height(mm)	Depth (mm)
F035 2004 03	1991	1240	1840

## Vertical Rail Rectangular Sheep Feeder



- Two corners bolted together
- Two corners connected with coupling bars
- 290mm high welded sheeted base
- 25mm x 25mm SHS horizontal rails
- 20mm dia tube at 200mm approx centres
- Supplied flat packed

Code	Length (mm)	Width (mm)	Height (mm)	Feed Spaces
F035 2008 01	2250	1625	905	38



## Double Sided Lamb Creep Feeder



- 728mm wide lid
- Fitted with Protex fastenings and lid catch
- Supplied with four 254mm x 25mm rubber bore tyre wheels

Code	Length (mm)	Width (mm)	Height (mm)	Capacity (L)	Feed Spaces
F035 2001 08	1250	460	650	117	12
F035 2001 07	2440	460	650	234	24



## DSLFC Trailed Kit



- Move your Double Sided Lamb Creep Feeder (DSLCF) from field to field effortlessly, by adding our Trailed Kit
- Purchase new DSLCF with the Trailed Kit, or buy it as a stand-alone product to easily retrofit to your existing feeder
- Heavy duty design delivers the strength and durability for on-farm movement
- Standard pressed hitch coupling
- Available for the 1220mm and 2440mm DSLCFs

Code	Product Description
1006482-01	1220L Trailed Kit Bundle
F051 2300 03	2440L Trailed Kit Bundle

## Single Side Lamb Creep Shelter



- Features full length adjustable creep aperture
- Removable feed hopper
- Supplied with four 254mm x 25mm rubber bore tyre wheels

Code	Length (mm)	Width (mm)	Height (mm)	Capacity (L)
F035 2001 04	1200	1200	900	128
F035 2001 01	2440	1200	900	256

## Hook Over Hayrack



- 75mm x 75mm weldmesh and sheeted end panels
- Hook brackets welded on
- Suitable for calves or sheep

Code	Length (mm)	Width (mm)	Height (mm)	Depth (mm)
F035 2009 04	915	400	240	420
F035 2009 01	1250	400	240	420
F035 2009 02	1835	400	240	420



## Sheep Hayrack on Wheels



- Double sided 75mm x 75mm weld mesh hayrack
- Comes with Protex fastening and lid catch
- Supplied with four 254mm x 25mm rubber bore tyre wheels

Code	Length (mm)	Width (mm)	Height (mm)
F035 2002 05	1250	600	813
F035 2002 06	2440	600	813
B152 1301 00	Replacement wheel to suit		



## Standard Sheep Feed Trough



Code	Length (mm)	Width(mm)	Depth (mm)
F035 2005 21	915	284	123
F035 2005 24	2745	284	123

## Hook Over Sheep Feed Trough



- Hook brackets supplied loose for ease of carriage/storage

Code	Length (mm)	Width(mm)	Depth (mm)
F035 2006 31	915	284	123
F035 2006 32	1370	284	123
F035 2006 33	1830	284	123
F035 2006 34	2745	284	123



This equipment is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that food safe or non-toxic epoxy is applied to areas of the product which will be in contact with silage, feed or water before use, and then periodically thereafter when it is empty, clean and dry in order to prevent corrosion of the steel and zinc and therefore extend the life of the equipment. See p.130 for further information



# WATER TROUGHS

## 457mm Cattle Water Trough



Includes a drain plug and bung as standard

Code	Length (mm)	Width (mm)	Depth (mm)	Capacity (L)
F020 2001 02	600	457	405	109
F020 2001 03	900	457	405	163
F020 2001 04	1200	457	405	218
F020 2001 05	1800	457	405	272
F020 2001 06	1500	457	405	327
F020 2001 08	2400	457	405	436
F020 2007 11	Loose service box to suit above			
	Welded in service box			

## 610mm Cattle Water Trough



Code	Length (mm)	Width (mm)	Depth (mm)	Capacity (L)
F020 2002 04	1200	610	610	454
F020 2002 06	1800	610	610	681
F020 2002 08	2400	610	610	908
F020 2002 10	3000	610	610	1135
F020 2007 11	Loose service box to suit above			

## 1200mm Large Capacity Water Trough



Code	Length (mm)	Width (mm)	Depth (mm)	Capacity (L)
F020 2005 10	3050	1200	610	2270

Includes integral service box

Includes a drain plug and bung as standard

## Service Box



- Tapered sides to prevent ball valve drop out (when using a 115mm float)
- Suits 20mm and 25mm ball valves
- Supplied with 3 sets of mounting brackets
- Compliant with WRAS water supply regulations

Code	Product Description
F020 2007 11	Service Box

## 457mm Sheep Water Trough



Includes a drain plug and bung as standard

Code	Length (mm)	Width (mm)	Depth (mm)	Capacity (L)
F020 2003 04	1200	457	267	136
F020 2003 06	1800	457	267	204
F020 2007 11	Loose service box to suit			
	Welded in service box			

## 730mm High Backed Water Trough



Includes a drain plug and bung as standard

Code	Length (mm)	Width (mm)	Depth (mm)	Capacity (L)
F020 2004 03	900	230	610	48
F020 2004 04	1200	230	610	64
F020 2004 06	1800	230	610	95
F020 2007 03	Loose service box to suit			



- Stainless steel design withstands harsh and corrosive environments for a long-lasting product
- A hygienic and easy to clean solution for providing cattle with fresh drinking water
- Quick empty design, using an 89mm drain, efficiently empties the trough
- Available as a free standing or bolt to wall unit, in two lengths: 2022mm (159L) or 3102mm (238L)



Quick Empty Water Troughs now available in a choice of Hot Dip Galvanised or Stainless Steel

## Free Standing Quick Empty Water Trough

## Wall Mounted Quick Empty Water Trough



Free standing:


Code	Finish	Length (mm)	Width (mm)	Height (mm)	Capacity (L)
1004576-01	Stainless Steel	2022	622	950	159
1004578-01	Stainless Steel	3102	622	950	238
F020 2015 06	Hot Dip Galv.	2022	622	950	159
F020 2015 08	Hot Dip Galv.	3102	622	950	238

Wall mounted:

Code	Finish	Length (mm)	Width (mm)	Height (mm)	Capacity (L)
1004580-01	Stainless Steel	2022	622	950	159
1004582-01	Stainless Steel	3102	622	950	238
F020 2015 02	Hot Dip Galv.	2022	622	950	159
F020 2015 04	Hot Dip Galv.	3102	622	950	238



## Water Pipe Fittings Kits Quick Empty/Tipping Water Troughs

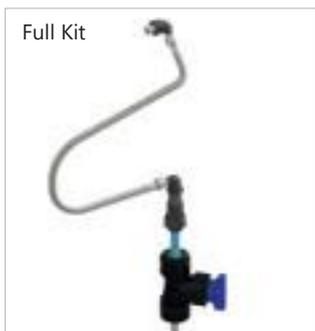

- Half kit is designed to fit from the service box to the pipe fixing bracket located next to the pivot of the trough (customer to provide own fittings after this point)
- Full kit is designed to fit from the service box through to the inlet water pipe. This kit fits both 25mm and 32mm inlet pipes

Code	Product Information
F020 2009 58	Half water pipe fitting kit
F020 2009 59	Full water pipe fitting kit

### Universal Drinkers

#### Single Sided

- 9.87L capacity
- Supplied with ball valve



Code	Length (mm)	Wide (mm)
1001030-01	370	380



#### Double Sided

- 9.87L capacity per side
- Supplied with ball valve



Code	Length (mm)	Wide (mm)
F020 2020 05	570	380



### Universal Brackets

#### Single Sided

- Supplied with fittings to attach Universal Drinker.



Code	Length (mm)	Wide (mm)
1002702-01	490	640



Wall/post/stanchion fittings not supplied.

#### Double Sided

- Supplied with fittings to attach Universal Drinker.



Code	Length (mm)	Wide (mm)
1002703-01	800	640



Wall/post/stanchion fittings not supplied.

### Self Fill Water Bowls

#### Standard Pressed Bowl

- 2.54L Capacity



Code
B165 0001 01



#### Heavy Duty Cast Bowl

- 2.84L Capacity



Code
B165 0500 75




## VisorDrink®

VisorDrink® is the latest concept from IAE in drinkers for beef cattle. Featuring a super tough all-in-one trough and shroud design, the VisorDrink also features a built in visor to protect the drinking water from muck and straw.

Featuring a built in high flow float valve capable of handling a high pressure supply, the VisorDrink ensures a ready supply of drinking water for your herd. Available in 3 lengths, there's a VisorDrink to suit any building, pen and application. Water is easily accessed by nudging the hinged visor and the sturdy body prevents access from the bedded area with no additional shroud or cover required.

A large diameter quick empty valve enables quick drainage and cleaning, and the high flow float valve ensures a ready supply of fresh water. Telescopic mounting to post brackets fits a variety of gaps.

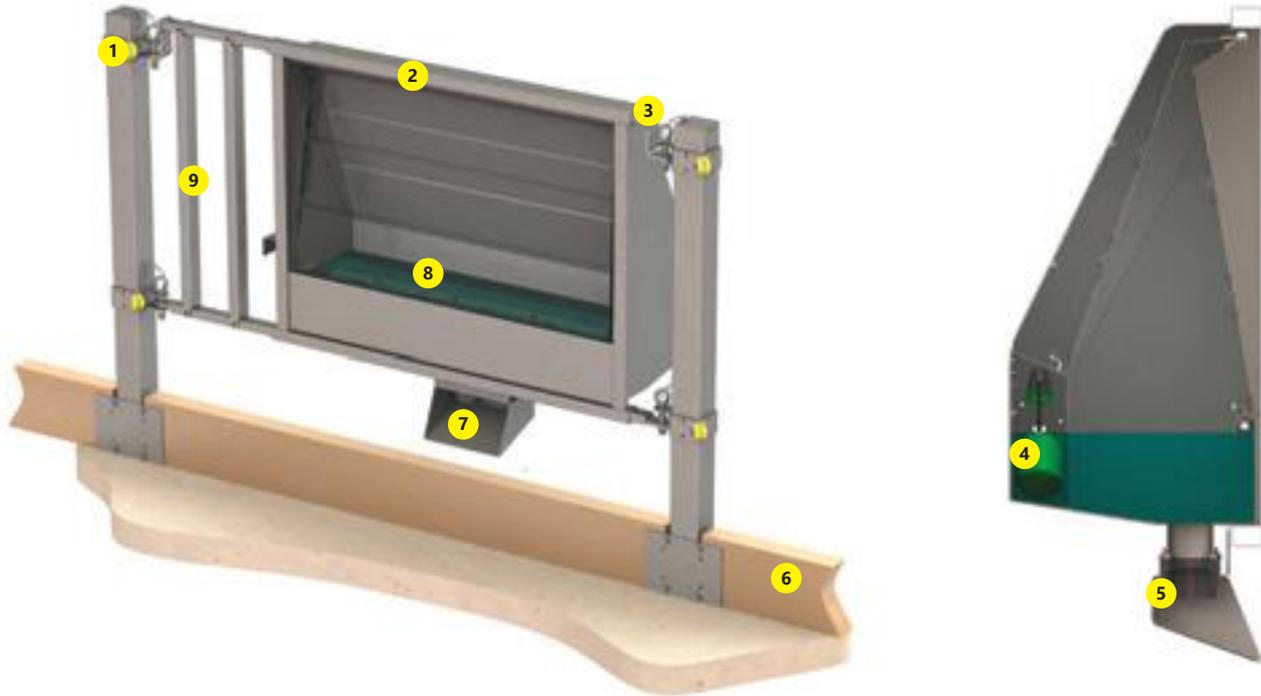

1. Drinker is post mounted, using AG-fit hang brackets and telescopic bracket
2. Visor can be temporarily held back using peg/bolt (not supplied)
3. Telescopic mounting allow for a variety of post centre mountings, minimising the number of posts required in some instances
4. Designed for use with a high flow float valve, ensuring quick filling and a constant supply of drinking water and can accept high pressure supply. Valve can be left hand or right hand to suit water supply position
5. Large diameter tube 89mm quick empty valve allows swift and easy emptying and cleaning of the trough. The release handle is protected and obscured from curious animals
6. 75 x 225mm timber boards (supplied by others) can be used to hold back bedding. Use bolt on brackets
7. Chute ensures emptied water exits into the scrape passage and not on the bedded area
8. Light but tough visor on the front of the drinker is easily nudged by animals to access water. Protects water supply from muck and straw
9. Optional bolt on vertical infillers mitigate head traps where extended telescopic brackets are used

### VisorDrink® - 1955mm



#### Specification

Construction	Heavy Duty Welded Sheet
Dimensions	1955W x 1220H x 470D
Inlet	Overall dia 27mm
Outlet	Overall dia 89mm
Capacity	129L
Post Clearance	Std: 2265-2385mm Ext: 2390-2870mm

Code  
1001027-01



### VisorDrink® - 1345mm



#### Specification

Construction	Heavy Duty Welded Sheet
Dimensions	1345W x 1220H x 470D
Inlet	Overall dia 27mm
Outlet	Overall dia 89mm
Capacity	86L
Post Clearance	Std: 1655-1775mm Ext: 1780-2260mm

Code  
1001026-01



### VisorDrink® - 735mm



#### Specification

Construction	Heavy Duty Welded Sheet
Dimensions	735W x 1220H x 470D
Inlet	Overall dia 27mm
Outlet	Overall dia 89mm
Capacity	43L
Post Clearance	Std: 1045-1165mm Ext: 1170-1650mm

Code  
1001025-01







# HAYRACKS AND TROUGHES

## Hook Over Calf/Sheep Hayracks



- 75mm x 75mm weld mesh and sheeted end panels
- Hook brackets welded on

Code	Length (mm)	Width (mm)	Height (mm)	Depth (mm)
F035 2009 04	915	400	240	420
F035 2009 01	1250	400	240	420
F035 2009 02	1835	400	240	420

## Wall Fitting Calf/Cattle Hayracks



- 75mm x 75mm weld mesh
- Can be fitted with hooks at additional cost

Code	Length (mm)	Width (mm)	Depth (mm)	Height (mm)
F032 2002 06	1835	455	585	610
F032 2002 08	2440	455	585	610


## Double Sided Mesh Haybasket



- Slots over division panels
- Suitable for calf pens and lambing pens

Code	Length (mm)	Width (mm)	Depth (mm)
B107 0170 20	475	475	490

## Hook Over Cattle Hayracks

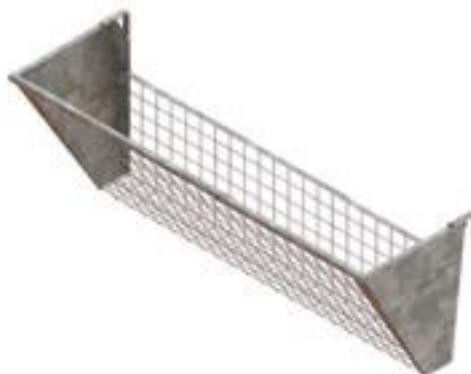

- 75mm x 75mm weld mesh
- Sheet metal end panel
- Hook brackets welded on

Code	Length (mm)	Width (mm)	Height (mm)	Depth (mm)
F030 2033 02	2440	540	460	675



## Wall Fitting Calf Trough



- 1.5mm thick galvanised steel
- Ideal for use in calf creep pens
- Fixing bolts are not included
- This product is made to order

Code	Length (mm)	Width (mm)	Depth (mm)
F030 2070 06	1830	284	123
F030 2070 08	2440	284	123

## Hook Over Calf/Sheep Trough



- 1.5mm thick galvanised steel
- Ideal for hanging on gates
- Hooks are welded onto the trough

Code	Length (mm)	Width (mm)	Depth (mm)
F035 2006 31	915	305	150
F035 2006 32	1370	305	150
F035 2006 33	1830	305	150
F035 2006 34	2745	305	150

## Verti - Rack



A modular system allowing varying lengths of hayrack to be easily achieved using standard sections.

- Can be configured to be a hook over hayrack
- Can be configured to be a bolt to wall unit
- Comes with meshed back panel
- Vertical rails set at 77mm apart from the front section
- Allows feeding from all three sides
- Supplied flat packed some self assembly is required
- Fittings to bolt product together are included but fittings to attach to the wall are not supplied
- This product is made to order

Code	Length (mm)	Product Description
F030 2034 11	915	Hook Over (single section & back panel)
F030 2034 12	1830	Hook Over (single section & back panel)
F030 2034 13	2745	Hook Over (two sections & back panels)
F030 2034 14	3660	Hook Over (two sections & back panels)
F030 2034 01	915	Bolt to Wall (single section)
F030 2034 02	1830	Bolt to Wall (single section)
F030 2034 03	2745	Bolt to Wall (two sections)
F030 2034 04	3660	Bolt to Wall (two sections)

## Calf Feeder



- Hook on unit
- C/w a visor flap to prevent muck and straw contamination
- Feed height is adjustable through two positions
- Adjustable flow control
- 2mm pre-galvanised steel body

Code	Length (mm)	Width (mm)	Capacity (L)
F055 2040 01	1280	415	240





**NEW PRODUCT**  
See Page 118






### Posts


We offer a range of hanging and slamming posts to suit all of our gates, available in either tubular or square section.

### Ashbourne - 7 Rail

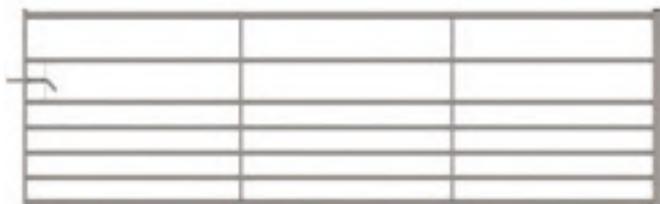

- 1143mm high
- Box section RHS bracing for improved strength
- Top and bottom rails 43mm dia tube
- Intermediate rails 29mm dia tube
- Spring loaded sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Available from stock in a full range of sizes between 610mm and 4880mm
- Bespoke sizes available at extra cost

### Big Bar - 7 Rail

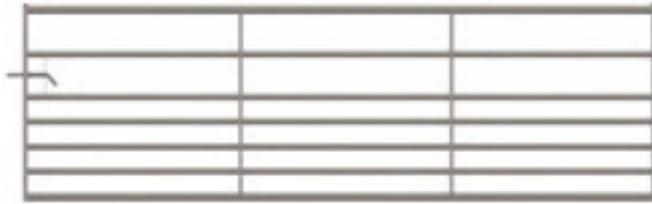

- 1143mm high
- Box section RHS bracing for improved strength
- Top and bottom rails 44.5mm dia tube
- Intermediate rails 35mm dia tube
- Spring loaded sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Available from stock in a full range of sizes between 610mm and 4880mm
- Bespoke sizes available at extra cost


### 5 Rail Half Meshed



- 1143mm high
- Top and bottom rails 44.5mm dia tube
- Intermediate rails 30mm dia tube
- Spring loaded sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Clad with 75mm x 75mm mesh to a height of 670mm
- Available from stock in a full range of sizes between 610mm and 4880mm
- Bespoke sizes available at extra cost




## 4 Rail Fully Mesh

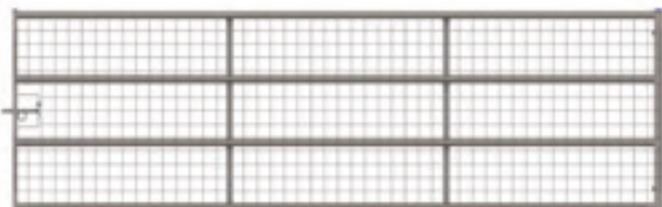

- 1143mm high
- All horizontal rails 44.5mm dia tube
- Keyhole/pendulum sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Clad with 75mm x 75mm mesh

## 5 Rail Cattleyard

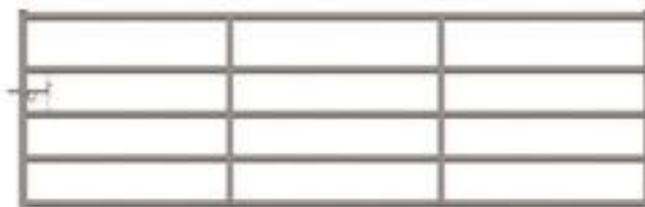

- 1143mm high
- Top and bottom rails 48.3mm dia tube
- Intermediate rails 44.5mm dia tube
- Keyhole/pendulum sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Available in a full range of sizes between 610mm and 6100mm
- Bespoke sizes available at extra cost

## 6 Rail New Forde



- 1143mm high
- Top and bottom rails 48.3mm dia tube
- Intermediate rails 38mm dia tube
- Keyhole/pendulum sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Available in a full range of sizes between 610mm and 6100mm
- Bespoke sizes available at extra cost

## 8 Rail Premier




- 1525mm high
- All horizontal rails 44.5mm dia tube
- Spring loaded sliding bolt fastening
- Double braced for increased strength
- 50mm x 50mm SHS sleeved hanging stile
- Available in a full range of sizes between 610mm and 4880mm
- Bespoke sizes available at extra cost

## Barrier Gate



- 762mm high
- Suitable for closing off vehicular access
- Padlockable sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Available from stock in a full range of sizes between 3660mm and 6710mm
- Bespoke sizes available at extra cost
- Hang and slam posts can be purchased at an extra cost

## Deer Gate - Fully Meshed

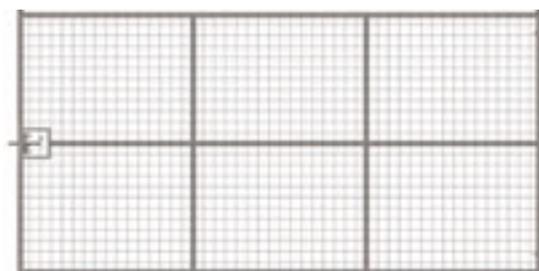

- 1860mm high
- Central sliding bolt makes the gate anyhand
- 40mm x 40mm SHS Frame
- Padlockable sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Clad with 75mm x 75mm mesh
- Available from stock in 3 sizes: 1220mm, 3050mm and 3660mm
- Bespoke sizes available at extra cost
- Hang and slam posts designed to suit any size deer gate can be purchased at extra cost





### Buxton Sheeted Doors



- 1270mm high
- Keyhole/pendulum sliding bolt fastening
- 50mm x 50mm SHS frame outer
- 50mm x 30mm infills
- Clad with 1mm pre-galvanised sheet
- Bespoke lug hinges and slam plates can be supplied at extra cost for fastening outside of RSJ
- Extended lug hinges and slam plates can be supplied at extra cost for fastening inside of RSJ
- Available from stock in 3 sizes: 3050mm, 3660mm and 4575mm
- Bespoke heights and lengths available at extra cost

### Sliding Doors



- Suitable for use at the end of buildings where swing doors are not a viable option
- Sliding sheeted doors can be purchased on a made to order basis
- Bespoke sizes available
- All required fixings and tracking gear can be purchased at extra cost
- Weather hooding (as shown in the image) can be purchased at extra cost to increase the longevity of the tracking

### Cattle Grids



- A great option for replacing gated vehicle access with a drive-through option
- Suitable for containing all types of stock including cattle, deer, sheep and goats within the field boundary
- Fully galvanised to increase longevity
- Available in a range of sizes which are suited to different weight bearing applications
- Installation details are supplied prior to the despatch of any cattle grid

Code	Product Information
F080 2010 10	10 Tonne Capacity
F080 2010 20	20 Tonne Capacity
F080 2010 30	30 Tonne Capacity
F080 2010 40	40 Tonne Capacity

**NB:** The stated capacities rely on correctly installed and positioned support walls.



## Continental Gates And Panels


Designed specifically for livestock handling and penning requirements, the Continental range of heavy-duty gates and panels are available to purchase in a choice of height and rail numbers to suit a variety of applications. They can be used in conjunction with our extensive range of hang and slam post options to provide you with the best solution for your penning and handling requirements.

- Available as a gate or fixed panel
- 50mm x 50mm SHS sleeved hanging stile
- Top and bottom rails 48.3mm dia tube
- Keyhole/pendulum sliding bolt fastening (gates)
- Calf creep aperture available to purchase at extra cost


To aid your decision, our guide below indicates typical applications of various continental panels and gates:

Rail No.	Height (mm)	Hang Height (mm)	Typical Use
3	995	1525	Housing dairy cattle
4	1135	1525	Penning bull beef, cattle housing where extra ground clearance is required
5	1270	1525	General purpose stockyard and handling facilities
6	1575	1830	Holding pens where extra height is required
7	1880	2130	Multi purpose cattle/sheep/calf - includes 3 x 33.7mm dia rails

## 5 Rail Continental and Panel

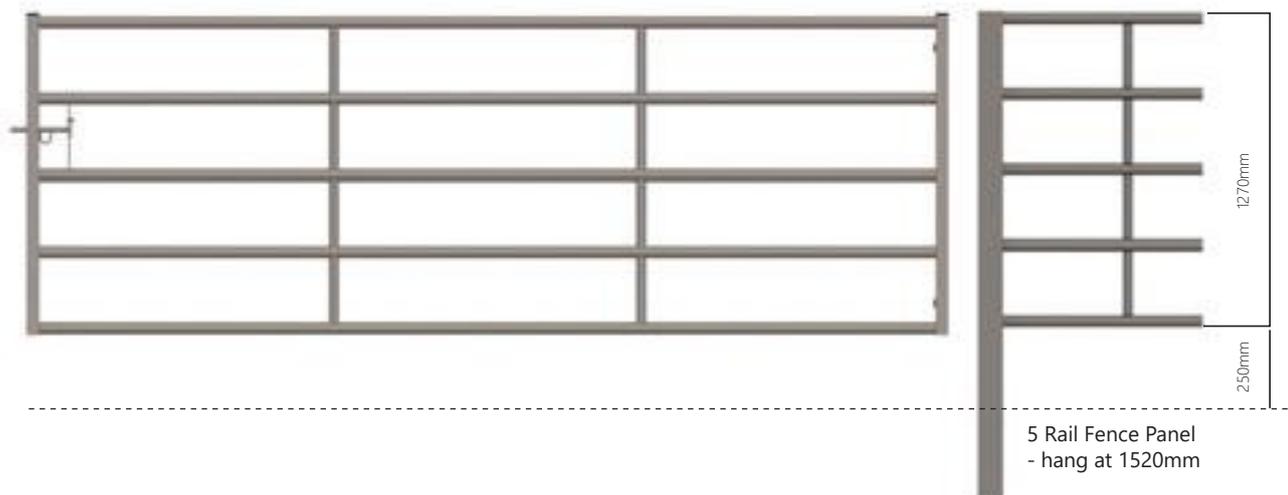

## Wheeled Cattle Hurdle

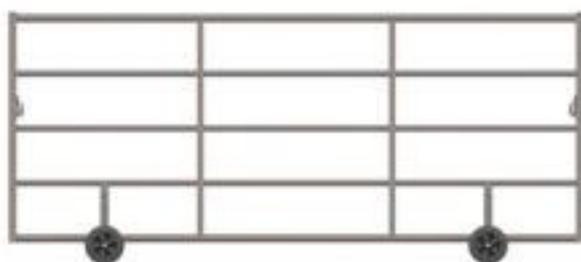

- 1605mm high
- Suitable for use as a barrier across open gaps when moving cattle
- Supplied with 4 durable rubber wheels for ease of movement across yards
- Includes hook and chain fastening
- Available in two sizes: 3660mm and 4570mm



## The ATV FieldLink

Improve on farm efficiency with our FIELDLINK, designed to eradicate the need for the continuous opening and closing of gates whilst keeping livestock in their desired fields.



### Suitable for:

- Permanent use alongside an existing gateway
- Positioning in the boundary fence of two fields
- Temporary use in gateways during periods of high activity
- Use in strip grazing systems. Pre fabricated holes allow you to join insulators and fencing wire to the unit frame

### Key features:

- The arched design raises the unit to 300mm from ground level, deterring stock from crossing the FieldLink
- Meshed side panels and rails to a height of 1250mm prevent livestock from entering the FieldLink from the side
- Designed to hold a 1830mm meshed gate if required during prolonged times of limited use
- Fully galvanised to increase the longevity of the product
- Supplied in kit form for onsite assembly



Code

1005501-01



Established in 1990, Centrewire is the UK's leading supplier of specialist gates designed specifically for Rights of Way. Our well established and ever evolving process of designing and developing new products enables us to continually meet the changing demands of each and every user group who chooses to access the Countryside. For a full list of Centrewire products, please scan the QR code.



SCAN FOR PRICE LIST

## Denstone 2-Way

The Denstone gate is a two-way timber gate leaf set in a galvanised steel H-frame. The hybrid design of both timber and galvanised steel makes the Denstone gate aesthetically pleasing and durable at the same time.

Code	Gate Leaf (mm)
F010 2000 00	1200
F010 2000 00	1600



## Chiltern 2 & 1-Way Gates Mk2

The Chiltern gate is a two or one-way galvanised mesh gate leaf set in a galvanised steel H-frame. Based upon the bestselling previous Chiltern gate, the new design meets the requirements of today's pedestrians, equestrians and users of mobility vehicles.

Code	Product type
F010 2003 04	2-way
1000875 01	1-way



## York 2-in-1 Combination Gate

The York 2-in-1 gate is designed to allow vehicles and pedestrians access to a right of way by utilising two galvanised gates. The larger of the two gates can be locked to prevent vehicular access when not required, whilst the bridle gate remains accessible to pedestrians, equestrians and mobility users.

Code	1-way Gate Leaf	Code	2-way Gate Leaf	Code	Posts (mm dia)
F010 2040 20	3000	F010 2042 20	3000	F010 2075 10	Hang - 139
F010 2040 21	3600	F010 2042 21	3600	F010 2080 52	2w Slam - 100
F010 2040 22	4200	F010 2042 22	4200	F010 2080 53	1w Slam - 100
F010 2040 23	4800	F010 2042 23	4800	F010 0101 24	Timber 175

## Oxford Kissing Gate Range

The Oxford range of kissing gates are constructed from timber to ensure they blend well into any countryside environment. Comprising of timber posts and rails as well as a timber gate, the Oxford kissing gate is available in three sizes: Large Mobility, Medium Mobility and Pedestrian.

Code	Product type
F010 0113 01	Pedestrian
F010 0113 02	Medium
F010 0113 03	Large






### Department of Transport Gates

IAE manufacture the full range of DOT gates to the highways specification details H17, H18, H19 and H20. All of our DOT gates are supplied with a hang and slam post.

H17-6 Rail



H18-Single Leaf Mesh Gate

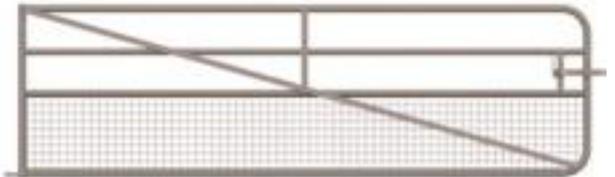

H19-6 Rail



H20-6 Rail



**NB:** The H20 can only be purchased as a pair


### Kissing Gate



- Height -1100mm - 1200mm, maximum in the fenceline 1700mm, width across the hoops 1200mm, gate dimensions 1000mm high x 700mm wide
- H-Frame provides rigidity and ease of installation
- The gate self closes and latches automatically, developed for where space is limited

Code
F010 0216 08



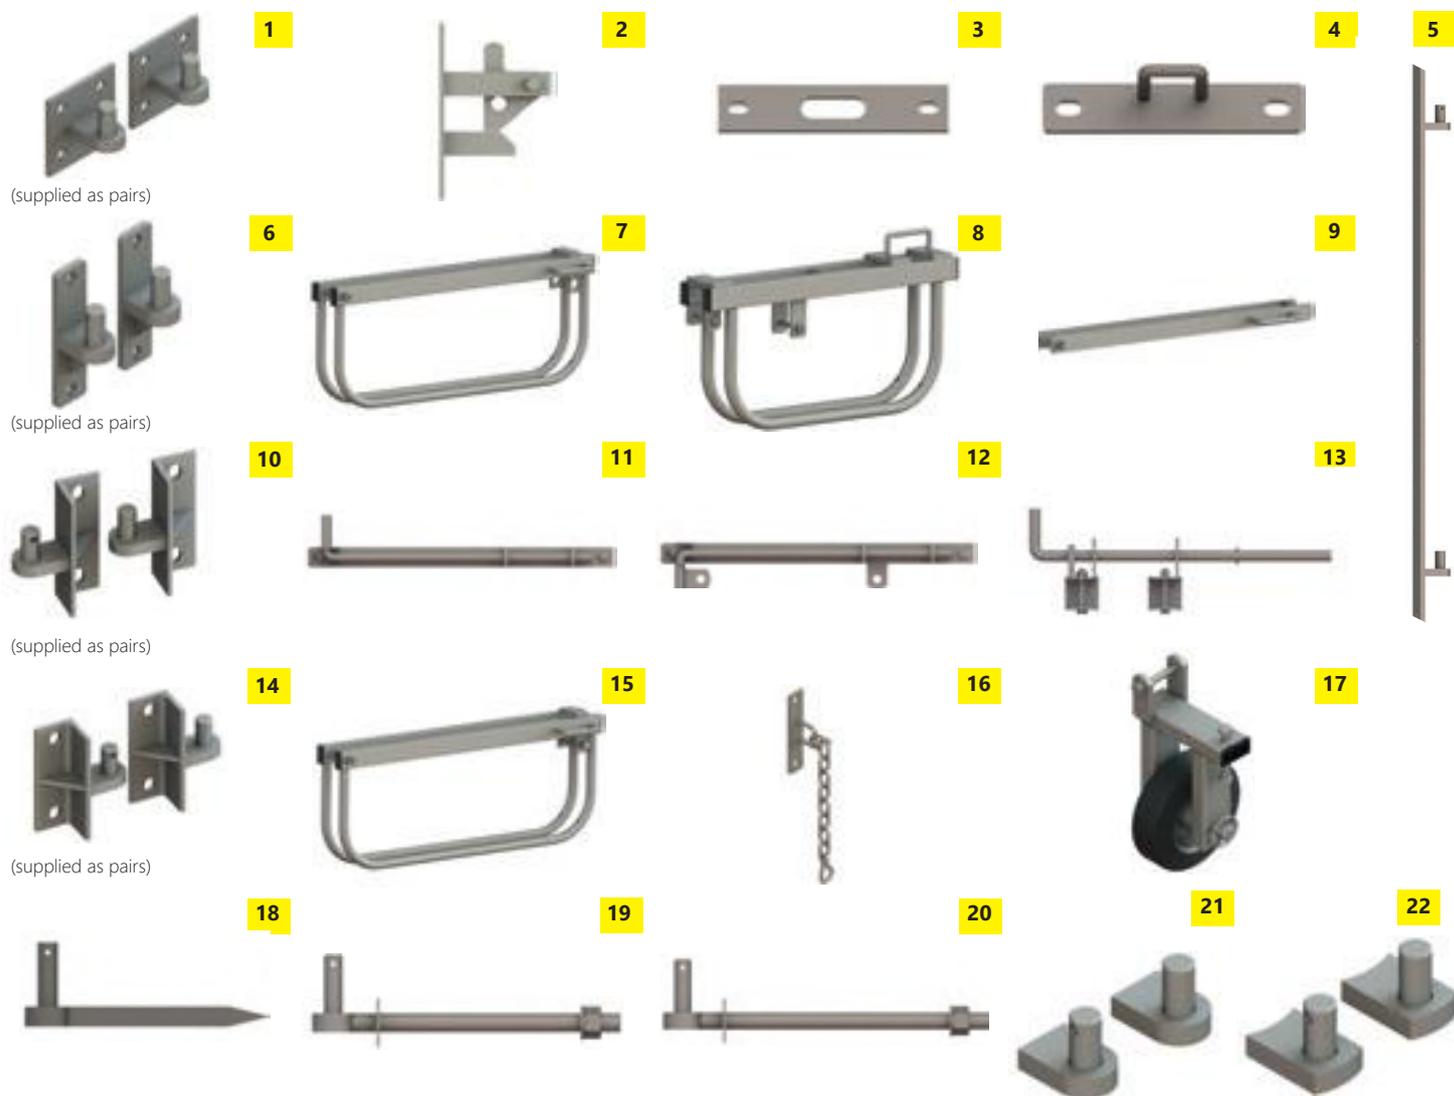

	Code	Product Information
1.	F016 0311 20	Hinge hooks on square drilled plates-20mm dia
	F016 0311 25	Hinge hooks on square drilled plates-25mm dia
2.	B106 0060 00	D latch socket on drilled plate
3.	F016 2003 02	Slotted plate bolt receiver
4.	F016 2003 01	Loop bolt receiver on drilled plate
5.		Hinged hooks on full length drilled vertical plate
6.	F016 0010 20	Hinged hooks on vertical drilled plates-20mm dia
	F016 0310 25	Hinged hooks on vertical drilled plates-25mm dia
7.	F016 2001 02	Heavy duty drop over frame
8.	F016 2001 03	Sliding type gate frame
9.	F016 2001 01	Simple drop over frame
10.	F016 0317 20	Hinge hooks on L/hand angle drilled plates 20mm dia
	F016 0317 25	Hinge hooks on L/hand angle drilled plates 25mm dia
11.	F016 2002 01	Bolt on drop bolt-to suit 50mm x 50mm or 40mm x 40mm stiles
12.	F016 2002 03	Bolt on padlockable drop bolt- to suit 50mm x 50mm stiles
13.	F016 2002 02	Clamp on drop bolt - to suit 50mm x 25mm stiles
14.	F016 0315 20	Hinged hooks on R/hand angle drilled plates-20mm dia
	F016 0315 25	Hinged hooks on R/hand angle drilled plates-25mm dia
15.	F016 2001 20	Padlockable heavy duty drop over frame - c/w peg
16.	F016 2003 03	Hold back chain assembly
17.	F016 2006 01	Bolt on wheel
18.	B107 0420 00	Hook to Drive - 20mm dia
19.	B107 0320 10	20mm H/hook on 20mm shank (to suit 200mm thick wall/post)
20.	F016 2038 12	20mm H/hook on 20mm shank (to suit 250mm thick wall/post)
21.	F016 2538 10	Hinge hooks to weld - flat back self colour-25mm dia
22.	F016 2038 12	Hinge hooks to weld - radius back self colour-20mm dia



## Post Drivers



Code	Product Information
F017 2101 04	114mm dia
F017 2101 06	165mm dia

## Mesh Fencing

Our Fencing Division offers a wide range of mesh security fencing that is suitable for a variety of applications including the perimeter fencing of slurry lagoons.

Our most cost effective perimeter mesh fencing system is the Vmex® V3. Designed to be a subtle solution that still provides a good level of security, the Vmex V3 consists of weld mesh panels with longitudinal profiles which are manufactured from 5mm horizontal and 4mm vertical wires to give 200 x 50mm maximum wire spacing. If a higher level of security is required, please do not hesitate to contact our Fencing Sales team, as we are available to offer many alternatives, all with varied levels of security.

### Key features:

- Available from stock
- Available in a range of heights between 1200mm and 3000mm
- Supplied with posts
- Galvanised and polyester powder coated to BS 1722 Pt. 16
- Supplied with required post fixings
- Choice of RAL finish colours available
- Matching gates available to purchase at additional cost




## Estate Fencing

Estate fencing has existed for many years and can be dated back to the Victorian age, where it was a common fencing solution on large country estates. Nowadays, this classic, stylish type of fencing has a much wider variety of applications and can frequently be found in parkland, urban, rural and farmland settings. The robust design of the fencing has the strength to contain a variety of livestock, including cattle, whilst the continuous 5 rail system contains smaller livestock. If a subtle fencing solution is required, estate fencing is perfect as it is visually unobtrusive on the landscape.

### Key features:

- Continuous 5 rail fence system and H frame makes installation easy
- Supplied loose in 5000mm sections for erection on site
- Overall height is 1200mm
- 20mm dia horizontal top rail and 4 subsequent lower flat rails
- Galvanised to BS EN ISO 1461
- All required clips and fittings are supplied as standard

1200mm and 3600mm single leaf gates and kissing gates are available from stock. Bespoke sizes and double leaf gates are available on a made to order basis.

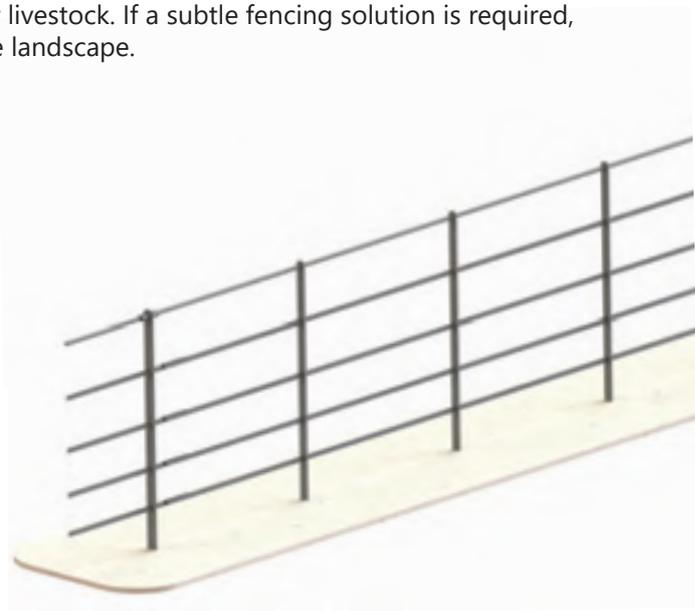

## Corn Bins

Our corn bins are available in two sizes, 1200mm (630 litres) and 1600mm (840 litres). The smaller corn bin comes complete with one optional partition, while the larger one is purchased with two optional partitions. The partitions are easily added depending on how many partitions you wish to include in your corn bin.

### Key features:

- Fully constructed from pre-galvanised sheet with pressed creases throughout the design to offer extra strength
- Two padlockable Protex spring claw latches for increased security
- Supplied with three robust 50mm butt hinges
- Profiled stays enable the lid to be propped open
- Optional partitions
- Nuts are not required as all the punch holes are complete with a thread
- Some self assembly is required

### 630 litre Corn Bin



- 630 litres - one partition
- 1200mm long x 640mm wide x 900mm high

Code	Product Information
1002135-01	c/w 1 partition (2 sections)

### 840 litre Corn Bin



- 840 litres - two partitions
- 1600mm long x 640mm wide x 900mm high

Code	Product Information
1002139-01	c/w 2 partitions (3 sections)

Only suitable for holding feed in bags, not suitable for loose feed.

## Dog Penning

- All our dog penning conforms with all Environmental Health Model License Agreements
- 1840mm high
- 75mm vertical gaps to conform to industry standards for medium to large breeds
- Available in 3 lengths- 1000mm, 1500mm, 2000mm
- All panels sit 50mm off the ground to allow for easy cleaning out
- 625mm wide door opens inwards for operator safety
- Vertical railings constructed from 8mm bar and include a central brace to prevent bar separation

Code	Product Information
F084 2000 05	1500mm long dog pen front panel c/w gate
F084 2000 06	2000mm long dog pen front panel c/w gate
F084 2001 05	1500mm long dog pen side/back panel
F084 2001 06	2000mm long dog pen side/back panel
F084 2001 07	1000mm long dog pen side/back panel
F084 2010 01	Bolt down foot
F084 2011 01	Roof bracket



Roof Bracket

Bolt Down Support



Foot support brackets allow you to bolt panels to the floor and cope with small changes in floor levels







## Moorland Stabling

IAE have been manufacturing Equestrian Stabling for over 25 years. Our long-standing position within the industry, combined with the undertaking of many prestigious equestrian projects, has enabled us to refine our Equestrian range to be durable, versatile and excellent value.

Drawing on some of our best previous concepts and design features, we now offer the Moorland Stabling range, which comprises of a variety of frontages, partitions and accessories. The Moorland range is designed to be a modular and standardised solution, allowing you to purchase the individual items you need and combine them to create your optimal solution. All aspects of the Moorland stabling range are manufactured using a combination of advanced manufacturing technology and high-quality materials, ensuring that the stabling you purchase will stand the test of time.

Key considerations have been accounted for whilst designing this range, which includes being able to accommodate for a fall of 50mm across frontages or partitions as well as the option to achieve a bespoke layout by using our various panel designs in conjunction with our unique bracket which allows for panels to be cut to special lengths. (p.127).

**Key features of Moorland Stabling:**

- Stable fronts and partitions are available in three different lengths: 2970mm, 3570mm and 4170mm (post centres)
- Three different front options are available: bottom swing door, anti-weave swing door and anti-weave sliding door
- Universal any hand swing doors. Supplied from the factory left handed, however bolt on fittings allow for easy conversion to right hand
- Three different variations of partition are available: half grille, fully boarded or talke grille
- All infills created from 34mm recycled solid plastic tongue and groove boards
- The plastic infills are low maintenance, durable and weatherproof
- Additional accessories such as swivel feeders, anti-chew strips and anti-weave infill panels can be purchased at extra cost
- External split doors and window hatches are also available
- All stabling is supplied in kit form and requires assembly on site

**Optional Extras**

**Corner Hayrack**



The Corner Hayrack shown in conjunction with the hatch panel behind.

- Designed to allow horses to feed in a natural position
- 1923mm high, constructed from galvanised steel to ensure durability
- For use in conjunction with the Frontage with Hatch


Corner Hayrack

Code 104493

Corner Hayrack against a Wall Full Board

Code 104494

**Anti-weave Infill Panel**

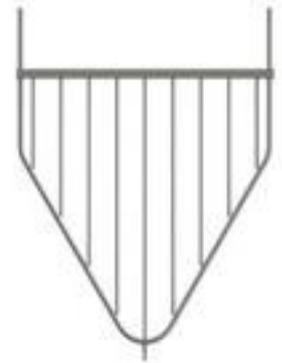

Code  
F093 2001 13

**Swivel Feeder-Plastic Trough**



Code  
F093 2003 32

**Moorland External Boarded Window Hatch**



External boarded window hatch to suit a 915mm square gap

Code  
F093 2003 44

**Moorland External Split Door In Frame**



Code	Product Information
F093 2003 41	Suits a gap of 1305mm wide x 2320mm high

**Moorland Tack Room Door In Frame**




Code	Product Information
F093 2003 41	Suits a gap of 970mm wide x 2320mm high




### Front Options

Moorland front with bottom swing door, panel and 2 posts

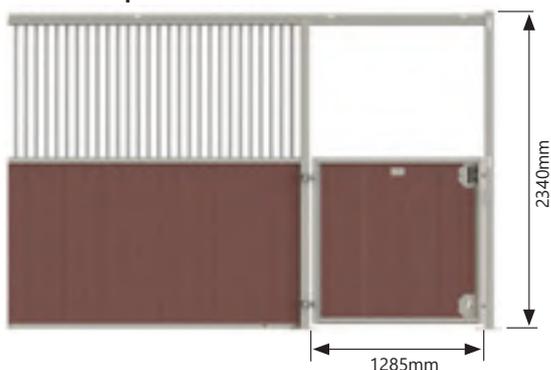

Code	Product Information
F093 2002 11	2970mm post centres
F093 2002 12	3570mm post centres
F093 2002 13	4170mm post centres
F093 2002 81	End Post to finish the run

Moorland front with anti-weave sliding door, panel and 2 posts

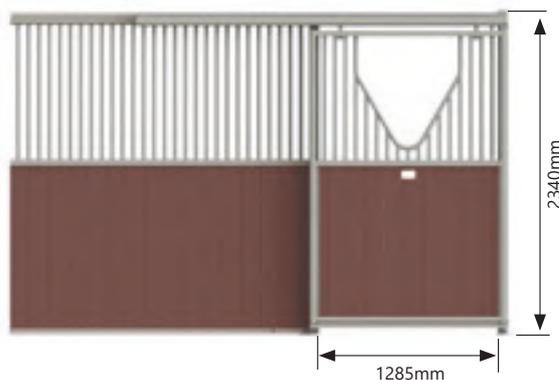

Code	Product Information
F093 2002 31	2970mm post centres
F093 2002 32	3570mm post centres
F093 2002 33	4170mm post centres
F093 2002 81	End Post to finish the run

### Moorland Tack Room Front



Comprising of full height lockable swing door, panel and 2 Posts

Code	Product Information
F093 2003 22	3570mm post centres

### Partition/Back Options

#### Moorland Half Grille Stable Partition




Partition includes post

Code	Post Centres
F093 2002 44	2970mm
F093 2002 42	3570mm
F093 2002 46	4170mm

Back (no post included)

Code	Post Centres
F093 2002 64	2970mm
F093 2002 62	3570mm
F093 2002 66	4170mm

### Moorland Talk Grille Partition

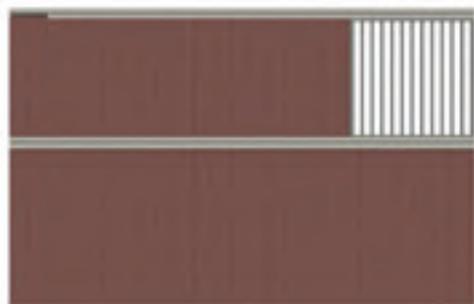


Partition includes post

Code	Post Centres
F093 2003 04	2970mm
F093 2003 02	3570mm
F093 2003 06	4170mm

940mm long talk grille can be positioned anywhere along the top section of the partition

### Moorland Fully Boarded Stable Partition

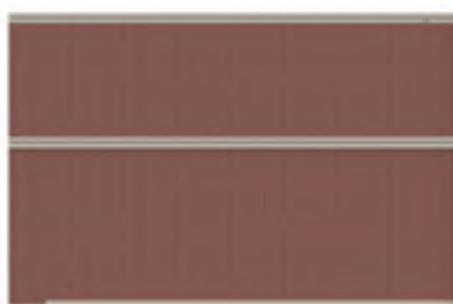

Partition includes post

Code	Post Centres
F093 2002 54	2970mm
F093 2002 52	3570mm
F093 2002 56	4170mm

Back (no post included)

Code	Post Centres
F093 2002 74	2970mm
F093 2002 72	3570mm
F093 2002 76	4170mm





MESH  
SYSTEMS

## DID YOU KNOW?

IAE also has a successful Industrial Division. With over three decades of industry experience, and through working with many Architects, Specifiers, Contractors, Local Governments and Councils, we manufacture and supply a high quality range of products that have been designed to meet the needs of you and your customer. This coupled with our unrivalled, in-house and advanced manufacturing processes allows us to deliver a product of the highest quality at a competitive price.

RAILINGS

**Product ranges within our industrial division include:**

Mesh Systems, Railings, Sports Systems, Industrial Fit Out and Shelters



**INDUSTRIAL  
FIT OUT**



**SHELTERS**



**SPORTS  
SYSTEMS**

The UK's leading manufacturer and supplier of Industrial products:  
[fencing@iae.co.uk](mailto:fencing@iae.co.uk)

## Corrosion of Galvanised Steel

All IAE Hot Dip Galvanised products are galvanised to the highest standards, conforming to BS EN ISO 1461. However, depending upon the environment and location the equipment is within, there is always a possibility of galvanised steel corroding in the medium to long-term, particularly in aggressive environments.

### What is Galvanising?

Hot dip galvanising is a surface treatment used to protect mild steel from corrosion. The process involves dipping chemically clean steel into a bath of molten zinc which causes a metallurgically bonded coating of zinc to form on the surface of the steel.

Zinc, like stainless steel or aluminium does not rust like mild steel. An oxide layer on its surface is created on exposure to air, which resists further corrosion. Zinc is used in galvanising as it bonds well to mild steel.

### How does Galvanising prevent corrosion?

Galvanising prevents oxygen and water from reaching the steel beneath using this zinc oxide layer on its surface. When there's moisture present this turns into zinc carbonate. This gives the metal a dull grey patina that's insoluble in water and stops any further chemical changes. In certain circumstances the galvanising will offer cathodic protection, where the zinc corrodes preferentially to the steel.

### What degrades the Zinc coating?

Typical environments or chemicals that accelerate corrosion of galvanised steel are:

- Acids or ammonia's found in animal feeds (e.g. silage) and excretion
- Strong alkalis such as cement, (especially Portland cement,) as these contain chlorides and sulphates
- Sodium Chloride (salt) in water or air (marine or coastal environments)
- Situations where coatings are wet or soaked

Present within some of the above are corrosive gasses which catalyse the corrosion of the zinc coating through the formation of carbonic and sulphuric acid respectively. These acids modify the zinc coating causing its properties to change and therefore reduce the protection against corrosion. As a result of this, ferric and ferrous oxides occur in the form of rust. Marine and salty environments lower the lifetime of galvanised steel because the high electrical conductivity of sea or air increases the rate of corrosion, primarily through converting the solid zinc to soluble zinc chloride which is then washed away.

### What can be done to increase a galvanised items lifespan?

Applying a secondary layer of protection to a galvanised item that is particularly susceptible to corrosion is the primary method of increasing corrosion resistance. This is known as a "duplex system".

Coating the lower section of posts with bituminous paint prior to installing into concrete is a recognised method of increasing a posts lifespan, protecting it from acids and ammonias present in animal excretion. Coating feed to water troughs with food safe paint or resin is also common practice. Where additional coatings cannot be practically applied, ensuring products are washed down frequently where exposed to aggressive environments, and keeping products dry where possible will both increase longevity.

For more information visit [www.iae.co.uk/corrosion](http://www.iae.co.uk/corrosion)



<b>A</b>					
AG-FIT®	58				
<b>AGRICULTURAL PROJECTS</b>	<b>5</b>				
<b>B</b>					
<b>BULL PENNING</b>	<b>64</b>				
<b>C</b>					
<b>CALF PENNING</b>					
Calf Creep feeder	76				
Double Sided Mesh Haybasket	75				
Fittings to Standard Calf Pens	75				
Fully Sheeted Back Panel	74				
Large Calf Dehorning Crate	76				
Part Sheeted Side Panels	74				
Small Calf Dehorning Crate	76				
Six Railed Back Panel	75				
Standard Calf Pen Fronts	74				
Standard Calf Penning	74				
Standard Six Railed Side Panels	74				
<b>CATTLE CRUSHES</b>					
A800 Squeeze	12				
A800 Full Access	13				
Crusader Plus Crush	17				
Highland Crush	17				
M800 Squeeze	10				
M800 Full Access	11				
Yearling Crush	17				
<b>CATTLE CRUSHES - OPTIONAL EXTRAS</b>					
800 Series EID Fitting Kit	14				
Bolt on Angle Slotted Lugs	18				
Bolt on Slotted Lugs	18				
Cattle Crush Extension	14 & 18				
Foot Trimming Kits	16 & 18				
Front Cage	16				
Load Bar	16				
M800 Cage EID Fitting Kit	14				
MK 4.5 Superscoop	15				
Rear Sliding Gate	14 & 18				
Slotted Lugs on Drilled Plate	16				
Sternum Bar	16				
<b>COW CUBICLES</b>					
Cow Mattress	55				
Cubicle Housing Gates	53				
Herringbone A.I. and Treatment Race	54				
Rear Operating Front Opening A.I. Stalls	54				
Sand Cubicles	52				
Super Comfort	50				
Ultima Cubicles	48				
<b>D</b>					
<b>DOG PENNING &amp; FOOD STORAGE</b>	<b>123</b>				
<b>E</b>					
<b>EQUESTRIAN</b>					
Front Options	127				
Optional Extras	126				
Partition/Back Options	127				
Window/Door Options	126				
<b>F</b>					
<b>FEED BARRIERS</b>					
Feed Fences	40				
Single Rail Barrier	41				
Tombstone Feed Fence	41				
Two in One Feed Unit	42				
Yokemaster	43				
<b>FENCING</b>					
Estate Fencing And Gates	122				
Mesh Fencing	122				
<b>FIXED CATTLE HANDLING</b>					
Any Hand Forcing Rings	24				
Race Options	27				
<b>G</b>					
<b>GATES</b>					
Ashbourne	114				
Barrier Gate	115				
Big Bar	114				
Buxton Sheeted	116				
Cattle Grids	116				
Centrewire	119				
Continental Gates	117				
Deer Gate Meshed	115				
Department Of Transport	120				
Eight Rail Premier	115				
Fieldlink	118				
Five Rail Cattleyard	115				
Five Rail Half Meshed	114				
Four Rail Fully Meshed	115				
Gate Fittings	121				
Kissing Gate	120				
New Forde	115				
Post Driver	121				
Sliding Doors	116				
Wheeled Cattle Hurdle	117				
<b>H</b>					
<b>HAYRACKS AND FEED TROUGHS</b>					
Calf Feeder	111				
Double Sided Meshed Haybasket	110				
Hook Over Calf/Sheep Hayrack	110				
Hook Over Calf/Sheep Trough	111				
Hook Over Cattle Hayrack	110				
Wall Fitting Calf/Cattle Hayrack	110				
Wall Fitting Calf Trough	111				
Verti - Rack	111				
<b>I</b>					
<b>INDUSTRIAL PRODUCTS</b>	<b>128</b>				
<b>L</b>					
<b>LAMB EQUIPMENT</b>					
Eight Rail Alpaca Hurdle	78				
Lamb Adopter Front	78				
Lamb Creep Hurdle	78				
Part Meshed Lambing Hurdle	78				
Seven Rail Interlocking Sheep Hurdle	78				
<b>P</b>					
<b>PORTABLE CATTLE FEEDING</b>					
Badger Defence	71				
Barley Beef - Large Capacity Feeder	69				
Barley Beef Feeder - Single	69				
Big Beef Trough	71				
Floor Feeding Cattle Trough	70				
Free Standing Calf Trough on Legs	70				
Free Standing Cattle Trough on Legs	70				
Free Standing Portable 2 in 1 Feeder	69				
Goliath Calf Trough	70				
Heavy Duty Circular Feeder	68				
Heavy Duty Floor Feeding Bullock Trough	70				
High Density Feeder - Steel Base	68				
Rectangular Feed Bin - Steel Base	68				
Tombstone	68				
Yearling Circular Feeder	68				
<b>PORTABLE CATTLE HANDLING</b>					
Adjustable Race Joining Arch	33				
Backing Up Bar	33				
Cattle Stop Gate In Frame	33				
Cattle Lugs On Vertical Plates	33				
Chieftain Yoke Gate In Frame	36				
Coupling Bar	30				
Deluxe Calving Hurdle	37				
Portable Cattle Handling Starter Kit	30				
Race Joining Arch	32				
Race Joining Arch With Gate	32				
Rotex®	34				
Saracen Yoke Gate In Frame	36				
Six Rail Hurdle	31				
Six Rail Gates Built Into Hurdle Frame	31				
Six Rail Hurdle with Access Gate	31				
Six Rail Hurdle with Diverter Gate	31				
Sliding Gate In Race Joining Arch	33				
Support Posts	32				
<b>PORTABLE SHEEP FEEDING</b>					
Corrugated Lid for Sheep Feed Cradle	99				
Diagonal Rail Sheep Circular Feeder	98				
Double Sided Lamb Creep Feeder	100				
DSLFCF Trained Kit	100				
Hook Over Calf/Sheep Hayracks	100				
Hook Over Sheep Trough	101				
Horned Sheep Circular Feeder	98				
Sheep Feed Cradle	99				
Sheep Hayrack on Wheels	101				
Sheep Round Bale Feeder	99				
Single Sided Lamb Creep Shelter	100				
Sheep Square Bale Feeder	99				
Standard Sheep Circular Feeder	98				
Standard Sheep Feed Trough	101				
Vertical Rail Rectangular Sheep Feeder	99				
<b>S</b>					
<b>SHEEP HANDLING</b>					
Circular Sheep Forcing Rings	87				
Clip On Non Return Gate	90				
Drop Gate In Race Joining Frame	90				
Digital Lamb Weigher	93				
Economy Portable Sheep Race	87				
Fittings to suit Sheep Equipment	91				
Four Railed Fully Sheeted Sheep Hurdles	88				
Fully Meshed Drafting/Stop Gate	89				
Fully Sheeted Sheep Shedding Hurdles	88				
Fully Sheeted Slipway Hurdles	91				
Gate In Race Joining Frame	90				
Guillotine Gates in Frames	89				
Kwik Turnover Crate	92				
Non Return Gate/In Race Joining Arch	90				
Non Return Gate/Stop Gate In Frame	90				
Ovihandler	93				
Prattley	94				
Race Joining Frame	90				
Radiused Sheeted Hurdles	88				
Self Locking Yoke In Race Frame	90				
Sheep Docking Crate	92				
Sheep Foot Bath	92				
Sheep Sliding/Stop Gate In Race Frame	90				
Sheep Swing Gate Built Into Frame	90				
Sheep System A	85				
Sheep System A Basic Kit	84				
Sheep System A Starter Kit	84				
Sheep System B	85				
Sheep System C	86				
Sheep System D	86				
Six Railed Sheep Hurdles	88				
Six Railed Sheep Hurdles With Gate	88				
Six Railed Sheep Sliding Gate Hurdles	88				
Six Rail Pair of Sheep Gates	91				
Swing and Slide Gate	91				
Three Way Drafting/Stop Gate	89				
Two Way Support Posts	91				
<b>SHEEP HOUSING</b>					
Adjustable Sheep Hurdle	80				
Adjustable Sheep Hurdle with Access Gate	80				
Bolt on Sheep Lugs	81				
Clip on End Panel	81				
Self Closing Gate End	81				
Standard Walk Through	81				
Trough End	81				
Trough Joiner Inserts	81				
Vertical Railed Sheep Feed Hurdle	80				
Vertical Railed Sheep Feed Hurdle with Gate	80				
<b>W</b>					
<b>WATER TROUGHS</b>					
457mm Cattle Water Trough	104				
1200mm Large Capacity Water Trough	104				
457mm Sheep Water Trough	104				
610mm Cattle Water Trough	104				
High Backed Water Trough	104				
Self Fill Water Bowls	106				
Service Box	104				
Quick Empty Water Troughs	105				
Universal Drinkers	106				
Visor Drink	107				
<b>WEIGHING SYSTEMS &amp; EID</b>	<b>21</b>				

# TERMS AND CONDITIONS

## 1. INTERPRETATION

### 1.1 Definitions:

"Acknowledgment": the written confirmation of order issued by the Supplier confirming the Customer's Order.

"Affiliate": means any entity that directly or indirectly Controls, is Controlled by or is under common Control with another entity.

"Approval Drawings": means drawings produced by the Supplier for specific approval by the Customer.

"Bespoke Goods": means any engineered to order Goods which are made to a Customer's Specification.

"Business Day": a day (other than a Saturday, Sunday or public holiday) when the banks in London are open for business.

"Cancellation Fee": means a fee which is equivalent to the costs incurred by the Supplier in manufacturing MTO Goods or Bespoke Goods (where no deposit has been paid) which may include, without limitation, the raw material, labour, design and manufacturing costs incurred by the Supplier as at the date of cancellation.

"Conditions": the terms and conditions set out in this document as amended from time to time in accordance with clause 11.4.

"Contract": the contract between the Supplier and the Customer for the sale and purchase of the Goods in accordance with these Conditions.

"Control": means the beneficial ownership of more than 50% of the issued share capital of a company or the legal power to direct or cause the direction of the management of the company;

"Customer": the person, firm, organisation or other entity who purchases the Goods from the Supplier either as End User or on behalf of an End User (including for the avoidance of doubt, any dealer or agent).

"Delivery Location": the location to which the Goods are to be delivered as set out in the Order or as otherwise agreed by the Supplier in accordance with these Conditions.

"Deposit": a sum of up to 50% of the price as set out in the Acknowledgment, which is non-refundable.

"End User": means, where applicable, any person or persons to whom the Customer sells on or hands over the Goods.

"Force Majeure Event": an event or circumstance beyond a party's reasonable control.

"Goods": the goods (or any part of them) set out in the Order.

"MTO Goods": standard Goods which are made to order for a specific Customer.

"Order": the Customer's order for the Goods as confirmed by the Supplier's written Acknowledgment.

"Specification": any specification for the Goods, including any related plans and drawings that are agreed in writing by the Customer and the Supplier.

"Supplier": F.Klucznik & Son Ltd trading as IAE (registered in England and Wales with company number 01448116).

### 1.2 Interpretation:

1.2 a reference to a statute or statutory provision is a reference to such statute or provision as amended or re-enacted. A reference to a statute or statutory provision includes any subordinate legislation made under that statute or statutory provision, as amended or re-enacted.

1.2.2 any phrase introduced by the terms including, include, in particular or any similar expression shall be construed as illustrative and shall not limit the sense of the words preceding those terms. a reference to writing or written includes emails but not faxes.

## 2 BASIS OF CONTRACT

2.1 These Conditions apply to the Contract to the exclusion of any other terms that the Customer seeks to impose or incorporate, or which are implied by trade, custom, practice or course of dealing.

2.2 The Order constitutes an offer by the Customer to purchase the Goods in accordance with these Conditions. The Customer is responsible for ensuring that the terms of the Order and any applicable Specification submitted by the Customer are complete and accurate.

2.3 The Order shall be deemed to be accepted by the Supplier on the earlier of:

2.3.1 the date upon which the Supplier commences any work in relation to the Customer's order for Bespoke Goods (including, without limitation any drawing or preparation of manufacturing documents) or MTO Goods; 2.3.2 the date upon which the Supplier issues an Acknowledgment and, if requested by the Supplier, the Customer has paid in cleared funds the Deposit at which point the Contract shall come into existence. The Supplier may accept or reject an Order at its discretion at any time prior to acceptance.

2.4 The Customer waives any right it might otherwise have to rely on any term endorsed upon, delivered with or contained in any documents of the Customer that is inconsistent with these Conditions.

2.5 Any samples, drawings, descriptive matter or advertising produced by the Supplier (other than Approval Drawings) and any descriptions or illustrations contained in the Supplier's catalogues or brochures are produced for the sole purpose of giving an approximate idea of the Goods referred to in them. They shall not form part of the Contract nor have any contractual force.

2.6 A quotation for the Goods given by the Supplier is an invitation to treat only and shall not constitute an offer and are incapable of being accepted by the Customer. A quotation shall only be valid for a period of 14 days from its date of issue unless otherwise stated.

## 3 GOODS AND CANCELLATION

3.1 The Goods are described in the Supplier's catalogue as modified by any applicable Specification.

3.2 Where Goods are manufactured to a Customer's Specification, the Customer takes full responsibility for that Specification and any related plans and drawings made by the Supplier based upon that Specification which are accepted by the Customer prior to manufacture of the Goods.

3.3 To the extent that the Goods are to be manufactured in accordance with a Specification supplied by the Customer, the Customer shall indemnify the Supplier against all liabilities, costs, expenses, damages and losses (including any direct, indirect or consequential losses, loss of profit, loss of reputation and all interest, penalties and legal and other reasonable professional costs and expenses) suffered or incurred by the Supplier in connection with any claim made against the Supplier for actual or alleged infringement of a third party's intellectual property rights arising out of or in connection with the Supplier's use of the Specification. This clause 3.3 shall survive termination of the Contract.

3.4 The Supplier reserves the right to amend the Specification of the Goods if required by any applicable statutory or regulatory requirements.

3.5 The Supplier retains all intellectual property rights in all drawings (including, without limitation, Approval Drawings), designs and plans prepared in connection with the Goods and in the design of the Goods themselves.

## 4 DELIVERY

4.1 The Supplier shall ensure that each delivery of the Goods is accompanied by a delivery note that shows the date of the Order, all relevant Customer and Supplier reference numbers, the type and quantity of the Goods

(including the code number of the Goods, where applicable), the number of pallets used in packing the Goods special storage instructions (if any).

4.2 If the Supplier requires the Customer to return any packaging materials to the Supplier, including pallets, this shall be stated on the delivery note or notified to the Customer in writing. Returns of packaging material by the Customer in accordance with this clause 4.2 shall be at the Supplier's expense. Where the Customer is required to return any packaging materials these must be returned to the Supplier within 8 weeks of delivery. Packaging materials which are not returned by the Customer to the Supplier shall be disposed of by the Customer responsibly and in accordance with all applicable regulations regarding waste disposal.

4.3 Where packaging materials are to be collected by the Supplier, the Customer shall make any such packaging materials available for collection at such times as the Supplier shall reasonably request. The Supplier shall be responsible for the costs of collecting packaging materials save where the Supplier is required to collect packaging materials left at a location other than the delivery address stated on the delivery note in which case the Customer shall be responsible for the costs of collection.

4.4 The Supplier may deliver the Goods by separate instalments and, save where Goods are delivered in separate instalments but all relate to the same Order, each separate instalment shall be treated as a separate contract and shall be invoiced and paid for separately. Any delay in delivery or defect in an

instalment shall not entitle the Customer to cancel any other instalment.

4.5 Any costs of delivery payable by the Customer shall be set out in the Acknowledgment and the Supplier has the right to pass on to the Customer any unforeseen additional costs they incur in delivering the Goods.

4.6 The Supplier shall deliver the Goods to the Delivery Location at any time after the Supplier notifies the Customer that the Goods are ready. Any changes to the delivery address must be notified to the Supplier at least two weeks prior to the scheduled delivery date and the Supplier reserves the right to charge additional delivery costs if the delivery address is changed at any time after the Order is accepted or the original address provided by the Customer is incorrect.

4.7 Delivery is completed on the completion of unloading of the Goods at the Delivery Location.

4.8 Any times and dates quoted for delivery are approximate only, and the time of delivery is not of the essence. The Supplier shall not be liable for any delay in delivery of the Goods that is caused by a Force Majeure Event or the Customer's failure (i) to make the Delivery Location available (ii) to provide the Supplier with adequate delivery instructions or any other instructions that are relevant to the supply of the Goods, or (iii) to prepare the Delivery Location as required for the Goods.

4.9 If the Supplier fails to deliver the Goods in their entirety, its liability shall be limited to the actual cost incurred by the Customer in obtaining replacement goods of similar description and quality in the cheapest market available, less the price of the Goods. The Supplier shall have no liability for any failure to deliver the Goods to the extent that such failure is caused by a Force Majeure Event or the Customer's failure to provide the Supplier with adequate delivery instructions or any other instructions that are relevant to the supply of the Goods.

4.10 It is the Customer's responsibility to check that all Goods have been delivered and to notify the Supplier within three Business Days if any Goods have not been delivered. If the Supplier delivers some but not all of the Goods which are due to be delivered in any instalment or delivery the Customer may not reject them or cancel the order, but shall notify the Supplier in accordance with this clause and on receipt of such notice from the Customer, the Supplier shall deliver the missing Goods within a reasonable time. If the Supplier is unable to do this, a pro rata adjustment shall be made to the Order invoice. Where the Supplier has delivered Goods in excess of those stated on the Order, the Supplier shall have a reasonable time within which to collect the Goods and the Customer shall store the excess Goods safely until they are collected.

4.11 The Customer is advised not to make any arrangements for the installation for the Goods until the Goods have been delivered and the Customer is satisfied that the Goods have been delivered in full. The Supplier shall not be responsible for any costs or expenses incurred by the Customer in relation to the installation or planned installation of the Goods.

4.12 If the Customer fails to take delivery of or collect the Goods within three Business Days of the Supplier notifying the Customer that the Goods are ready, then, except where such failure or delay is caused by a Force Majeure Event or the Supplier's failure to comply with its obligations under the Contract:

4.12.1 delivery of the Goods shall be deemed to have been completed at 9.00 am on the third Business Day after the day on which the Supplier notified the Customer that the Goods were ready; and

4.12.2 the Supplier shall store the Goods at the Customer's risk until delivery takes place, and charge the Customer for all related costs and expenses (including insurance).

4.13 If ten Business Days after the day on which the Supplier notified the Customer that the Goods were ready for delivery or collection the Customer has not taken delivery of them or collected them, the Order shall be treated as cancelled and the Supplier may resell or otherwise dispose of part or all of the Goods and may charge the Customer for any re-stocking fee (in the case of standard stock products), retain any Deposit paid by the Customer in relation to Bespoke Goods or charge a Cancellation Fee in accordance with clause 5.1.

In relation to Goods sold by the Supplier to any Customer for delivery outside England, mainland Scotland and Wales shipping and insurance shall be payable by the Customer unless otherwise agreed with the Supplier. The Customer shall be responsible, at its own expense for obtaining any licence and complying with any export regulations in force within the UK and any country to which the Goods are to be delivered.

## 5 CANCELLATION

5.1 If following the acceptance of the Order under clause 2.3, the Customer wishes to cancel the Order then the Customer must give Supplier at least five Business Days' written notice, if the Order relates to Bespoke Goods or MTO Goods and the Supplier has commenced work on the Order (including time spent upon drawings and designs) then the Supplier is entitled to retain any Deposit to cover the costs incurred and, if no Deposit has been paid, is entitled to charge the Customer a Cancellation Fee which shall be invoiced to the Customer following the date of cancellation.

5.2 Should the Customer cancel or return an Order for or fail to take delivery of standard stock items, the Supplier reserves the right to charge a restocking fee which will be an amount equivalent to 20% of the price payable by the Customer in respect of the returned Goods or cancelled Order.

5.3 Where Goods are delivered in instalments, each instalment shall be a separate contract and cancellation of any one contract relating to an instalment shall not entitle the Customer to repudiate or cancel any other contract or instalment.

## 6 QUALITY

6.1 The Supplier warrants that on delivery, and for a period of 12 months from the date of delivery ("warranty period"), the Goods shall:

6.1.1 conform in all material respects with their description and any applicable Specification; and

6.1.2 be free from material defects in design, material and workmanship; and

6.1.3 be of satisfactory quality (within the meaning of the Sale of Goods Act 1979); and

6.1.4 be fit for any purpose held out by the Supplier.

6.2 Subject to clause 6.3, if:

6.2.1 the Customer gives notice in writing to the Supplier within three Business Days of discovery that some or all of the Goods do not comply with the warranty set out in clause 6.1;

6.2.2 provides to the Supplier a valid proof of purchase for the Goods;

6.2.3 the Supplier is given a reasonable opportunity of examining such Goods; and

6.2.4 the Customer (if asked to do so by the Supplier) returns such Goods to the Supplier's place of business at the Customer's cost,

the Supplier shall, at its option, repair or replace the defective Goods, or refund the price of the defective Goods in full. The warranty set out in clause 6.1 is not transferable other than from a Customer to an End-User when the Goods are also transferred to that End-User.

6.3 The Supplier shall not be liable for the Goods failure to comply with the warranty set out in clause 6.1 in any of the following events:

6.3.1 the Customer makes any further use of such Goods after giving notice in accordance with clause 6.2;

6.3.2 the defect arises because the Customer failed to follow the Supplier's oral or written instructions as to the storage, commissioning, installation, use and maintenance of the Goods or (if there are none) good trade practice regarding the same;

6.3.3 the defect arises as a result of the Supplier following any drawing, design or Specification supplied by the Customer and agreed by the Supplier with the Customer;

6.3.4 the Customer alters or repairs such Goods without the written consent of the Supplier;

6.3.5 the defect arises as a result of fair wear and tear, willful damage, negligence, or abnormal storage or working conditions; or

6.3.6 the Goods differ from their description as a result of changes made to ensure they comply with applicable statutory or regulatory requirements.

6.4 Except as provided in this clause 6, the Supplier shall have no liability to the Customer in respect of the Goods' failure to comply with the warranty set out in clause 6.1.

6.5 The terms implied by sections 13 to 15 of the Sale of Goods Act 1979 are, to the fullest extent permitted by law, excluded from the Contract.

## 7 TITLE AND RISK

7.1 The risk in the Goods shall pass to the Customer on completion of delivery or deemed completion of delivery under clause 4.12.1, or on the date when the Supplier confirms to the Customer that the Goods are ready for collection.

7.2 Title to the Goods shall not pass to the Customer until the earlier of:

7.2.1 the Supplier receiving payment in full (in cash or cleared funds) for the Goods and any other goods that the Supplier has supplied to the Customer in respect of which payment has become due, in

which case title to the 7.2 Goods shall pass at the time of payment of all such sums; and 7.2.2 the Customer resells the Goods, in which case title to the Goods shall pass to the Customer at the time specified in clause 7.4.

7.3 Until title to the Goods has passed to the Customer, the Customer shall:

7.3.1 store the Goods separately from all other goods held by the Customer so that they remain readily identifiable as the Supplier's property;

7.3.2 not remove, deface or obscure any identifying mark or packaging on or relating to the Goods;

7.3.3 maintain the Goods in satisfactory condition and keep them insured against all risks for their full price from the date of delivery;

7.3.4 notify the Supplier immediately if it becomes subject to any of the events listed in clauses 9.1.2 to 9.1.5; and

7.3.5 give the Supplier such information relating to the Goods as the Supplier may require from time to time; and

7.3.6 on reasonable notice permit the Supplier to inspect the Goods during the Customer's normal business hours.

7.4 Subject to clause 7.5, the Customer may resell or use the Goods in the ordinary course of its business (but not otherwise) until such time as it becomes aware or ought reasonably to have become aware than an event specified in clauses 9.1.2 to 9.1.5 has occurred or is likely to occur before the Supplier receives payment for the Goods. However, if the Customer resells the Goods before that time:

7.4.1 it does so as principal and not as the Supplier's agent; and

7.4.2 title to the Goods shall pass from the Supplier to the Customer immediately before the time at which resale by the Customer occurs.

7.5 If before title to the Goods passes to the Customer the Customer becomes subject to any of the events listed in clause 9.1.2 to 9.1.5, then, without limiting any other right or remedy the Supplier may have:

7.5.1 the Customer's right to resell the Goods or use them in the ordinary course of its business ceases immediately; and

7.5.2 the Supplier may at any time:

7.5.2.1 require the Customer to deliver up all Goods in its possession that have not been resold, or irrevocably incorporated into another product; and

7.5.2.2 if the Customer fails to do so promptly, enter any premises of the Customer or of any End User where the Goods are stored in order to recover them.

7.6 In relation to Goods sold by the Supplier to Customers outside England, mainland Scotland and Wales, risk in the Goods shall pass to the Customer at the point at which the Goods leave the Supplier's premises.

## 8 PRICE AND PAYMENT

8.1 The price of the Goods and any Deposit payable shall be the price set out in the Supplier's quotation and confirmed in the Acknowledgment.

8.2 The Supplier may, by giving notice to the Customer at any time before delivery, increase the price of the Goods to reflect any increase in the cost of the Goods that is due to:

8.2.1 any factor beyond the Supplier's control (including foreign exchange fluctuations, increases in taxes and duties, and increases in labour, materials and other manufacturing costs);

8.2.2 any request by the Customer to change the delivery date(s), Delivery Location, quantities or types of Goods ordered, or the Specification; or

8.2.3 any delay caused by any instructions of the Customer or failure of the Customer to give the Supplier adequate or accurate information or instructions.

8.3 The price of the Goods:

8.3.1 excludes amounts in respect of value added tax (VAT), which the Customer shall additionally be liable to pay to the Supplier at the prevailing rate, subject to the receipt of a valid VAT invoice; and

8.3.2 (unless otherwise stated in the Supplier's quotation or Acknowledgment), excludes the costs and charges of packaging, insurance and transport of the Goods, which shall be invoiced to the Customer.

8.4 The Supplier may at any time after the date of the Acknowledgment, invoice the Customer for the amount of the Deposit or the full price of the Goods.

8.5 The Customer must pay the invoice for the Deposit (or the full price if requested in the Acknowledgment as the case may be) in full and in cleared funds before delivery or collection of the Goods is permitted. If payment in full is not required prior to delivery or collection, the Supplier shall invoice the Customer for the Goods either:

8.5.1 if Goods are being delivered, once the Goods have been despatched to the Customer; or

8.5.2 in the case of Goods which are being collected, at any time after the date upon which the Customer has been notified that the Goods are ready for collection.

8.6 The Deposit shall be non-refundable and where Orders are cancelled or Goods returned or rejected by a Customer, the Deposit shall belong to the Supplier who shall be entitled to apply the Deposit against its costs of manufacturing the Goods. In the case of Bespoke Goods, where the full price has been paid in advance of delivery and the Customer cancels the order or fails to accept delivery of the Goods, then the price paid shall be non-refundable and the Supplier shall be entitled to apply the price paid against any costs it has incurred in relation to the manufacturing of the Goods or any other costs it has incurred in relation to the Order. In the case of Orders for MTO Goods and Bespoke Goods where a Deposit or the price has not been paid in advance, the Supplier shall be entitled to charge a Cancellation Fee if an Order is cancelled in accordance with clause 5.1.

8.7 The Customer shall pay the invoice for the price (or the balance of the price where a Deposit has been paid) in full and in cleared funds by the earlier of the date of delivery or collection, or by the date which is 30 Business Days after the date of the invoice or as otherwise stated in the Acknowledgment. Payment shall be made to the bank account nominated in writing by the Supplier. Time for payment is of the essence.

8.8 If the Customer fails to make any payment due to the Supplier under the Contract by the due date for payment, then the Customer shall pay interest on the overdue amount at the rate of 4% per annum above Barclays Bank PLC's base rate from time to time. Such interest shall accrue on a daily basis from the due date until actual payment of the overdue amount, whether before or after judgment. The Customer shall pay the interest together with the overdue amount. The Supplier shall also be entitled to charge an administration fee of 10% of the price for the Goods (excluding VAT) if payments are late or are not made.

8.9 The Customer shall pay all amounts due under the Contract in full without any set-off, counterclaim, deduction or withholding (except for any deduction or withholding required by law) from any amounts due to the Supplier or its Affiliates. The Supplier may at any time, without limiting any other rights or remedies it may have, set off any amount owing to it by the Customer against any amount payable by the Supplier to the Customer. 8.10 In the event of a dispute regarding part of an Order, then the Customer shall only be entitled to withhold payment of an amount which relates to the disputed part of the Order and shall be obliged to pay all other amounts due to the Supplier and its Affiliates.

## 9 TERMINATION

9.1 Without limiting its other rights or remedies, the Supplier may terminate this Contract with immediate effect by giving written notice to the Customer if:

9.1.1 the Customer commits a material breach of any term of the Contract and (if such a breach is remediable) fails to remedy that breach within 30 days of that party being notified in writing to do so; 9.1.2 the Customer takes any step or action in connection with its entering administration, provisional liquidation or any composition or arrangement with its creditors (other than in relation to a solvent restructuring), being wound up (whether voluntarily or by order of the court, unless for the purpose of a solvent restructuring), having a receiver appointed to any of its assets or ceasing to carry on business or, if the step or action is taken in another jurisdiction, in connection with any analogous procedure in the relevant jurisdiction;

9.1.3 the Customer suspends, threatens to suspend, ceases or threatens to cease to carry on all or a substantial part of its business;

9.1.4 the Customer's financial position deteriorates to such an extent that in the Supplier's opinion the Customer's capability to adequately fulfil its obligations under the Contract has been placed in jeopardy; or

9.1.5 the Supplier has reason to believe that the Customer's credit rating has deteriorated or an event has occurred in relation to a Customer or End User (if not the Customer), which may invalidate any credit insurance policy that the Supplier may have taken out in respect of the Customer.

9.2 Without limiting its other rights or remedies, the Supplier may suspend provision of the Goods

under the Contract or any other contract between the Customer and the Supplier if the Customer becomes subject to any of the events listed in clause 9.1.2 to clause 9.1.5, or the Supplier reasonably believes that the Customer is about to become subject to any of them, or if the Customer fails to pay any amount due under this Contract on the due date for payment.

9.3 Without limiting its other rights or remedies, the Supplier may terminate the Contract with immediate effect by giving written notice to the Customer if the Customer fails to pay any amount due under the Contract on the due date for payment.

9.4 On termination of the Contract for any reason the Customer shall immediately pay to the Supplier all of the Supplier's outstanding unpaid invoices and interest.

9.5 Termination of the Contract shall not affect any of the parties' rights and remedies that have accrued as at termination, including the right to claim damages in respect of any breach of this Contract that existed at or before the date of termination.

9.6 Any provision of the Contract that expressly or by implication is intended to come into or continue in force on or after termination shall remain in full force and effect.

## 10 LIMITATION OF LIABILITY

10.1 Nothing in these Conditions shall limit or exclude the Supplier's liability for:

10.1.1 death or personal injury caused by its negligence, or the negligence of its employees, agents or subcontractors (as applicable);

10.1.2 fraud or fraudulent misrepresentation;

10.1.3 breach of the terms implied by section 12 of the Sale of Goods Act 1979; or

10.1.4 defective products under the Consumer Protection Act 1987; or

10.1.5 any matter in respect of which it would be unlawful for the Supplier to exclude or restrict liability.

10.2 Subject to clause 10.1:

10.2.1 the Supplier shall under no circumstances whatsoever be liable to the Customer, whether in contract, tort (including negligence), breach of statutory duty, or otherwise, for any loss of profit, or any indirect or consequential loss arising under or in connection with the Contract; and

10.2.2 the Supplier's total liability to the Customer in respect of all other losses arising under or in connection with the Contract, whether in contract, tort (including negligence), breach of statutory duty, or otherwise, shall in no circumstances exceed £2,000,000 (two million pounds).

## 11 FORCE MAJEURE

Neither party shall be in breach of this Contract nor liable for delay in performing, or failure to perform, any of its obligations under this Contract if such delay or failure result from a Force Majeure Event. If the period of delay or non-performance continues for three months, the party not affected may terminate this Contract by giving 7 days' written notice to the affected party.

## 12 DATA PROTECTION

Both parties shall comply with their respective obligations under all applicable data protection legislation. The Customer shall indemnify and keep indemnified the Supplier against all losses, claims, damages, liabilities, fines, sanctions, interest, penalties, costs, charges, expenses, demands and legal and other professional costs arising out of or in connection with any breach by the Customer of its obligations under this clause 12.

## 13 GENERAL

13.1 Assignment and other dealings.

13.1.1 The Supplier may at any time assign, transfer, mortgage, charge, subcontract or deal in any other manner with all or any of its rights or obligations under the Contract.

13.1.2 The Customer may not assign, transfer, mortgage, charge, subcontract, declare a trust over or deal in any other manner with any or all of its rights or obligations under the Contract without the prior written consent of the Supplier.

13.2 Confidentiality.

13.2.1 Each party undertakes that it shall not at any time disclose to any person any confidential information concerning the business, affairs, customers, clients or suppliers of the other party or of any member of the group to which the other party belongs, or the designs, drawings, plans or Specifications of any Goods supplied by the Supplier except as permitted by clause 13.2.2. For the purposes of this clause, "group" means, in relation to a party, that party, any subsidiary or holding company from time to time of that party, and any subsidiary from time to time of a holding company of that party.

13.2.2 Each party may disclose the other party's confidential information:

13.2.2.1 to its employees, officers, representatives or advisers who need to know such information for the purposes of exercising the party's rights or carrying out its obligations under or in connection with this Agreement. Each party shall ensure that its employees, officers, representatives or advisers to whom it discloses the other party's confidential information comply with this clause 13.2; and 13.2.2.2 as may be required by law, a court of competent jurisdiction or any governmental or regulatory authority.

13.2.3 No party shall use any other party's confidential information for any purpose other than to exercise its rights and perform its obligations under or in connection with this Agreement.

13.3 Entire agreement.

13.3.1 This Contract constitutes the entire agreement between the parties and supersedes and extinguishes all previous agreements, promises, assurances, warranties, representations and understandings between them, whether written or oral, relating to its subject matter.

13.3.2 Each party agrees that it shall have no remedies in respect of any statement, representation, assurance or warranty (whether made innocently or negligently) that is not set out in this Agreement. Each party agrees that it shall have no claim for innocent or negligent misrepresentation or negligent misstatement based on any statement in this Agreement.

13.4 Variation. No variation of this Contract shall be effective unless it is in writing and signed by the parties (or their authorised representatives).

13.5 Waiver. No failure or delay by a party to exercise any right or remedy provided under the Contract or by law shall constitute a waiver of that or any other right or remedy, nor shall it prevent or restrict the further exercise of that or any other right or remedy. No single or partial exercise of such right or remedy shall prevent or restrict the further exercise of that or any other right or remedy.

13.6 Severance. If any provision or part-provision of the Contract is or becomes invalid, illegal or unenforceable, it shall be deemed modified to the minimum extent necessary to make it valid, legal and enforceable. If such modification is not possible, the relevant provision or part-provision shall be deemed deleted. Any modification to or deletion of a provision or part-provision under this clause shall not affect the validity and enforceability of the rest of the Contract.

13.7 Notices.

13.7.1 Any notice or other communication given to a party under or in connection with the Contract shall be in writing, addressed to that party at its registered office (if it is a company) or its principal place of business (in any other case) or such other address as that party may have specified to the other party in writing in accordance with this clause, and shall be delivered personally, sent by pre-paid first class post or other next working day delivery service, commercial courier, or email to the email address stated in the Order or Acknowledgment or otherwise notified to the other party.

13.7.2 A notice or other communication shall be deemed to have been received: if delivered personally, when left at the address referred to in clause 13.7.1; if sent by pre-paid first class post or other next working day delivery service, at 9.00 am on the second Business Day after posting; if delivered by commercial courier, on the date and at the time that the courier's delivery receipt is signed; or, if sent by email, one Business Day after transmission. 13.7.3 The provisions of this clause shall not apply to the service of any proceedings or other documents in any legal action.

13.8 Third party rights. No one other than a party to this Contract shall have any right to enforce any of its terms.

13.9 Governing law. The Contract, and any dispute or claim (including non-contractual disputes or claims) arising out of or in connection with it or its subject matter or formation, shall be governed by and construed in accordance with the law of England and Wales.

13.10 Jurisdiction. Each party irrevocably agrees that the courts of England and Wales shall have exclusive jurisdiction to settle any dispute or claim (including non-contractual disputes or claims) arising out of or in connection with this Contract or its subject matter or formation.

For more information visit [iae.co.uk/terms-and-conditions](http://iae.co.uk/terms-and-conditions)





Our employees make the difference between IAE being a good, performing company and the industry leading company we are today. The dedication of our workforce has shaped who we are and enabled us to unlock areas of growth and sustainability that would have not otherwise been possible. We commit ourselves to creating a positive working environment so that everyone, irrespective of role, age, gender or years of service can be proud to work for us from the offset. We want all of our employees to have a voice, be engaged with their work and to learn about the culture of IAE so that our values will unite as one.

In recent years we have realised that the finest talent comes from within. Our comprehensive Apprenticeship scheme allows us to attract and nurture our next generation of success. The scheme has been designed to equip our apprentices with all of the education and skills they require to complete their role whilst also giving them the confidence to excel both in and out of the workplace.

T:+44(0)1782 339320  
sales@iae.co.uk  
Mossfield Road, Adderley Green, Longton,  
Stoke-on-Trent, ST3 5BW  
www.iae.co.uk



IAE reserve the right to alter design and specification without prior notice